

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
8/02/13	Α	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

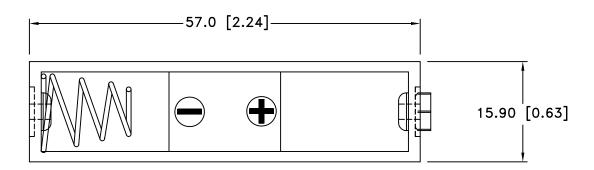

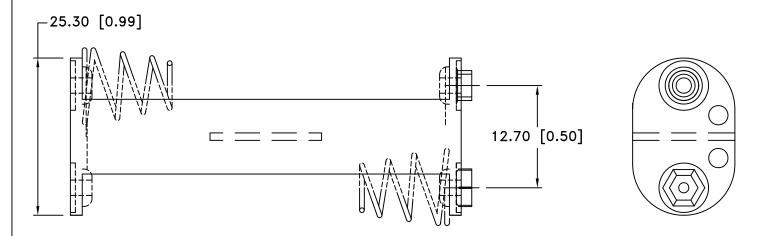

## NOTES:

Plastic material - Polypropylene, PP-1040 Flammability Rating -UL94-HB, UL File NO. E216959 Temperature Range: -10°C to +100°C Springs - Nickel Plated Spring Steel

Wire - 26 AWG, UL1007, CSA

Rivets - Brass, Nickel Plated

9Volt Snaps - Brass, Nickel Plated

Contact Resistance: Under  $50m\Omega$  for +/- contacts per EIA-540J000 ROHS 2 COMPLIANT

Tolerance (Except as noted)	Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735						
decimal			Scale	Drawn By B.S.			
±.5 (.020)				Approved By T.B.			
Fractional	Title						
± .8 (.030)	TWO "AA" CELL HOLDER WITH SNAP FASTENERS						
Angular	Date	Drawing Number					
± 3°	8/02/13	BC32AASF					