
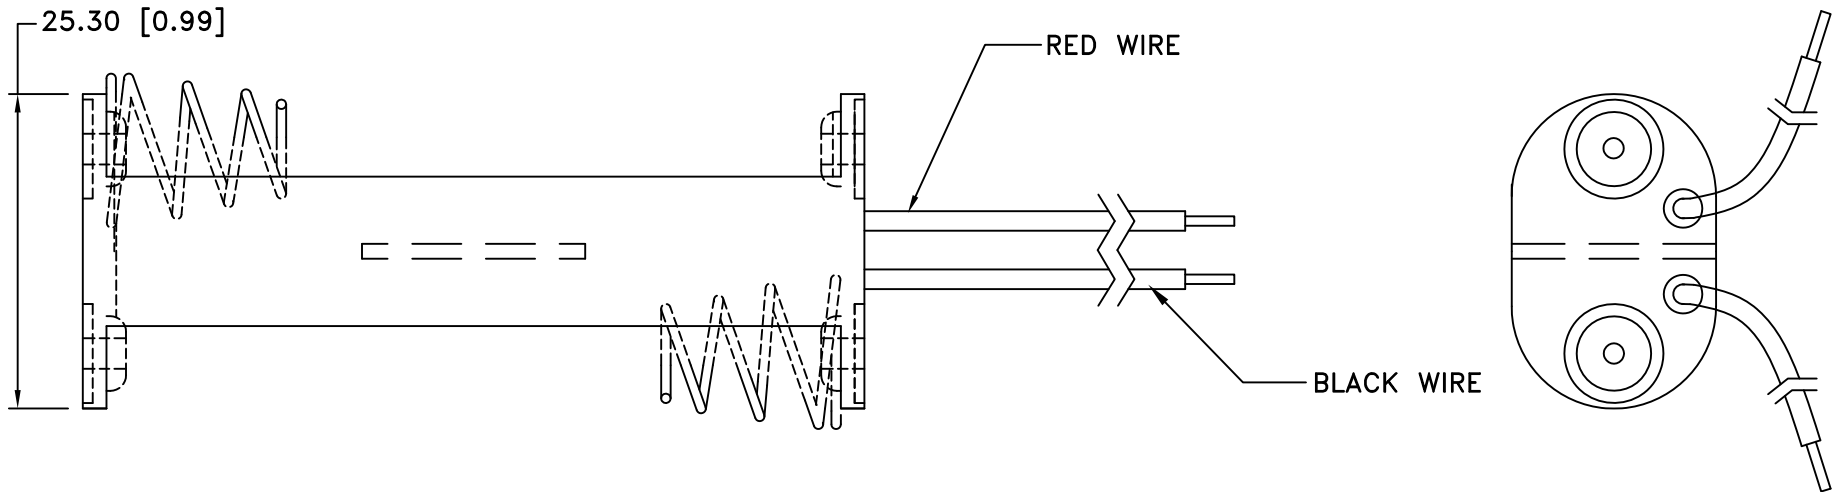



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
8/02/13	A	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

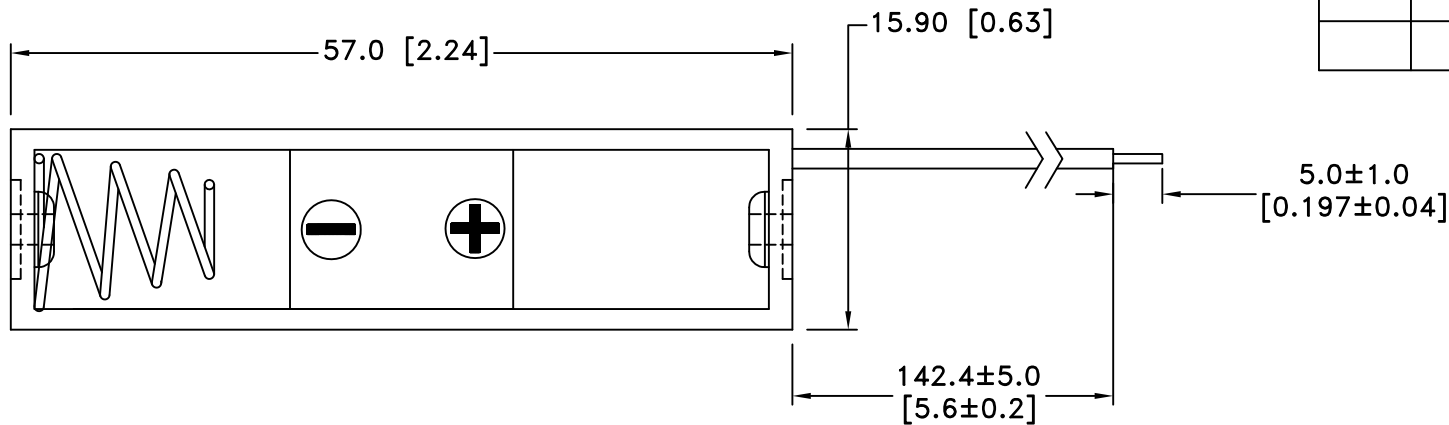

**NOTES:**

- Plastic material - Polypropylene, PP-1040
- Flammability Rating -UL94-HB, UL File NO. E216959
- Temperature Range: -10°C to +100°C
- Springs - Nickel Plated Spring Steel
- Wire - 26 AWG, UL1007, CSA
- Rivets - Brass, Nickel Plated
- 9Volt Snaps - Brass, Nickel Plated
- Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000
- ROHS 2 COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title TWO "AA" CELL HOLDER WITH WIRE LEADS	Date 8/02/13	
Fractional ± .8 (.030)		Drawing Number BC32AAW	
Angular ± 3°			