


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
8/04/07	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	

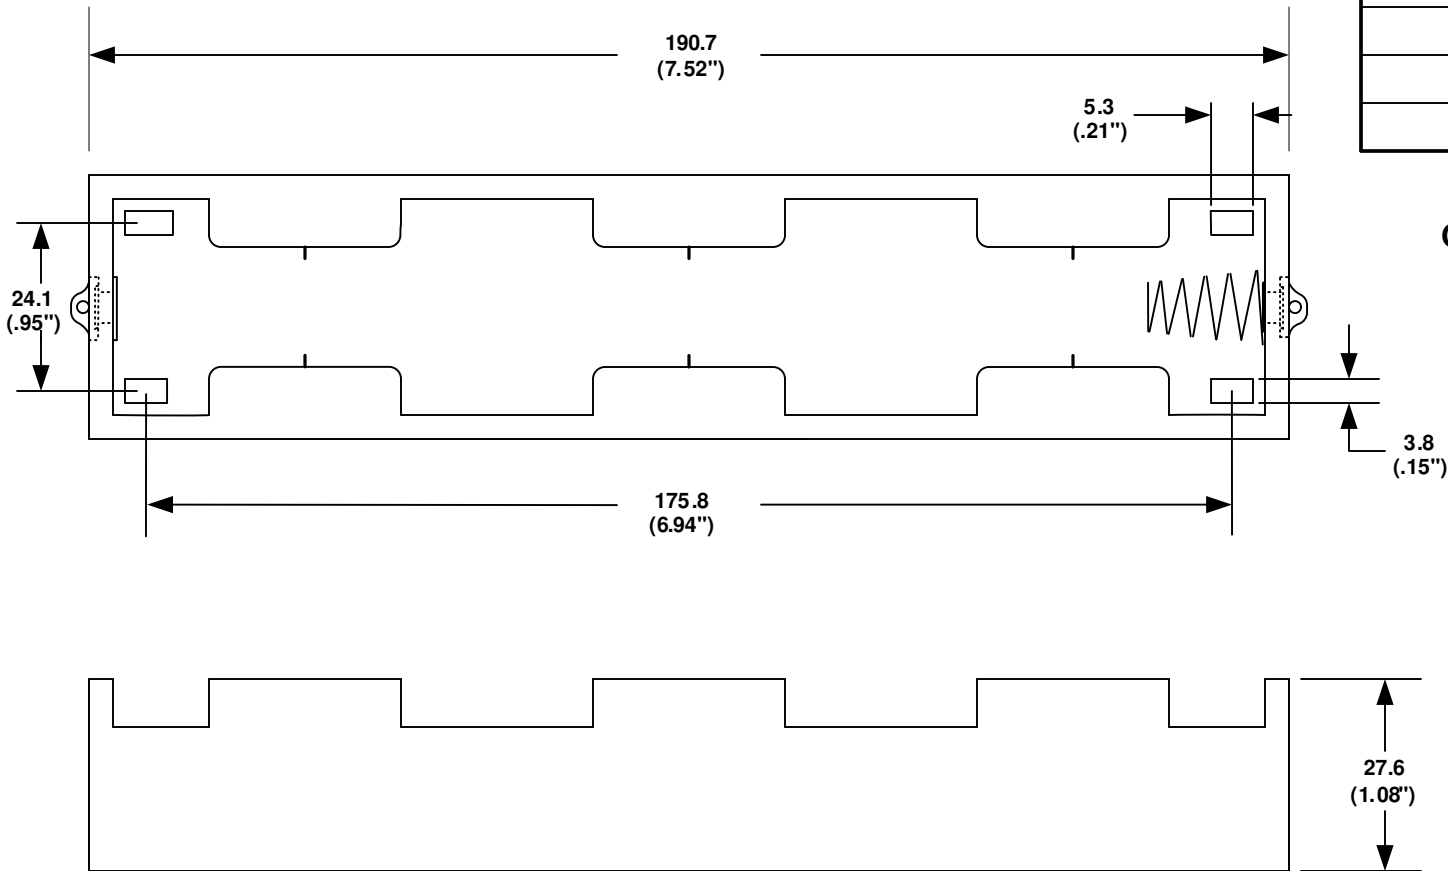

ORDERING CODE BH13D


SOLDER LUGS = L
WIRE LEADS = W

SOLDER LUGS SHOWN ABOVE

SPECIFICATIONS :

- Plastic material - Polypropylene, Black
- Flammability rating-UL94 HB, UL file no. E216959
- Temperature Range: -10°C to +100 °C
- Springs - nickel plated spring steel
- Rivets - Brass, nickel plated
- 9 Volts Snaps - Brass, nickel plated
- Contact resistance: Under 50mΩ for +/- contacts per EIA-540J000
- ROHS COMPLIANT

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)		 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL			
+ .5 (.020")			APPROVED BY
FRACTIONAL	TITLE	THREE "D" CELL HOLDER	
+ .8 (.030")			
ANGULAR	DATE	DRAWING NUMBER	
+ 3°	8/04/2007	BH13DL	