
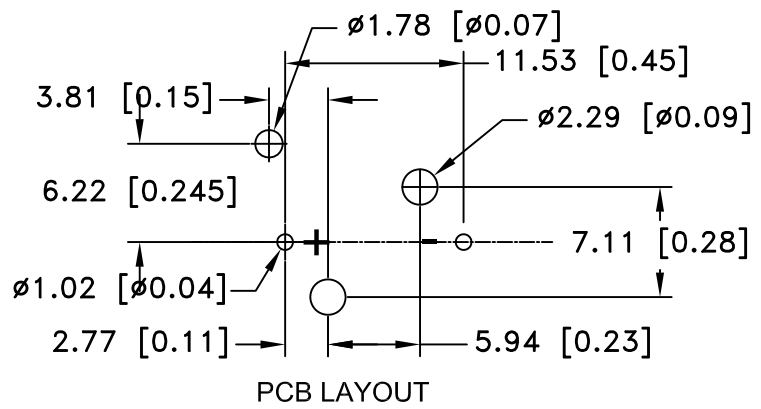




Date	SYM	REVISION RECORD	AUTH	DR.	CK.
02/29/08	A	REDRAWN ADDED "ROHS COMPLIANT"	T.B.	B.S.	
09/10/10	B	ADDED DIM. 6.22 FOR PIN LOCATION	T.B.	B.S.	

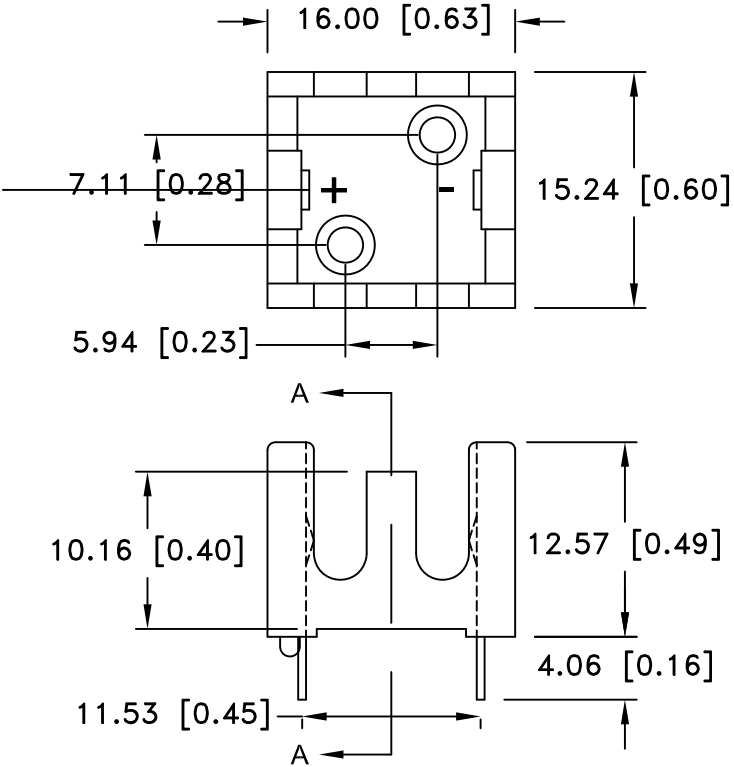

**SPECIFICATIONS:**  
 HOLDER MATERIAL: SELF EXTINGUISHING THERMOPLASTIC,  
 BLACK PBT  
 FLAMABILITY RATING:UL94V-0, FILE #E41797  
 CONTACTS: 301 SPRING TEMPER STAINLESS STEEL, NICKLE  
 PLATED OVERALL  
 DIELECTRIC STRENGTH: 560 VOLTS/MIL AT 25°C FOR 5 SEC.  
 TEMPERATURE RANGE: -55°C TO +140°C  
 RESISTANCE TO SOLVENTS: XYLENE, ETHYL , BUTYL, MRTHYL,  
 PROPYL ALCOHOL, ETHYL ACETATE,  
 HEPTANE, TOLUENE, REFRIGERANT

**NOTES:**  
 EYELET STIMPSON STYLE#A1883 0.110" OD x 0.190" FLANGE  
 FLANGE RECESS Ø0.203" x 0.090" DEEP  
 ACCEPTS STANDARD 2-56 MACHINE SCREWS  
 ACCESSORIES: BI-UM-3-4, INSULATOR  
 ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)	Scale	Drawn By B.S.	
Fractional ± .8 (.030)	Title	Approved By T.B.	
Angular ± 3°	Date	Drawing Number	
	09/10/10	BH1/3N-C	
		BH1/3N-C	