




DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
10/12/07	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	

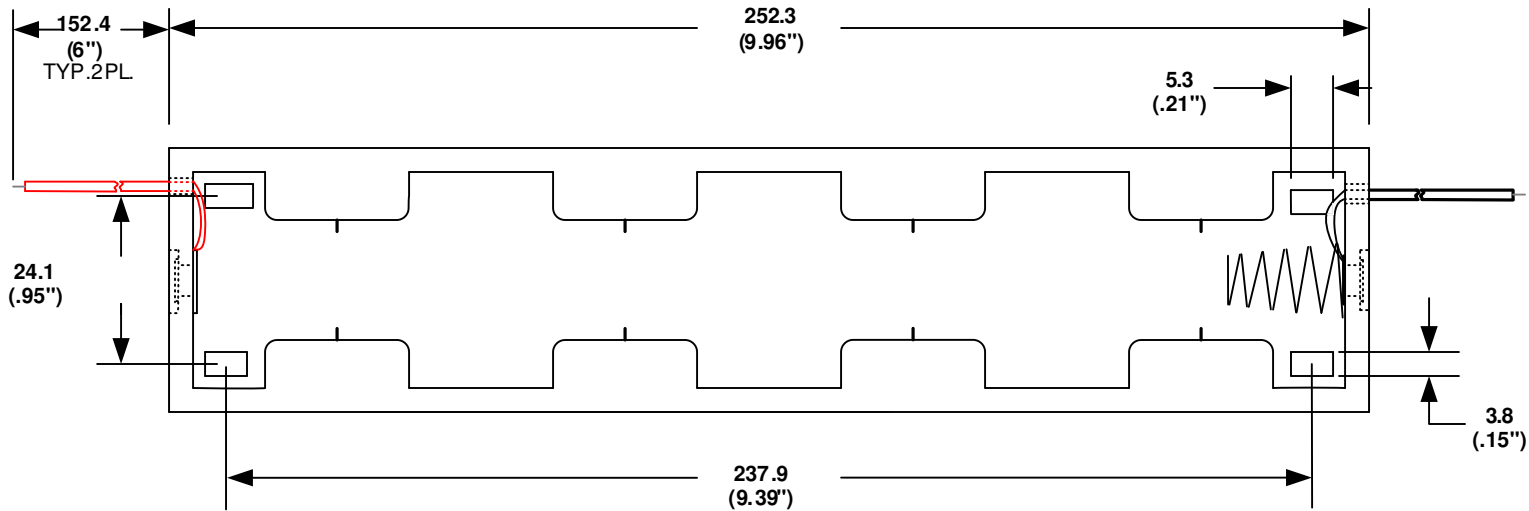

ORDERING CODE

BH14D

SOLDER LUGS = L
WIRE LEADS = W

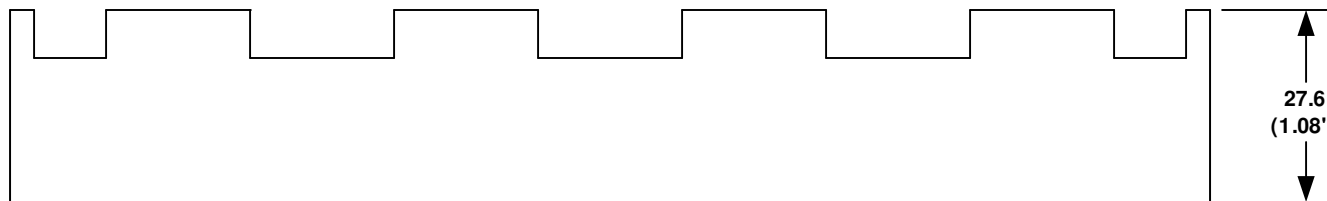


SOLDER LUGS SHOWN ABOVE

SPECIFICATIONS :

Plastic material - Polypropylene, Black
 Flammability rating-UL94 HB, UL file no. E216959
 Temperature Range: -10°C to +100 °C
 Springs - nickel plated spring steel
 Rivets - Brass, nickel plated
 9 Volts Snaps - Brass, nickel plated
 Contact resistance: Under 50mΩ for +/- contacts per EIA-540J000
 ROHS COMPLIANT

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)	 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735		
DECIMAL		SCALE	DRAWN BY S.C.
+ .5 (.020") - .5 (.020")			APPROVED BY
FRACTIONAL	TITLE		
+ .8 (.030") - .8 (.030")	<p align="center">FOUR "D" CELL HOLDER</p>		
ANGULAR	DATE	DRAWING NUMBER	
+ 3° - 3°	10/12/2007	<p align="center">BH14DW</p>	