



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|-----------------------------|------|------|-----|
| 04/12/13 | A | UPDATED TO ROHS 2 COMPLIANT | T.B. | B.S. | |
| | | | | | |
| | | | | | |
| | | | | | |

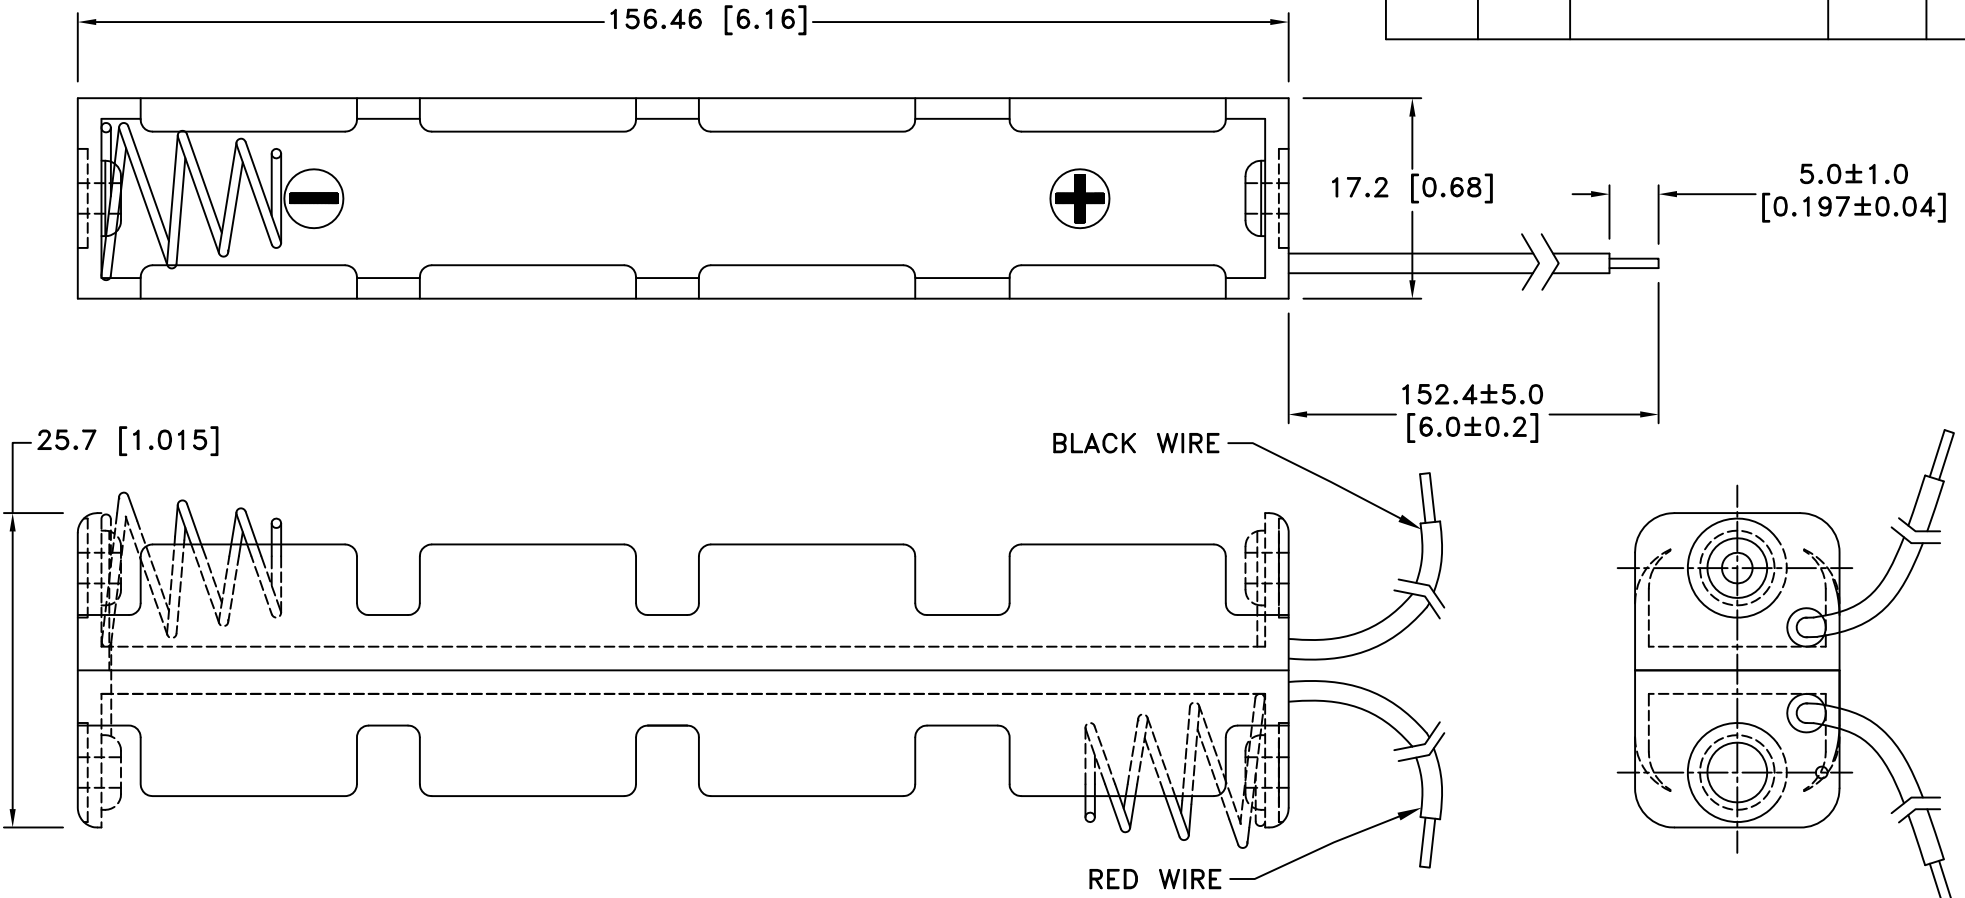

NOTES:
 Plastic material - Polypropylene
 Flammability Rating -UL94-HB, UL File NO. E216959
 Temperature Range: -10°C to +100°C
 Wires: 26 AWG, UL 1007, CSA, TR-64, 300V, 80°C
 Springs - Nickel Plated Spring Steel
 Rivets - Brass, Nickel Plated
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER
 EIA-540J000
 ROHS 2 COMPLIANT

| | | | |
|--------------------------------|---|---------------------------|------------------|
| Tolerance (Except as noted) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | Scale | Drawn By B.S. |
| | | | Approved By T.B. |
| decimal ±.5 (.020) | Title SIX "AA" CELL HOLDER | Date 04/12/13 | |
| Fractional ± .8 (.030) | | Drawing Number BH16AAW | |
| Angular ± 3° | | | |