



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
08/12/11	B	ADDED LOCATION OF PEGS	T.B.	B.S.	
10/07/11	C	ADDED UL FLAME RATING TEMP. RANGE WAS +315°C	T.B.	B.S.	

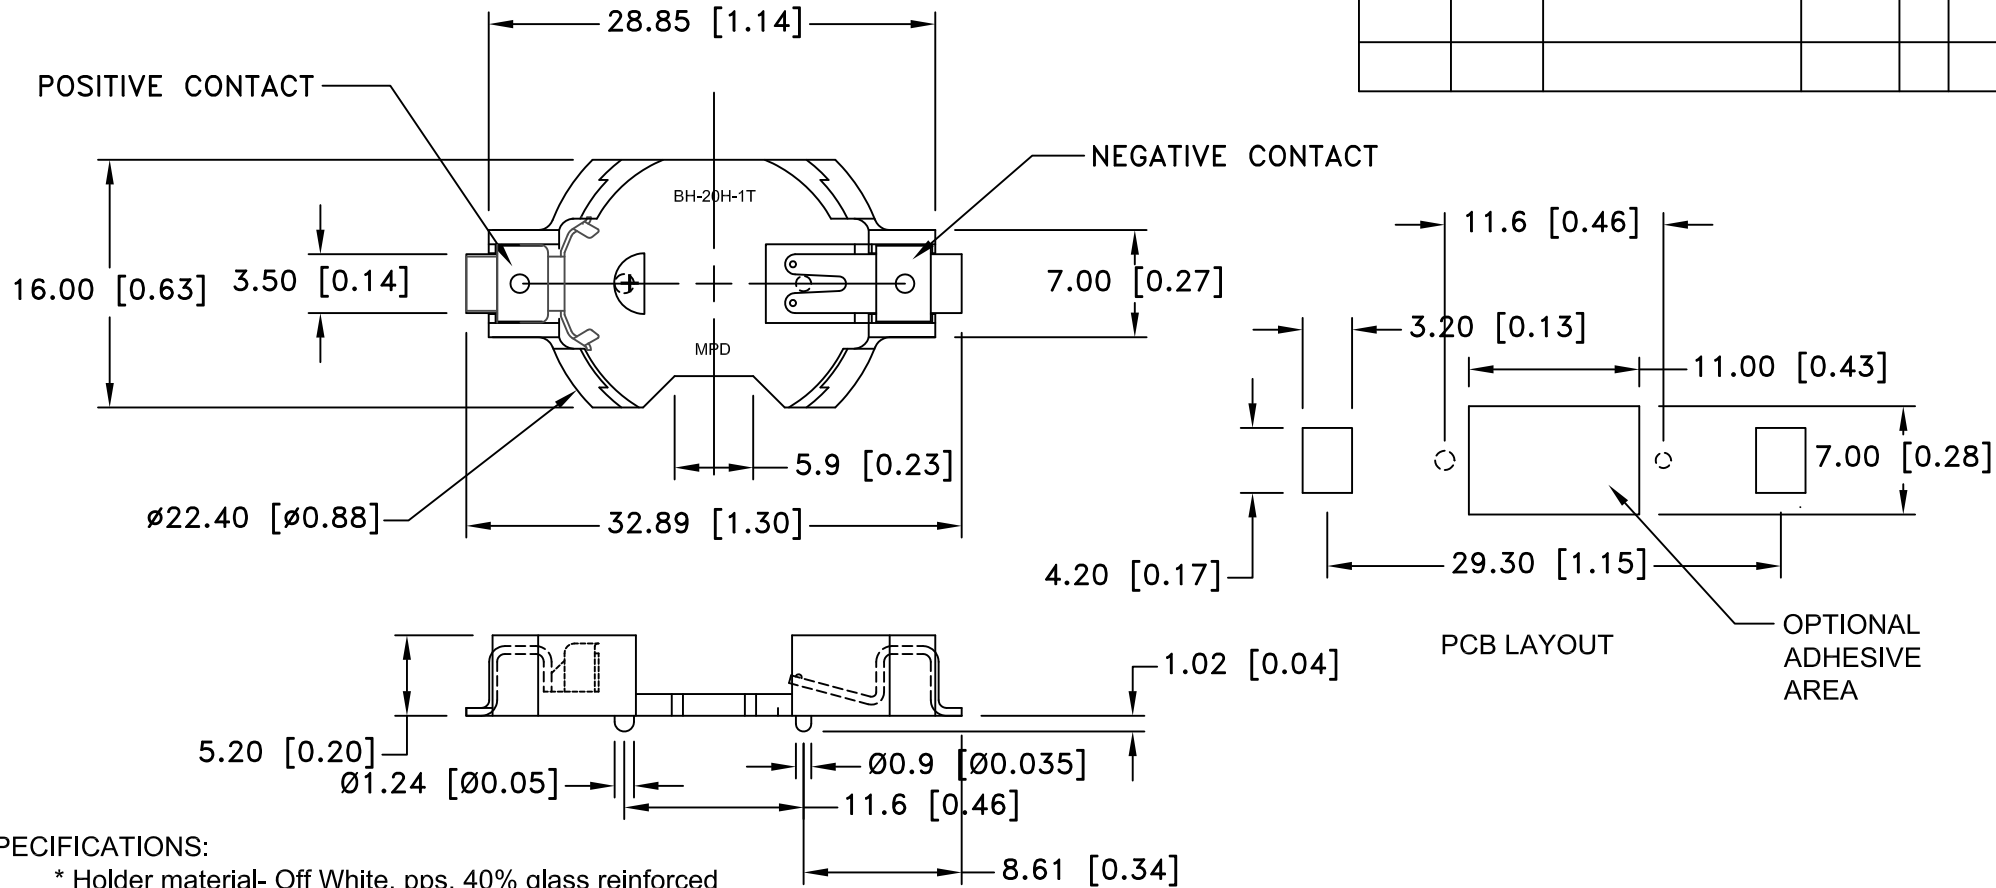

**SPECIFICATIONS:**

- \* Holder material- Off White, pps, 40% glass reinforced  
UL File No. E107854, UL 94V-0
- \* Contacts : 0.020" thick STAINLESS STEEL 301, spring temper,  
Nickel Plated
- \* Temperature range: -40°C to +260°C
- \* Vibration Test: 10-50-10 Hz swept in 60 seconds  
X,Y,Z direction: 1 hour each direction
- \* Result: No dislodgement of the cell or damage  
No discontinuity over 10 micro-seconds
- \* Shock Test: Half sine wave acceleration 150G. 6 micro-seconds  
3 shock pulses each direction per axis, total of 18 pulses
- \* Result: No evidence of physical damage+
- \* Good Resistance to chemicals
- \* ROHS Compliant

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal $\pm .5$ (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional $\pm .8$ (.030)	Title SMD CR2032 BATTERY HOLDER		
Angular $\pm 3^\circ$	Date 10/07/11	Drawing Number BH-20H-1T	