
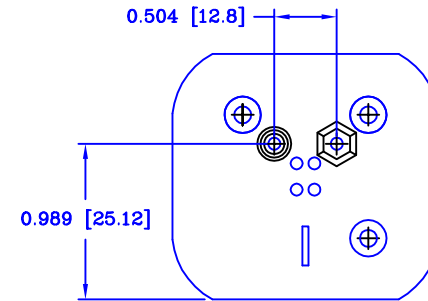
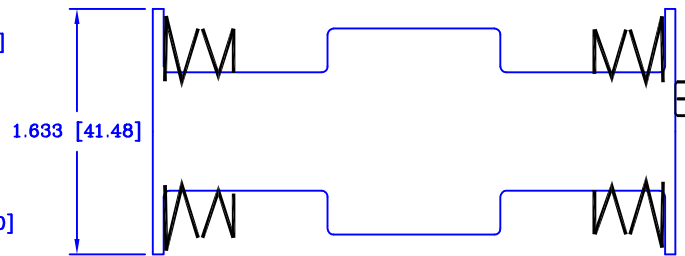
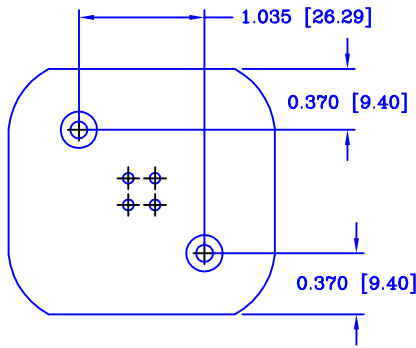


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
5/05/07	A	ADDED "ROHS COMPLIANT" UPDATED MATERIAL SPEC.	T.B.	B.S.	

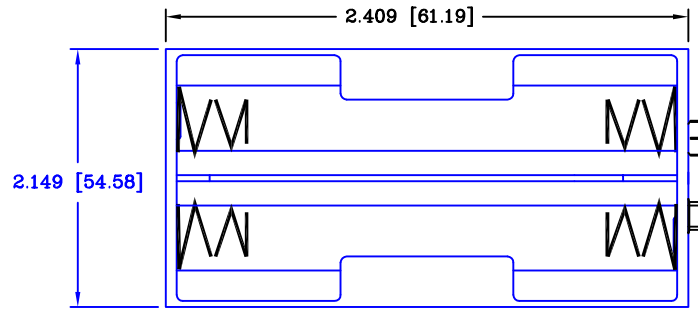


ORDERING CODE BH22C 

### SPECIFICATIONS

Plastic material - Polypropylene, PP-1040  
 Flammability Rating -UL94-HB, UL File NO. E216959  
 Temperature Range: -10°C to +100°C  
 Springs - Nickel Plated Spring Steel  
 Wire - 26 AWG, UL1007, CSA  
 Rivets - Brass, Nickel Plated  
 9Volt Snaps - Brass, Nickel Plated  
 Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J00  
 ROHS COMPLIANT

L- Solder Lugs  
 W-(6") Wire Leads  
 SF-9Volt type snaps  
 B- Bump plates

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By T.S.
		1=1	Approved By T.B.
decimal ±.020 (.5)	Title FOUR "C" CELL HOLDER		
Fractional ± .030 (.8)	Date 5/05/07	Drawing Number BH22CSF	
Angular ± 3°			