
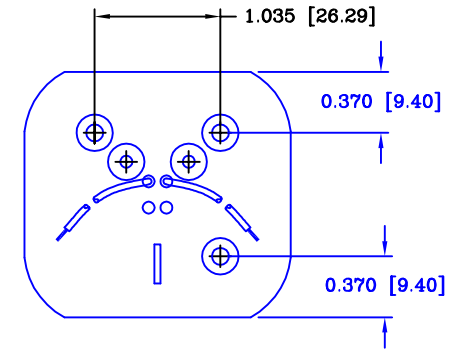
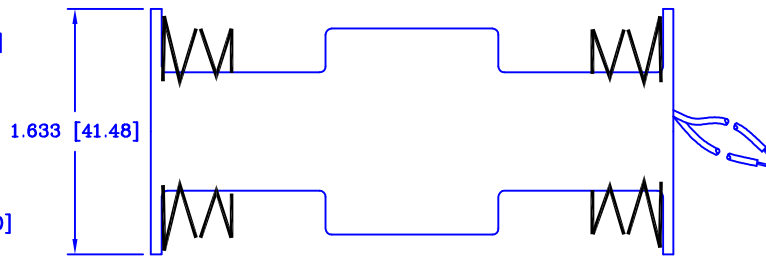
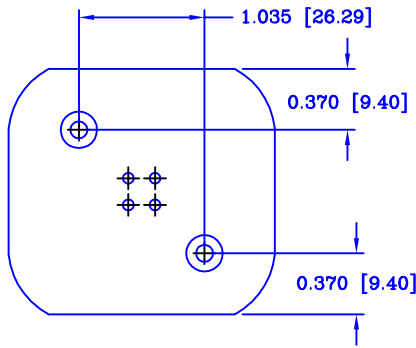


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
3/24/07	A	ADDED "ROHS COMPLIANT" UPDATED MATERIAL SPEC.	T.B.	B.S.	
5/05/07	B	UPDATED TOLERANCE AND TITLE BLOCK	T.B.	B.S.	

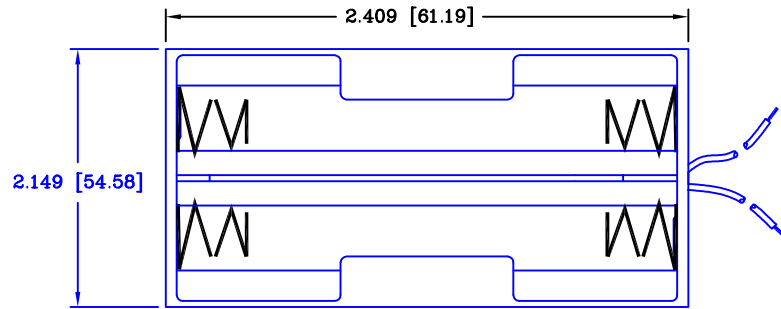


ORDERING CODE BH22C 

SPECIFICATIONS

Plastic material - Polypropylene, PP-1040
 Flammability Rating -UL94-HB, UL File NO. E216959
 Temperature Range: -10°C to +100°C
 Springs - Nickel Plated Spring Steel
 Wire - 26 AWG, UL1007, CSA
 Rivets - Brass, Nickel Plated
 9Volt Snaps - Brass, Nickel Plated
 Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J00
 ROHS COMPLIANT

L- Solder Lugs
 W-(6") Wire Leads
 SF-9Volt type snaps
 B- Bump plates

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.020 (.5)	Scale 1=1	Drawn By T.S. Approved By T.B.	
Fractional ± .030 (.8)	Title FOUR "C" CELL HOLDER		
Angular ± 3°	Date 5/05/07	Drawing Number BH22CW	