
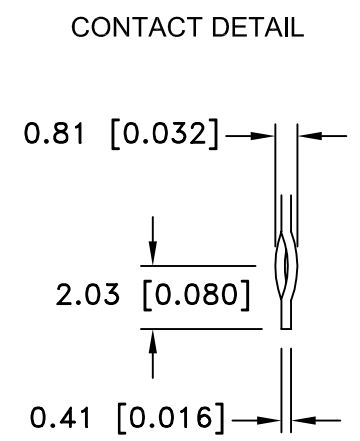
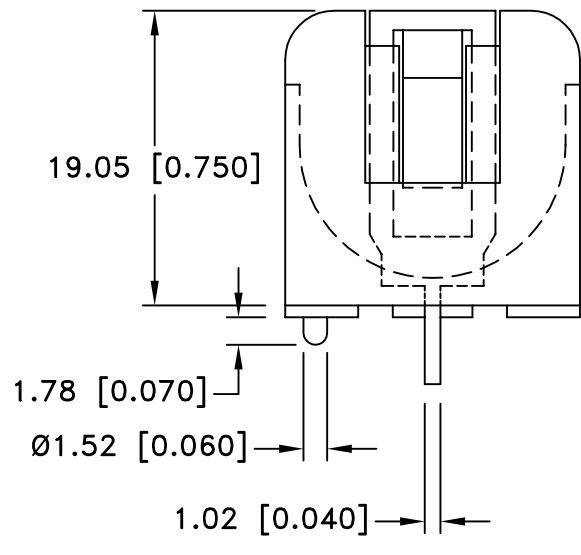


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/29/05	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
11/19/05	B	UPDATED TITLE	T.B.	B.S.	
1/14/06	C	DIM. 42.04 WAS 41.28	T.B.	B.S.	

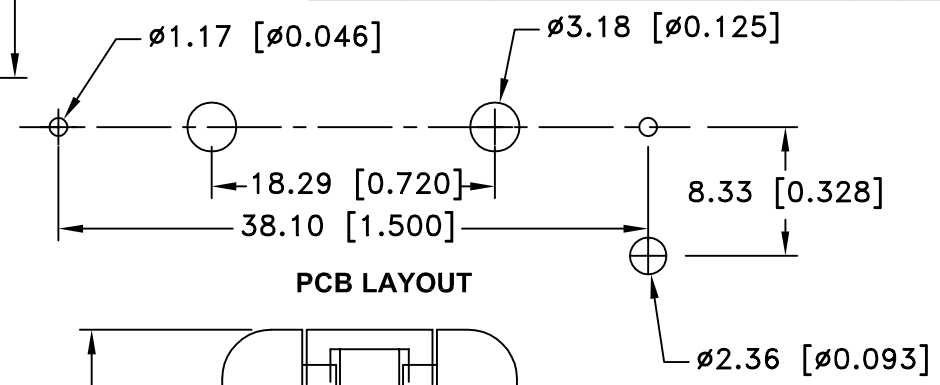


SPECIFICATIONS:

- Holder Material: Black PBT
- Flamability Rating: UL94V-0, FILE #E53829
- Contacts: 301 Spring temper stainless steel, nickel plated overall
- Dielectric strength: 560 Volts/mil at 25°C for 5 Sec.
- Temperature Range: -55°C to +180°C
- Vibration Test: 10-50-10 Hz swept in 60 seconds
 - X,Y,Z direction: 1 hour each direction, No dislodgement of the cell or damage, No discontinuity over 10 micro-seconds
- Shock Test: Half sine wave acceleration 150g. 6 micro-seconds, 1 shock pulses each direction per axis, total of 6 pulses, No evidence of physical damage

NOTES:

- Eyelet Stimpson style #A1883 0.110" OD x 0.190" Flange
- Flange Recess 0.203" x 0.090" Deep
- Accepts Standard 2-56 Machine Screws
- Accessories: BI-UM-3-4, Insulator
- ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title BR/CR 2/3A BATTERY HOLDER, PCB MOUNTING		
Fractional ± .8 (.030)		Date 1/14/06	Drawing Number BH2/3A-3
Angular ± 3°			