


| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|---------------------------|------|------|-----|
| 10/22/05 | A | ADDED "ROHS COMPLIANT" | T.B. | B.S. | |
| 3/18/06 | B | UPDATED MATERIAL SPEC. | T.B. | B.S. | |
| 5/06/06 | C | ADDED CONTACT RESI. INFO. | T.B. | B.S. | |

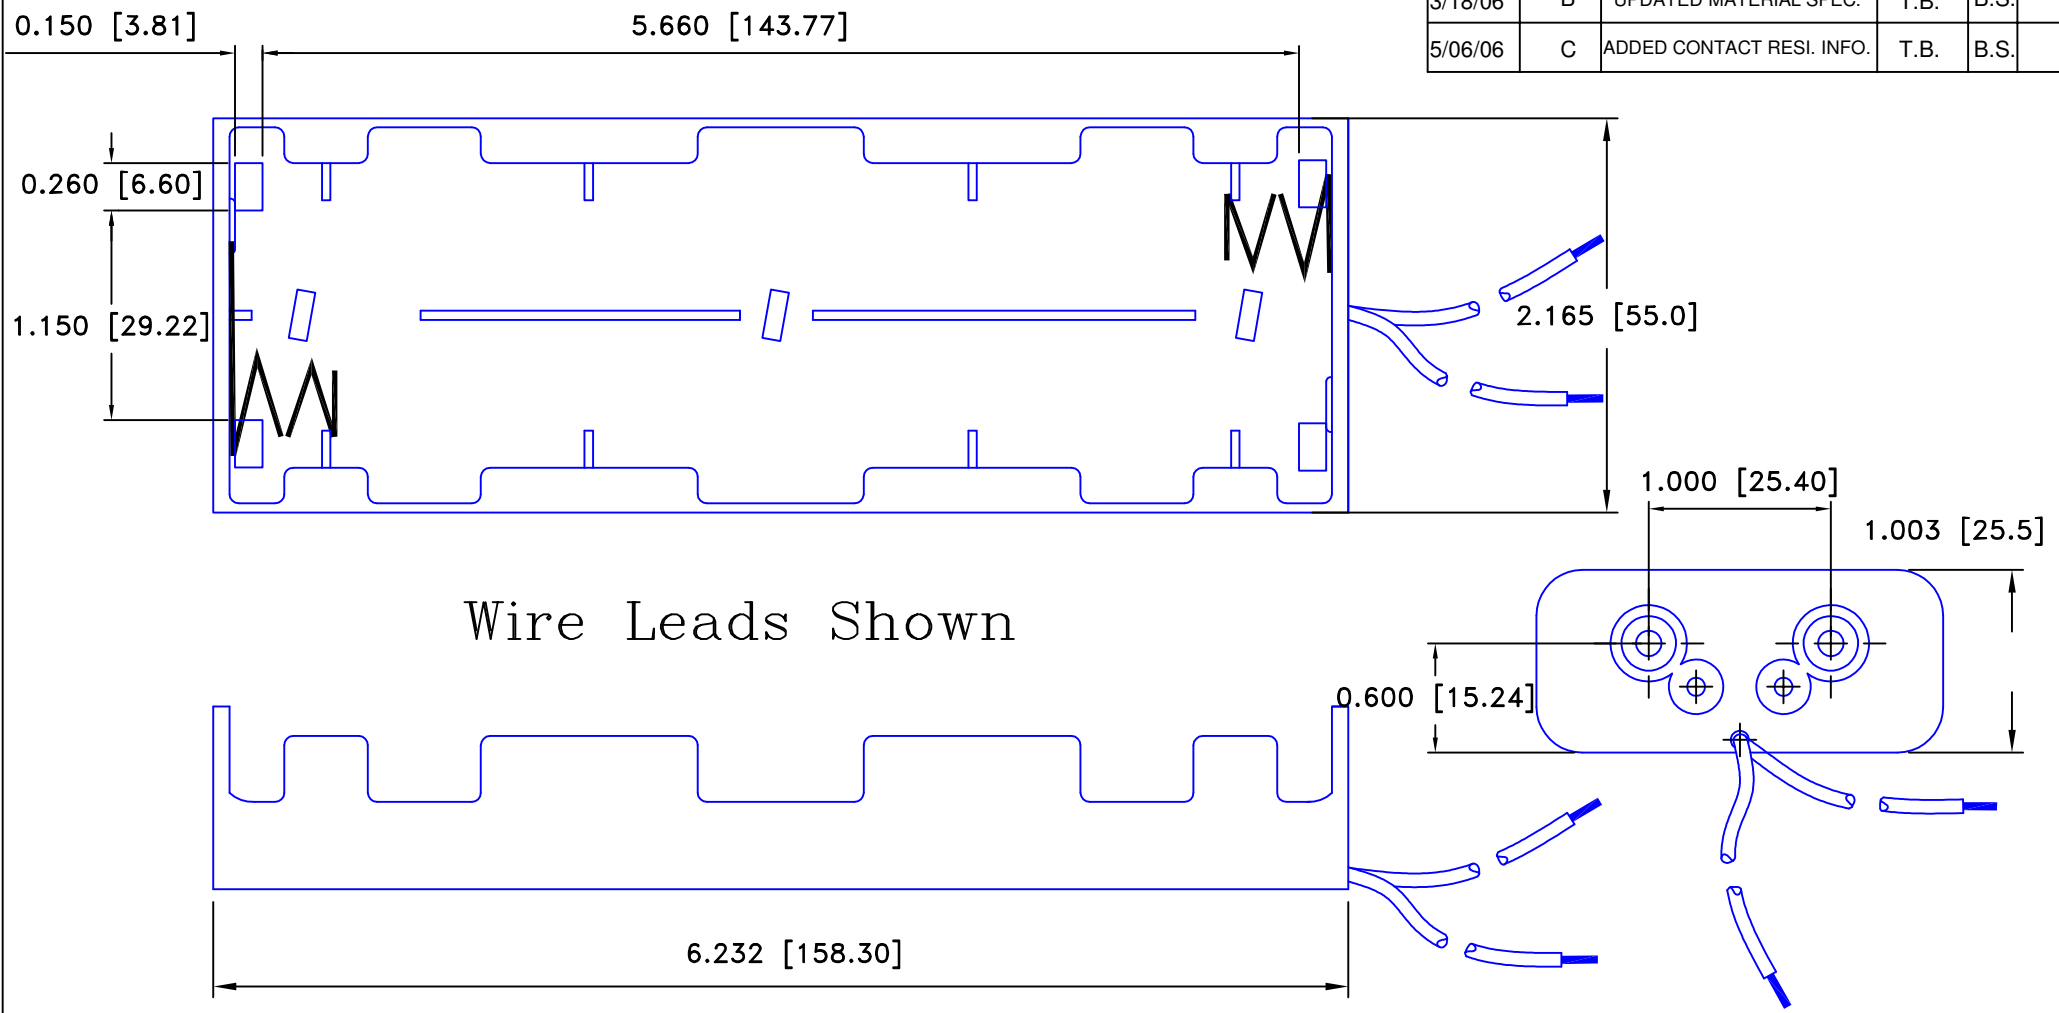


Wire Leads Shown

ORDERING CODE BH26C

SPECIFICATIONS

Plastic material - Polypropylene
 Flammability Rating -UL94-HB, UL File NO. E216959
 Temperature Range: -10°C to +100°C
 Springs - Nickel Plated Spring Steel
 Wire - 26 AWG, UL1007, CSA
 Rivets - Brass, Nickel Plated
 9Volt Snaps - Brass, Nickel Plated
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/-
 CONTACTS PER EIA-540J000
 ROHS COMPLIANT

L- Solder Lugs
 W- (6") Wire Leads
 SF- 9Volt type snaps
 B- Bump plates

| | | | |
|--------------------------------|---|-----------------------------------|--|
| Tolerance (Except as noted) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | | |
| decimal ±.5 (.020) | Scale 1.5=1 | Drawn By B.S. Approved By T.B. | |
| Fractional ± .8 (.030) | Title SIX "C" CELL HOLDER | | |
| Angular ± 3° | Date 5/06/06 | Drawing Number BH26CW | |