



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
03/29/13	Α	UPDATED TO "ROHS 2 COMPLIANT"	T.B.	B.S.	

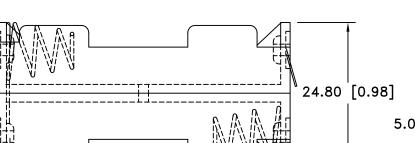

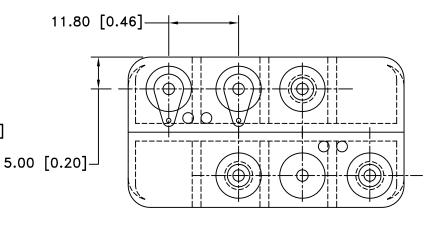

NOTES:

1 MATERIAL:

HOUSING: BLACK POLYPROPYLENE

FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959

TEMPERATURE RANGE: -10°C to +100°C

RIVETS: BRASS, NICKLE PLTD.

SPRING: SPRING STEEL, NICKLE PLTD.

CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER

EIA-540J000

ROHS 2 COMPLIANT

Tolerance (Except as noted)	MPD Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735					
decimal			Scale	Drawn By B.S.		
±.5 (.020)				Approved By T.B.		
Fractional ± .8 (.030)	Title EIGHT "AAA" CELL HOLDER					
Angular	Date	Drawing Number				
± 3°	03/29/13	BH28AAAL				