
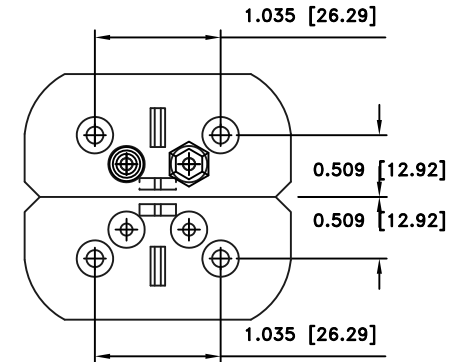
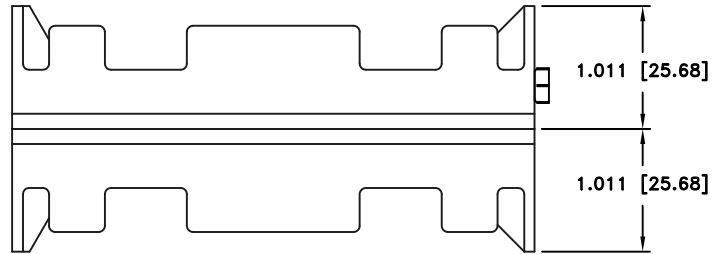




Date	SYM	REVISION RECORD	AUTH	DR.	CK.
03/08/13	A	Updated to ROHS 2 compliant	T.B.	B.S.	

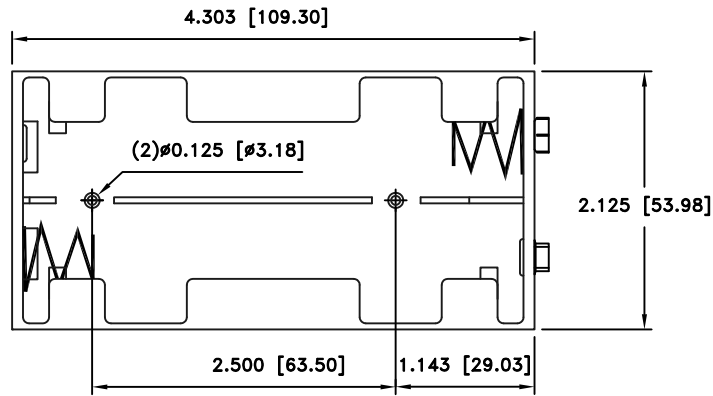

**SPECIFICATION:**

**1. MATERIAL:**

HOUSING : BLACK POLYPROPYLENE  
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959  
 TEMPERATURE RANGE: -10°C to +100°C  
 RIVETS: BRASS, NICKLE PLTD.  
 9 VOLT SNAPS: BRASS, NICKEL PLATED  
 SPRING: SPRING STEEL, NICKLE PLTD.  
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000  
 ROHS 2 COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By T.S.
		1=1	Approved By T.B.
decimal ±.5 (.020)	Title EIGHT "C" CELL HOLDER		
Fractional ± .8 (.030)	Date 03/08/13	Drawing Number BH28CSF	
Angular ± 3°			