
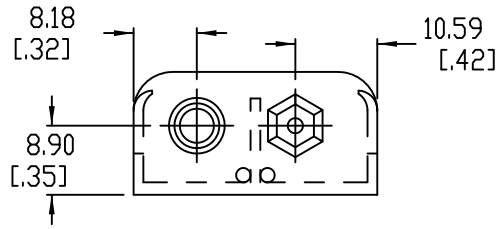
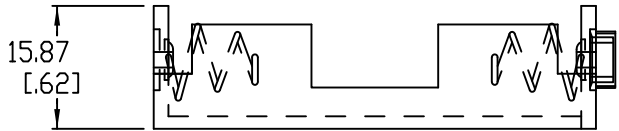


| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|--------------------------------|------|------|-----|
| 12/26/03 | A | Changed Material Specification | T.B. | B.S. | |
| 04/26/13 | B | Updated to ROHS 2 Compliant | T.B. | B.S. | |
| | | | | | |
| | | | | | |
| | | | | | |

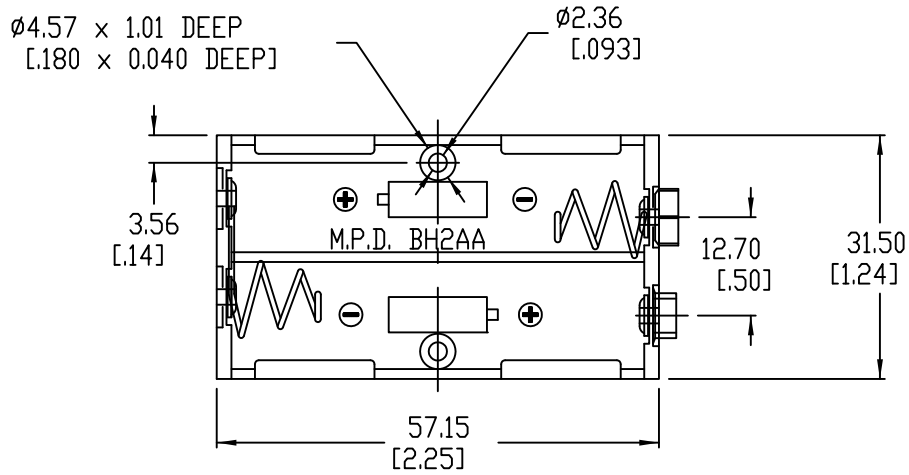


MOUNTING INSTRUCTION:

USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

NOTES:

- 1. MATERIAL:
 - HOUSING : IMPACT RESISTANCE NYLON 6, BLACK, UL94V-0, UL FILE NO. E48285
 - RIVETS: BRASS, NICKLE PLATED.
 - SPRING: SPRING STEEL, NICKLE PLATED.
 - TEMPERATURE RANGE: -40°C TO +140°C
 - RESISTANT TO SOLVENTS, COMMON OILS AND REFRIGERANTS
 - ROHS 2 COMPLIANT

| | | | |
|--------------------|---|------------------|---------------|
| Tolerance (Inches) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | | |
| Decimal | | Scale | Drawn By B.S. |
| ±.5 (.020) | | Approved By T.B. | |
| Fractional | Title | | |
| ± .8 (.030) | 2AA BATTERY HOLDER WITH SNAP FASTENERS | | |
| Angular | Date | Drawing Number | |
| ± 3° | 04/26/13 | BH2AA-SF | |