Date	SYM	REVISION RECORD	AUTH	DR.	CK.
11/15/13	A	REDRAWN IN AUTOCAD UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

NOTES:

1 MATERIAL:

HOUSING: BLACK POLYPROPYLENE

FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959

TEMPERATURE RANGE: -10°C to +100°C


RIVETS: BRASS, NICKLE PLATED.

SPRING: SPRING STEEL, NICKLE PLATED. 9 VOLTS SNAPS: BRASS, NICKLE PLATED.

CONTACT RESISTANCE: UNDER $50m\Omega$ FOR +/- CONTACTS PER

EIA-540J000

ROHS 2 COMPLIANT.

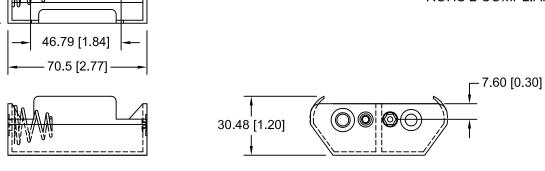

12.9 [0.507]

11.73 [0.46] --

9.08 [0.36] —

70.70 [2.78]

Tolerance (Except as noted)	MPD Memory Protection Devices, Inc						
	200 Broad Hollow Road, Farmingdale, New York 11735						
decimal			Scale	Drawn By B.S.			
±.5 (.020)				Approved By T.B.			
Fractional	Title TWO "D" CELL HOLDER WITH 9V SNAPS						
± .8 (.030)							
Angular	Date	Drawing Number					
± 3°	11/15/13	BH2DSF					