


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
11/15/03	A	3.220 WAS 3.210 Ø0.046 WAS Ø0.031	T.B.	B.S.	
11/26/05	B	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
12/02/05	C	REMOVED "SOLDER DIPIED TAILS" FROM SPEC.	T.B.	B.S.	

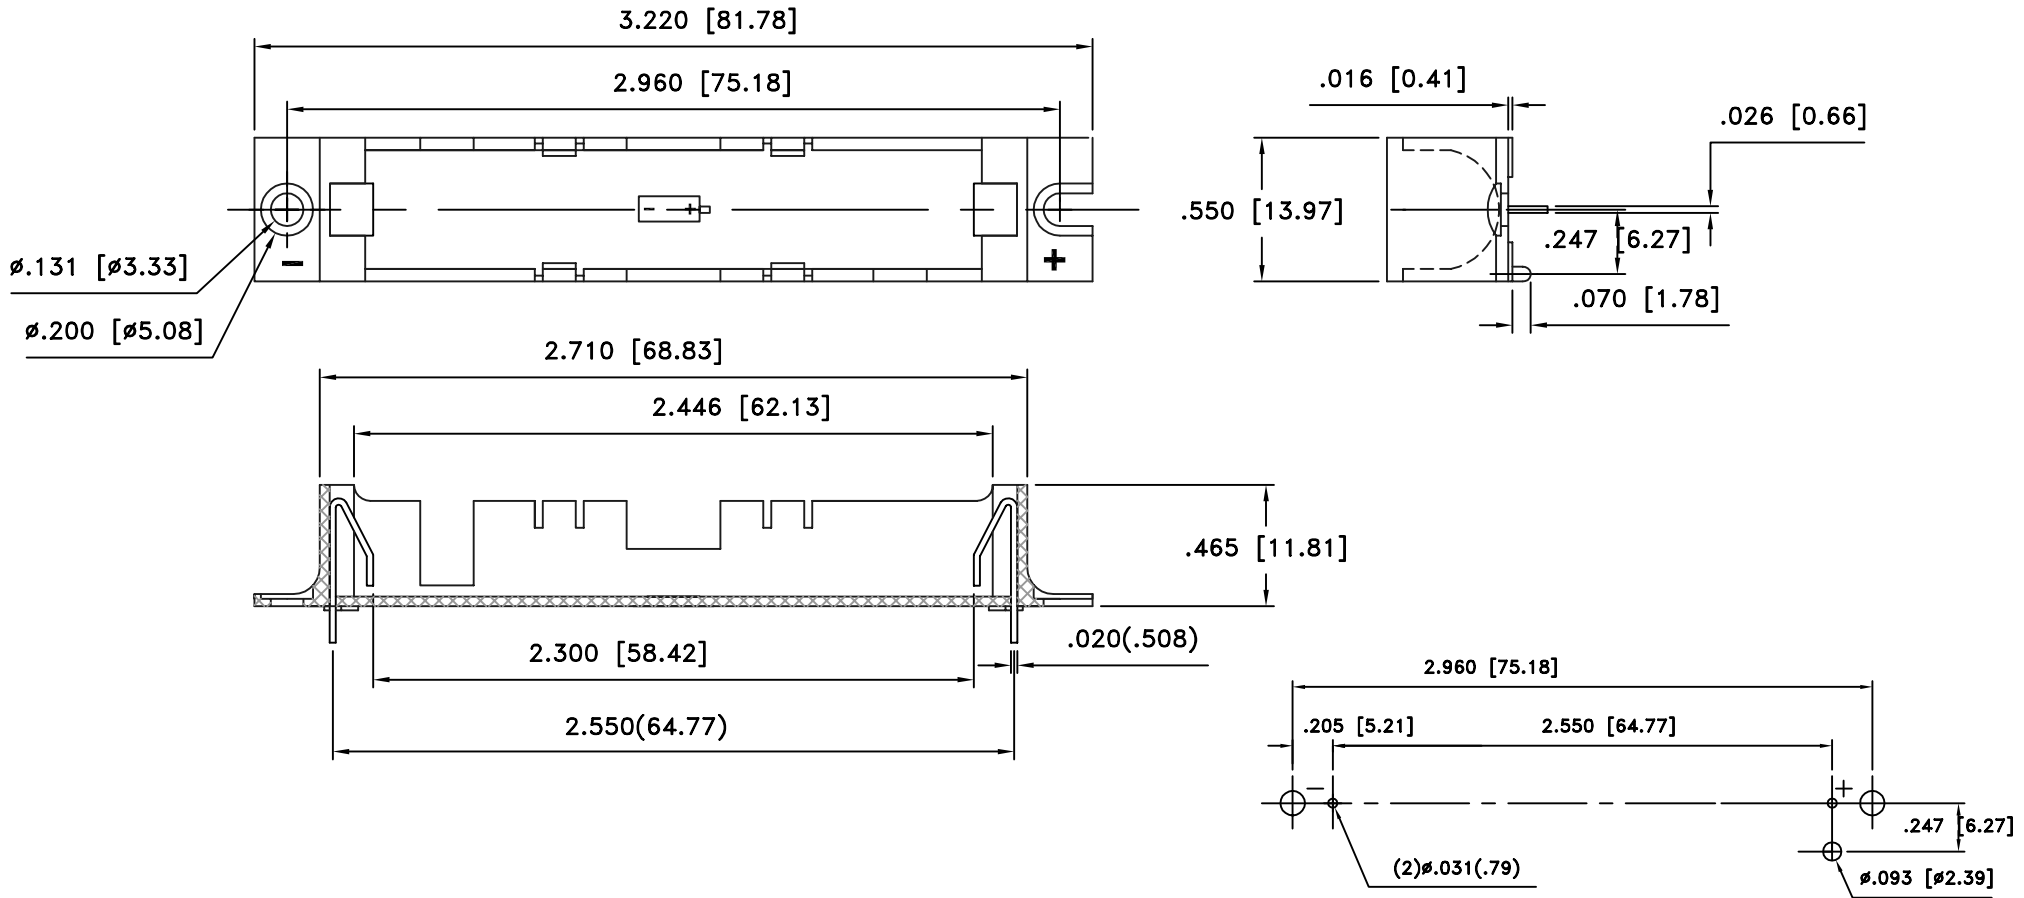

## SPECIFICATION

HOLDER: SELF-EXTINGUISHING THERMOPLASTIC POLYESTER PBT, BLACK, UL94V-0  
 CONTACTS: 301 - 304 SPRING TEMPER STAINLESS STEEL, NICKEL PLATED,

FLAMMABILITY RATING, 94V-0, FILE NO. E88499(M)


DIELECTRIC STRENGTH: 560V/ MIL AT 25°C FOR 5 SEC.

TEMPERATURE RANGE: -55°C TO +180°C

RESISTANCE TO SOLVENTS: Xylene; Ethyl acetate; Butyl, Methyl & propyl alcohol;  
 Refrigerants; Heptane; Toluene.

ROHS COMPLIANT

## PCB LAYOUT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By T.S.
decimal ±.5 (.020)		2=1	Approved By T.B.
Fractional ± .8 (.030)	Title BH-2N LITHIUM BATTERY HOLDER		
Angular ± 3°	Date 12/02/05	Drawing Number BH-2N	