


(6") WIRE LEADS SHOWN ABOVE

DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
7/14/07	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	

ORDERING CODE BH36D


SOLDER LUGS	= L
(6") WIRE LEADS	= W
9VOLT TYPE SNAPS	= SF
BUMP PLATES	= B

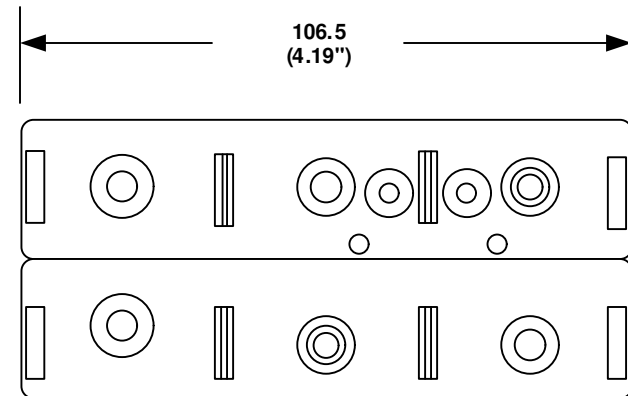

**SPECIFICATIONS:**

Plastic material - Polypropylene, Black  
 Flammability rating-UL94 HB, UL file no. E216959  
 Temperature Range: -10°C to +100°C  
 Springs - nickel plated spring steel  
 Rivets - Brass, nickel plated  
 9 Volts Snaps - Brass, nickel plated  
 Contact resistance: Under 50mΩ for +/- contacts per EIA-540J000  
 ROHS COMPLIANT

**Note:** Dimensions in mm. ( inches )

TOLERANCES (EXCEPT AS NOTED)		 <b>Memory Protection Devices, Inc.</b> 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL	+ .5 (.020") - .5 (.020")	SCALE	DRAWN BY S.C.
FRACTIONAL		APPROVED BY	
ANGULAR	DATE	TITLE	
+ 3° - 3°	7/14/2007	SIX "D" CELL HOLDER	
		DRAWING NUMBER	
		BH36DW	