

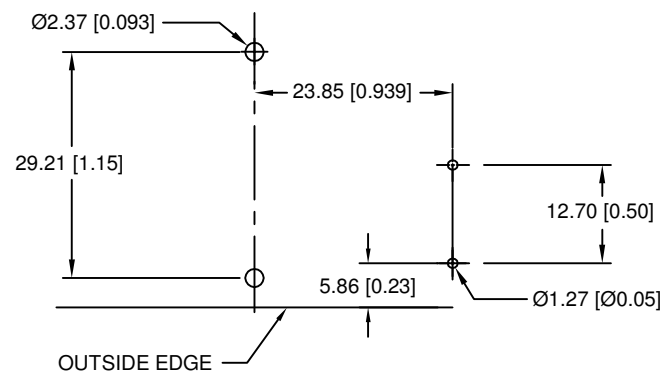
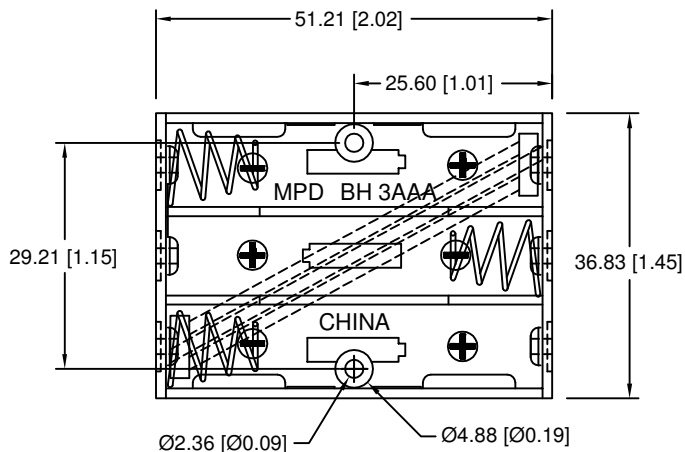


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
07/05/03	A	ADDED UL FILE #, MTL. INFO. FOR PC PIN	T.B.	B.S.	
07/25/03	B	CHANGED NOTES	T.B.	B.S.	
08/09/03	C	ADDED MOUNTING INSTRUCTION	T.B.	B.S.	
5/27/06	D	REDRAWN. ADDED "ROHS COMPLIANT". UPDATED NOTES	T.B.	B.S.	

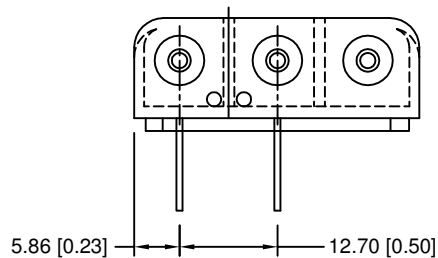

PCB LAYOUT

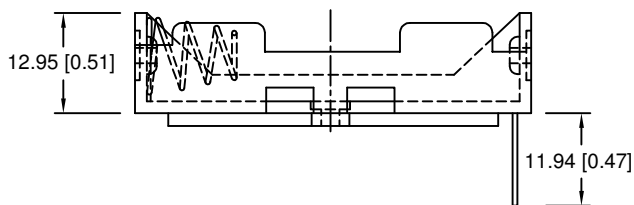


NOTES:

1. MATERIAL:

HOUSING : HIGH IMPACT NYLON 66, HALOGEN AND PHOSPHOR FREE, UL94V-0, UL FILE NO. E48285  
RIVETS: BRASS, NICKLE PLATED.  
SPRING: 302 STAINLESS STEEL, NICKLE PLATED.  
CROSSOVER WIRE: 24AWG, UL1007, CSA, TR64  
PC PINS: 302 STAINLESS STEEL, NICKEL PLATED.  
TEMPERATURE RANGE: -40°C TO +140°C  
RESISTANT TO SOLVENTS, COMMON OILS AND REFRIGERANTS  
ROHS COMPLIANT

MOUNTING INSTRUCTION:

USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT. ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5$ (.020)	Scale	Drawn By B.S.	
Fractional $\pm .8$ (.030)	Title	THREE "AAA" CELL HOLDER	
Angular $\pm 3^\circ$	Date 5/27/06	Drawing Number BH3AAAPC	
		Approved By T.B.	