
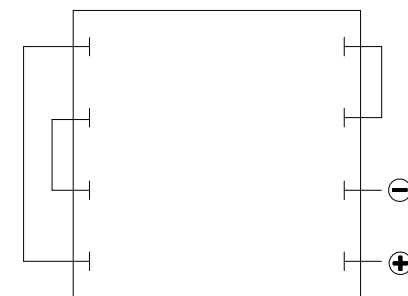
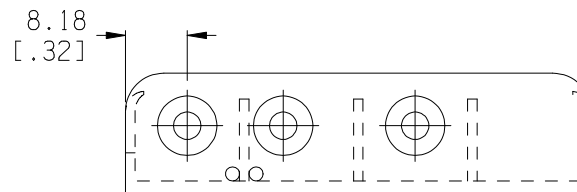
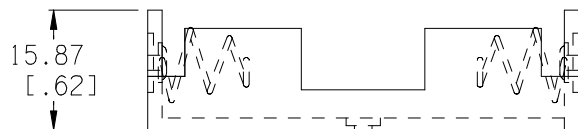


Ø4.57 x 1.01 DEEP  
[.180 x 0.040 DEEP]

Ø2.36  
[.093]

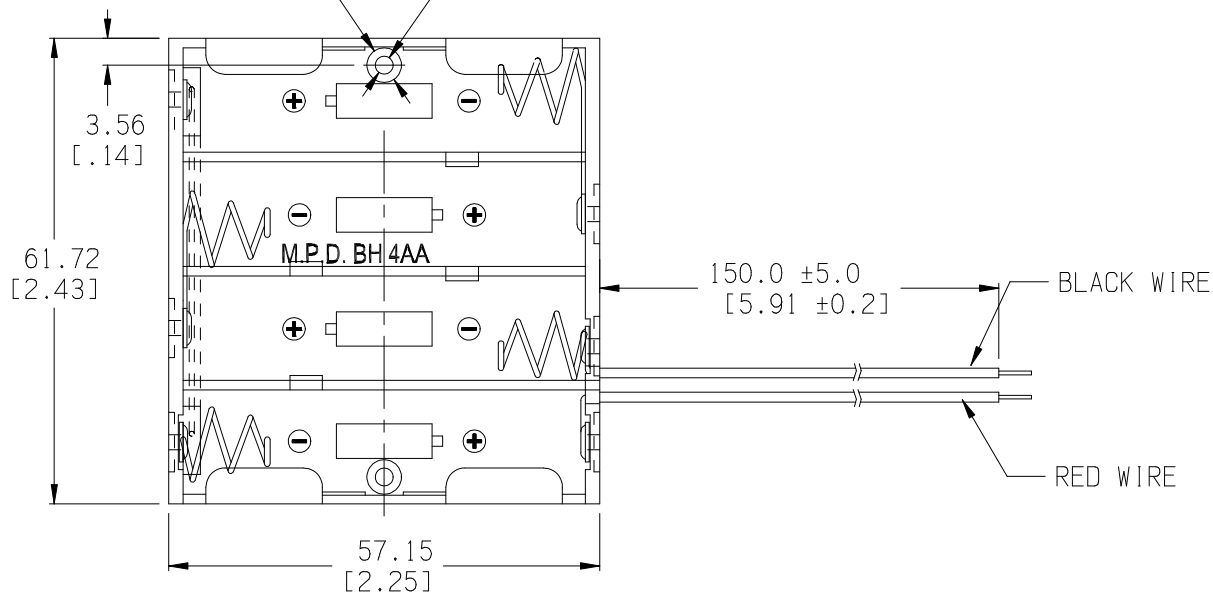

INTER CONNECTION SCHEMATIC

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
12/26/03	A	Changed Material Specification	T.B.	B.S.	
2/17/07	B	Added "ROHS COMPLIANT"	T.B.	B.S.	


MOUNTING INSTRUCTION:

USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

NOTES:

MATERIAL:

HOUSING: IMPACT RESISTANCE NYLON #6, BLACK, UL 94V-0, MATERIAL FILE #UL E 48285  
 SPRING: SPRING STEEL, NICKLE PLATED  
 CONTACTS: SPRING STEEL, NICKLE PLATED  
 EYELETS: BRASS, NICKLE PLTD.  
 WIRES: A.W.N. 80°C V W-1 PACIFIC CSA TR-64 90°C 24AWC, 300V, 1007 E41396 UL, 24 AWG PVC  
 ROHS COMPLIANT

Tolerance (Inches)	 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal ±.5 (.020)		Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title 4AA BATTERY HOLDER WITH WIRE LEADS		
Angular ± 3°	Date 2/17/07	Drawing Number BH4AA-W	