


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
03/08/13	A	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	


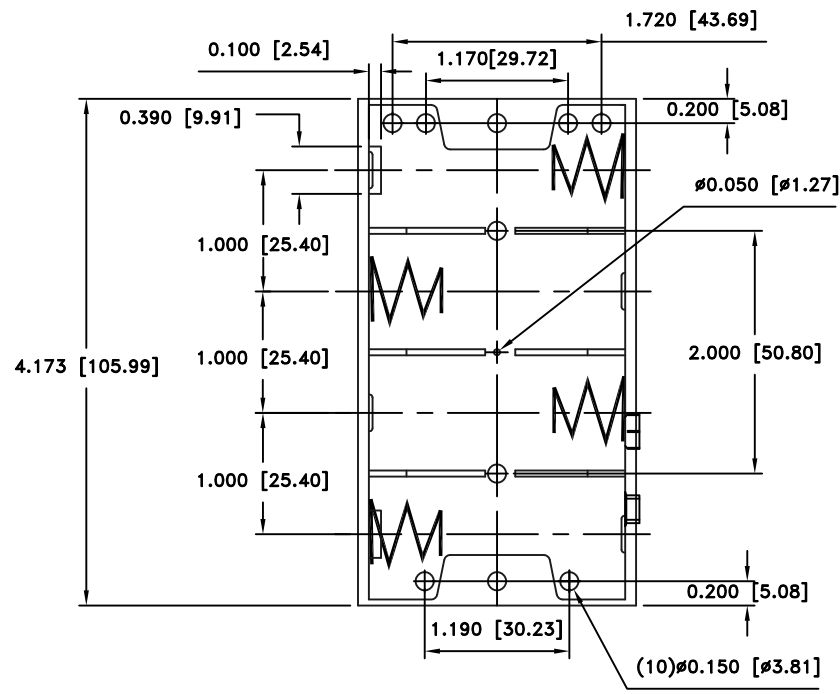



SPECIFICATION:

- 1. MATERIAL:
 - HOUSING : BLACK POLYPROPYLENE
 - FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959
 - TEMPERATURE RANGE: -10°C to +100°C
 - RIVETS: BRASS, NICKLE PLTD.
 - 9 VOLT SNAPS: BRASS, NICKEL PLATED
 - SPRING: SPRING STEEL, NICKLE PLTD.
 - CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000
 - ROHS 2 COMPLIANT

MOUNTING INSTRUCTION:

USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT. ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

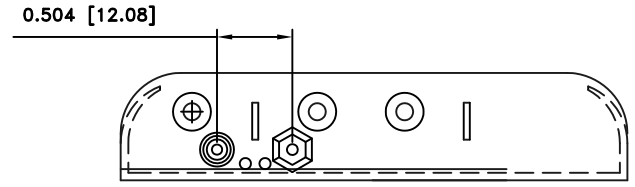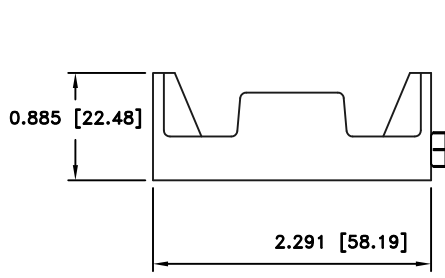

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale 1=1	Drawn By B.S.
			Approved By T.B.
decimal ±.020 (.5)	Title FOUR "C" CELL HOLDER	Date 03/08/13	
Fractional ± .030 (.8)		Drawing Number BH4CSF	
Angular ± 3°			