
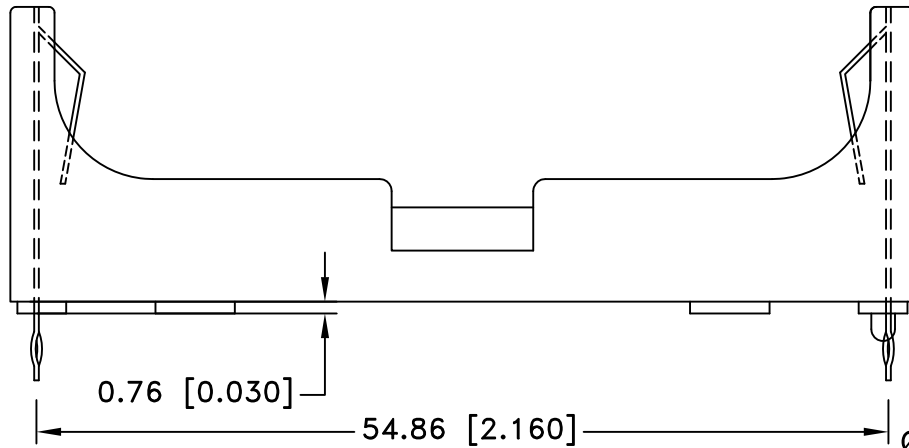


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
02/22/13	A	UPDATED TO "ROHS 2 COMPLIANT"	T.B.	B.S.	

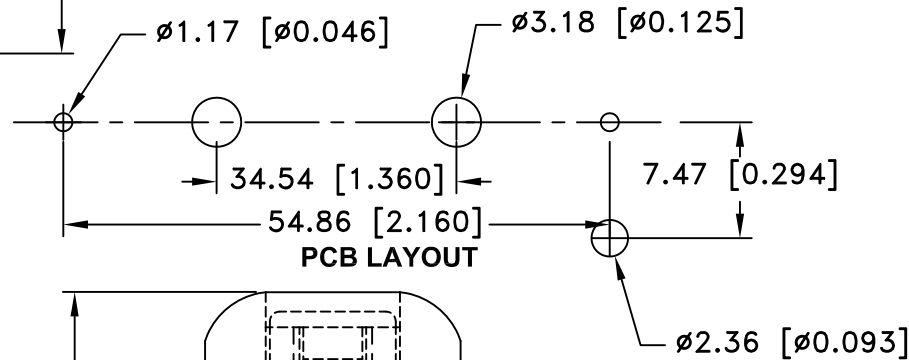


SPECIFICATIONS:

Holder Material: Black PBT, Flamability Rating: UL94V-0, FILE #E53829
 Contacts: 301 Spring temper stainless steel, Gold flash over nickel plated
 Dielectric strength: 560 Volts/mil at 25°C for 5 Sec.
 Temperature Range: -55°C to +180°C
 Vibration Test: 10-50-10 Hz swept in 60 seconds

X,Y,Z direction: 1 hour each direction, No dislodgement of the cell or damage, No discontinuity over 10 micro-seconds
 Shock Test: Half sine wave acceleration 150g, 6 micro-seconds, 1 shock pulses each direction per axis, total of 6 pulses, No evidence of physical damage

NOTES: Eyelet Stimpson style #A1883 0.110" OD x 0.190" Flange
 Flange Recess $\phi 0.203$ " x 0.090" Deep
 Accepts Standard 2-56 Machine Screws

Accessories: BI-UM-3-4, Insulator
 ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal $\pm .5$ (.020)	Title AA HOLDER WITH GOLD PCB CONTACTS		
Fractional $\pm .8$ (.030)		Date 02/22/13	Drawing Number BHAA-3-G
Angular $\pm 3^\circ$			