
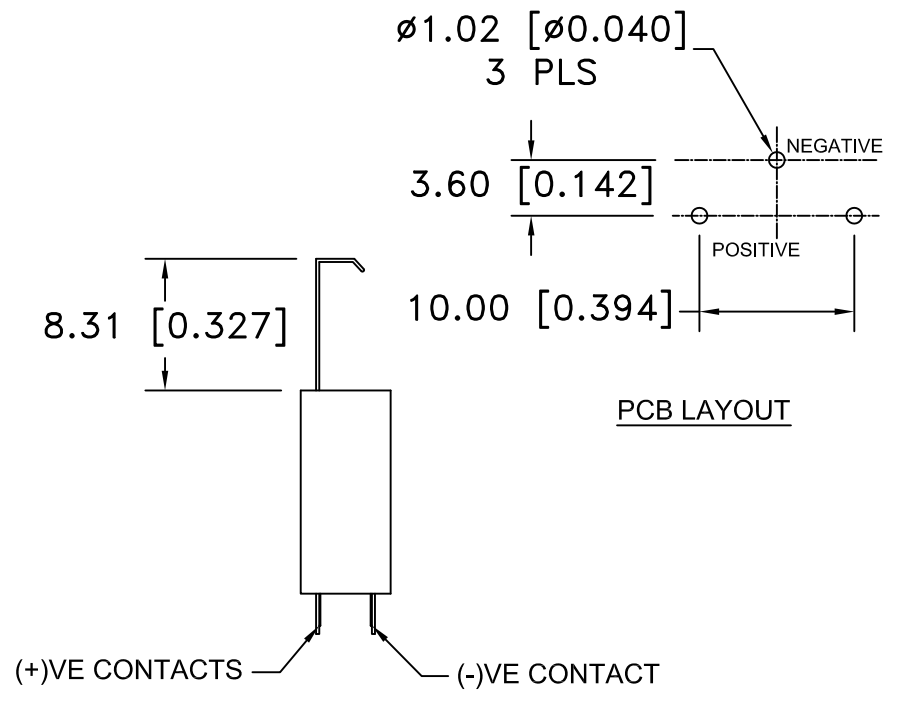
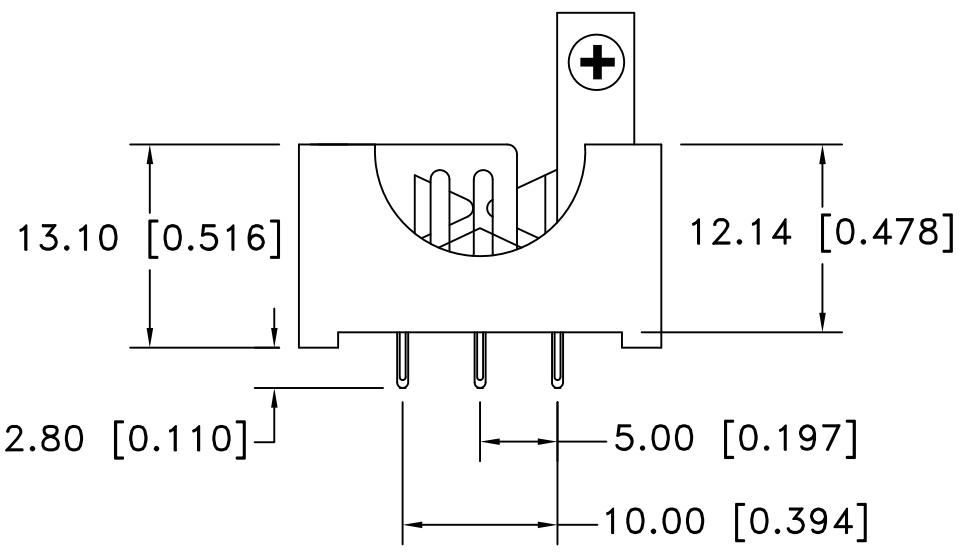



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/22/05	C	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
9/04/08	D	COLOR WAS BLUE	T.B.	B.S.	
5/13/11	E	CONTACT PLATING WAS TIN PLATING	T.B.	B.S.	
07/29/11	F	UPDATED NOTES	T.B.	B.S.	
02/28/14	G	DIM. 8.31 WAS 8.51 DIM. 2.80 WAS 2.60	T.B.	B.S.	

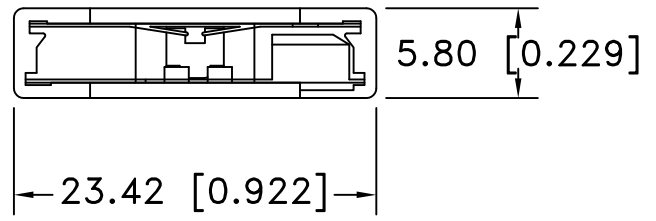

NOTES:
MATERIAL: GLASS FILLED NYLON 66, UL94V-0
COLOR BLACK, UL FILE NO. E196894
CONTACTS: PHOSPHOR BRONZE, C5191, NICKEL PLATED
ELECTRICAL :
VOLTAGE: 250V AC
CONTACT RESISTANCE: 30mΩ MAX
INSULATION RESISTANCE: 1000mΩ AT DC 500V
DIELECTRIC STRENGTH: AC 1000V PER MINUTE
TEMPERATURE RANGE: -40°C TO +200°C
ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title BR/CR/DL 2032 VERTICAL BATTERY HOLDER, 3 PINS		
Fractional ± .8 (.030)		Date 02/28/14	Drawing Number BK-5058
Angular ± 3°			