



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/22/05	B	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
8/11/07	C	UPDATED SPECIFICATIONS	T.B.	B.S.	
11/21/07	D	DIM. 5.30 WAS 5.00	T.B.	B.S.	
6/06/08	F	Temperature range was -40°C to +315°C	T.B.	B.S.	
12/07/12	G	Updated material	T.B.	B.S.	

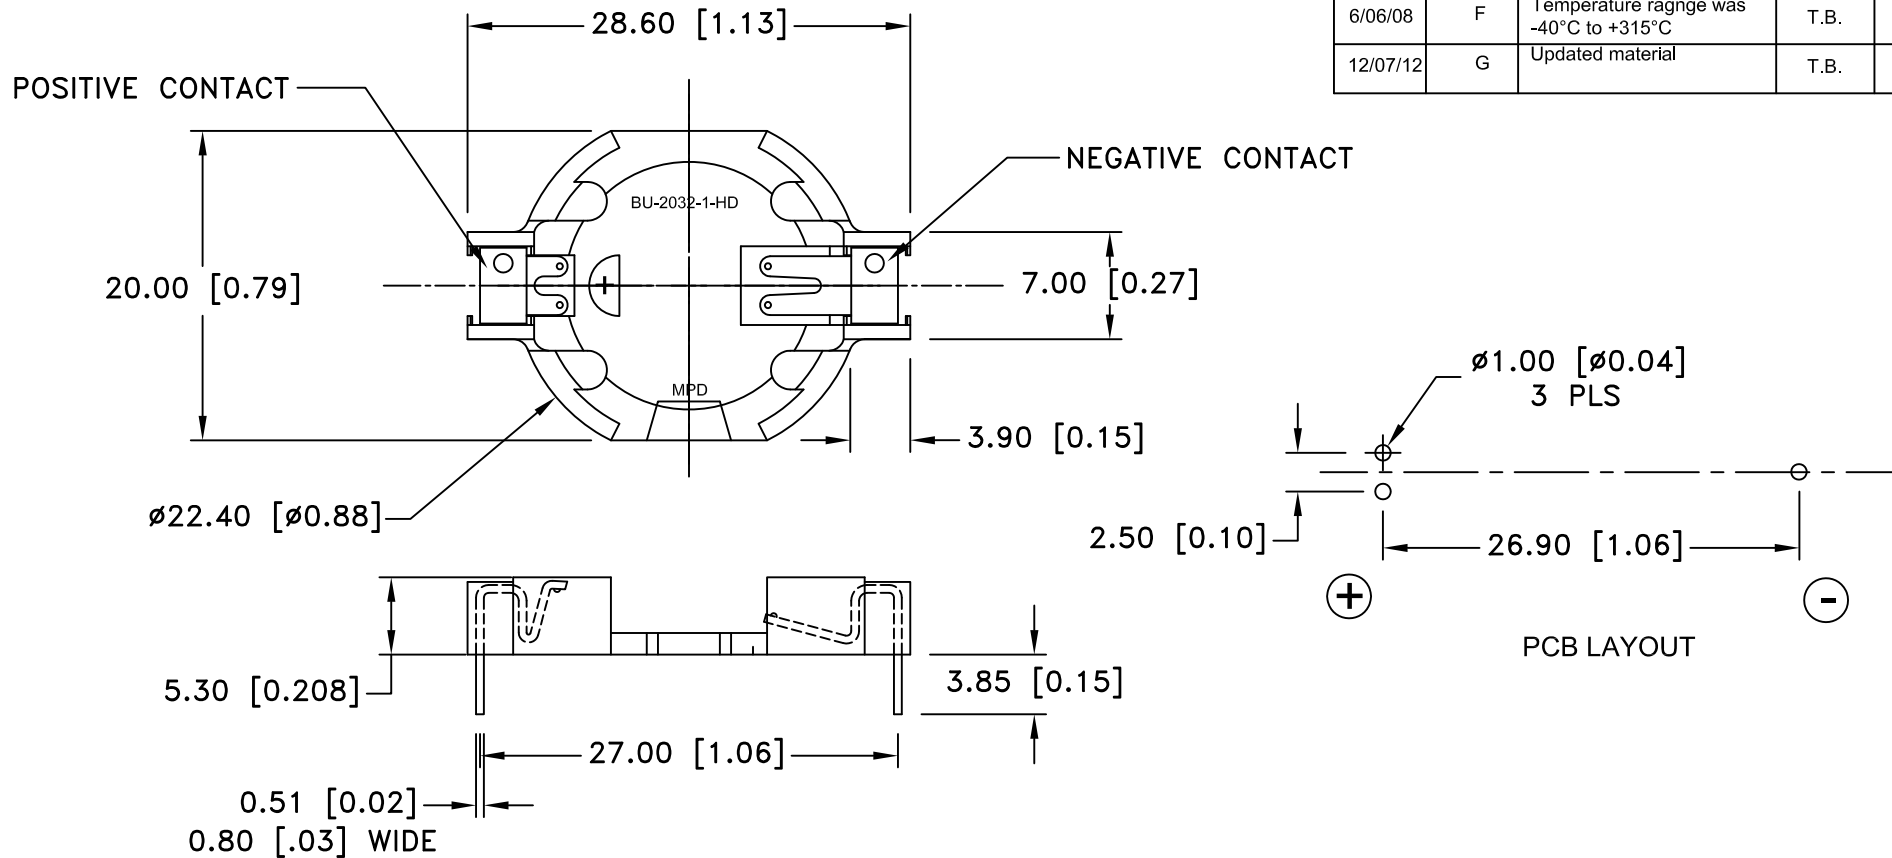

**SPECIFICATIONS:**

- \* Holder material- Black, Nylon 66, UL File No. E44716, UL94V-0
- \* Contacts : 0.020" thick PHOS-BRONZE, GOLD FLASH
- \* Temperature range: -40°C to +280°C
- \* Vibration Test: 10-50-10 Hz swept in 60 seconds  
X,Y,Z direction: 1 hour each direction
- \* Result: No dislodgement of the cell or damage  
No discontinuity over 10 micro-seconds
- \* Shock Test: Half sine wave acceleration 150G. 6 micro-seconds  
3 shock pulses each direction per axis, total of 18 pulses
- \* Result: No evidence of physical damage
- \* ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal $\pm .5$ (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional $\pm .8$ (.030)	Title HIGH GRIP BATTERY HOLDER FOR CR2032 WITH PC PINS		
Angular $\pm 3^\circ$	Date 12/07/12	Drawing Number BU2032-1-HD-G	