



Date	SYM	REVISION RECORD	AUTH	DR.	CK.





SPECIFICATION:

1. HOUSING : BLACK POLYPROPYLENE


FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959

TEMPERATURE RANGE: -10°C to +100°C

CONTACTS: NICKLE PLATED STAINLESS STEEL

ROHS COMPLIANT

Tolerance (Inches)	MPD Memory Protection Devices, Inc						
	200 Broad Hollow Road, Farmingdale, New York 11735						
Decimal			Scale	Drawn By B.S.			
±.5 (.020)				Approved By T.B.			
Fractional	Title AAA DATTEDY HELDER DEGLETYE GIRE						
± .8 (.030)	AAA BATTERY HOLDER; POSITIVE SIDE						
Angular	Date	Drawing Nu	mber				
± 3°	05/13/11	C	B-AAA-P(C-POS			

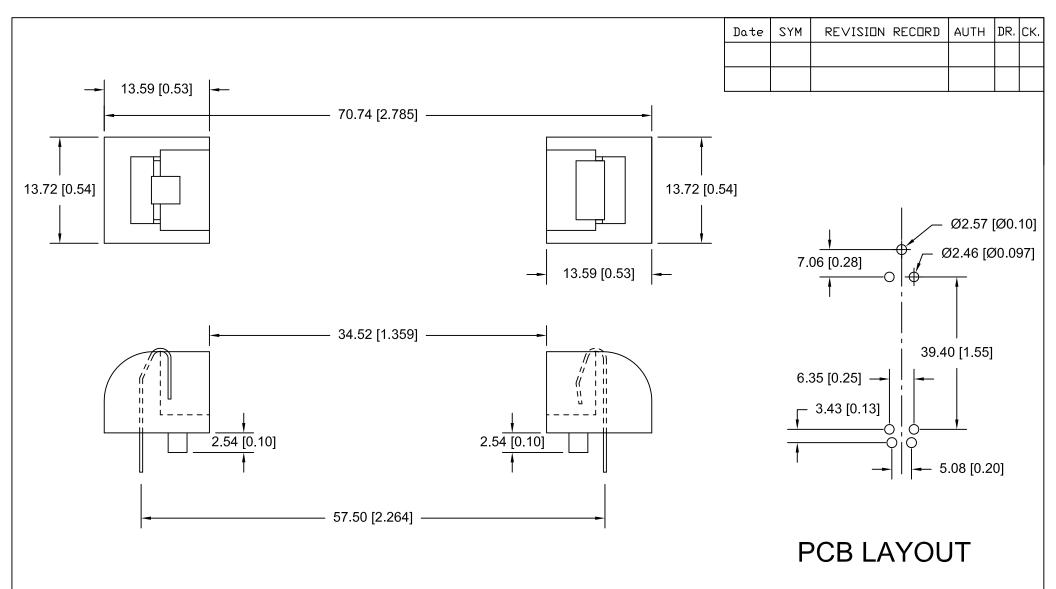

SPECIFICATION:

1. HOUSING: BLACK POLYPROPYLENE

FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959

TEMPERATURE RANGE: -10°C to +100°C

CONTACTS: NICKLE PLATED STAINLESS STEEL

ROHS COMPLIANT

Tolerance (Inches)	MPD M	emor	nory Protection Devices, Inc			
(IIICI)	200 Broad Hollow Road, Farmingdale, New York 11735					
Decimal				Scale	Drawn By B.S.	
X.XX ±.25 (.010)						
X.XXX ±.127 (.005)					Approved By T.B.	
Fractional	Title		DED 4005	ADI V		
± .8 (.030)	AAA BATTERY HOLDER ASSEMBLY					
Angular	Date	Date Drawing N		umber		
± 3°	05/13/11		C	B-AAA-P(