
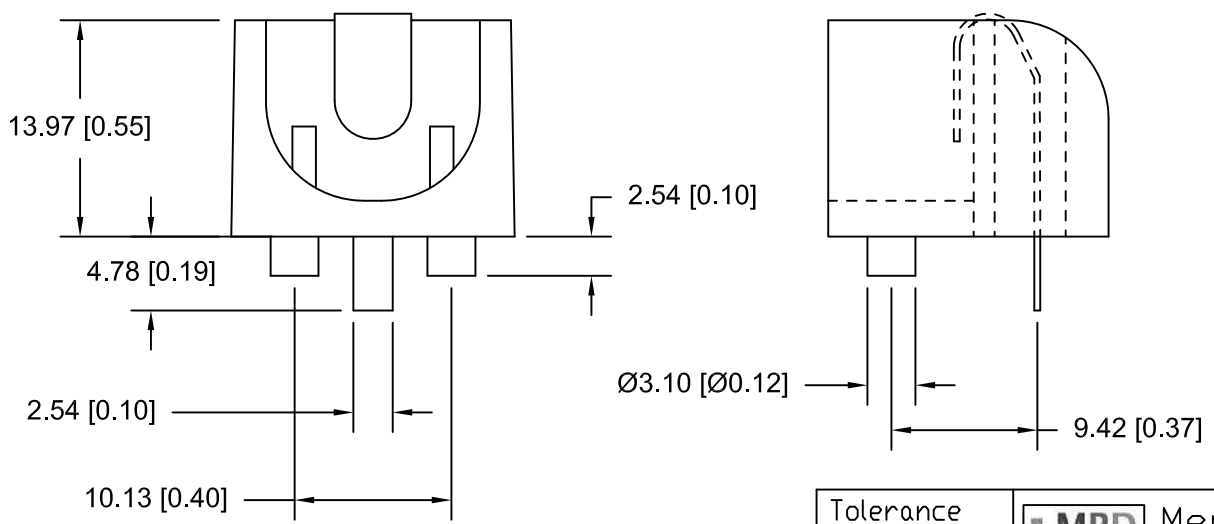



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|---------------------------|------|------|-----|
| 06/29/12 | A | Added Dim. 10.13 and 2.54 | T.B. | B.S. | |
| | | | | | |
| | | | | | |
| | | | | | |


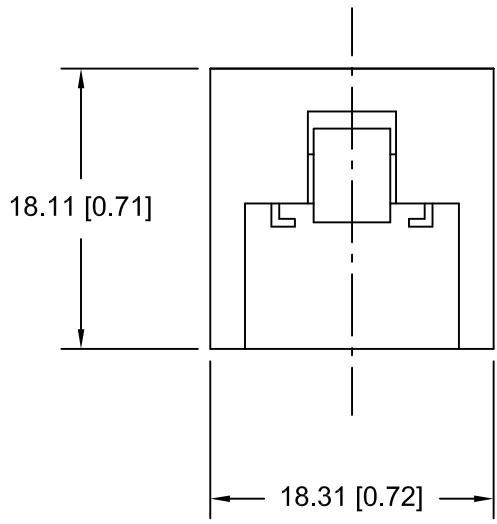


SPECIFICATION:

- HOUSING : BLACK POLYPROPYLENE
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 CONTACTS: NICKLE PLATED STAINLESS STEEL
 ROHS COMPLIANT

| | | | |
|---------------------------|---|--------------------------------|-----------------------------------|
| Tolerance (Inches) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | | |
| Decimal ±.5 (.020) | | Scale | Drawn By B.S. Approved By T.B. |
| Fractional ± .8 (.030) | Title AA BATTERY HOLDER; POSITIVE SIDE | | |
| Angular ± 3° | Date 06/29/12 | Drawing Number CB-AA-PC-POS | |


| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|------|-----|-----------------|------|-----|-----|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

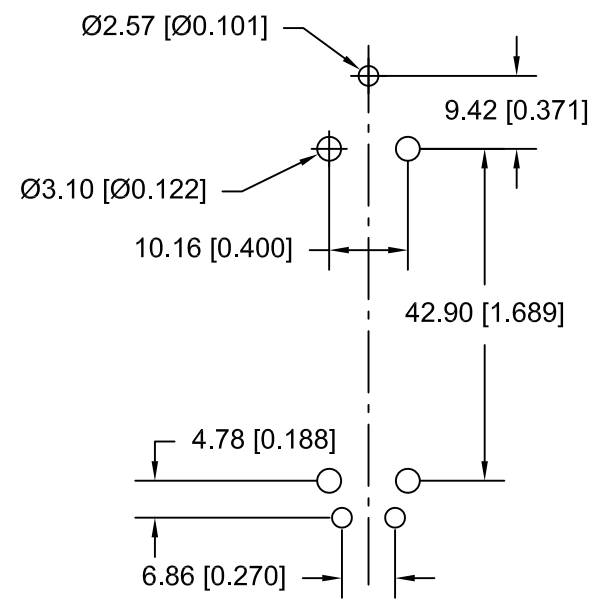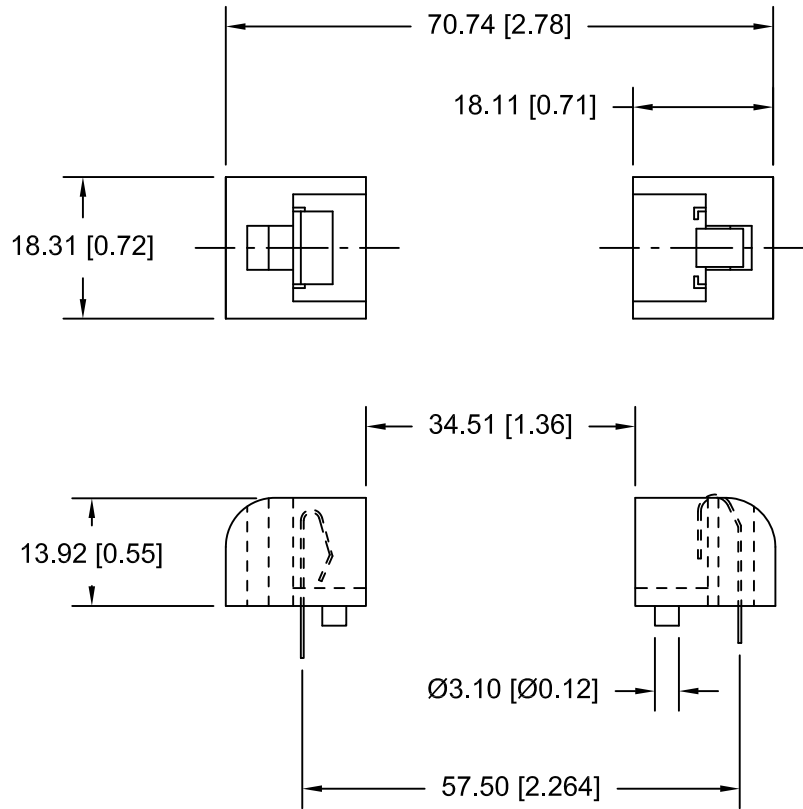

PCB LAYOUT

SPECIFICATION:

- HOUSING : BLACK POLYPROPYLENE
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 CONTACTS: NICKLE PLATED STAINLESS STEEL
 ROHS COMPLIANT

| | | | |
|--------------------------|---|--------------------------------|-----------------------------------|
| Tolerance (Inches) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | | |
| Decimal ±.5 (.020) | | Scale | Drawn By B.S. Approved By T.B. |
| Fractional ±.8 (.030) | Title AA BATTERY HOLDER ASSEMBLY | | |
| Angular ± 3° | Date 05/20/11 | Drawing Number CB-AA-PC-POS | |