


	DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
	12/02/05	Α	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
	08/17/12	В	ADDED FLAMMABILITY RATING AND TEMP. RANGE	T.B.	B.S.	

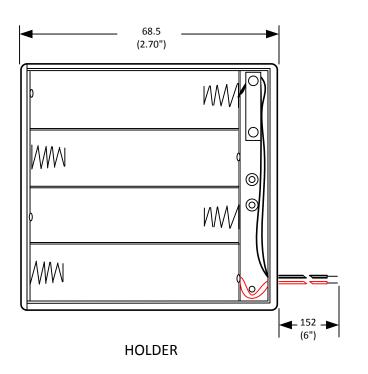





**COVER** 

## **SPECIFICATIONS:**

ITEM NO. : SBH-341AS

WIRE : UL 1007, #26 AWG

BLACK & RED : 150 MM  $\pm$  5MM STRIP & TIN : 5 MM  $\pm$  1MM

MATERIAL: A.B.S. RESIN, UL94-HB

BLACK COLOR

SPRING : .6 MM 65C SPRING WIRE
TEMPERATURE RANGE: -40°F TO +170°F
DESCR. : FOR FOUR "AA" CELLS WITH

SLIDING SWITCH, COVER & SCREW SERIES CONNECTION, 6 VOLTS

**ROHS COMPLIANT** 

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)	Memo	Memory Protection Devices, Inc.					
	200 Broad Hollow Road, Farmingdale, New York 11735						
DECIMAL			SCALE	DRAWN BY S.C.			
<sup>+</sup> .5 (.020)				APPROVED BY			
FRACTIONAL + 8 (.030)	4 CELL AA HOLDER WITH COVER						
ANGULAR  + 3°	DATE 08/17/2012	DRAWING NUMBER SBH-341AS					