


| Date    | SYM | REVISION RECORD                | AUTH | DR.  | CK. |
|---------|-----|--------------------------------|------|------|-----|
| 8/02/13 | Α   | UPDATED TO ROHS 2<br>COMPLIANT | T.B. | B.S. |     |
|         |     |                                |      |      |     |
|         |     |                                |      |      |     |
|         |     |                                |      |      |     |
|         |     |                                |      |      |     |

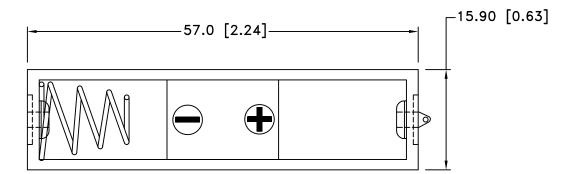

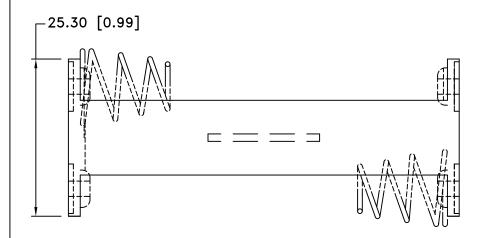



## NOTES:

Plastic material - Polypropylene, PP-1040

Flammability Rating -UL94-HB, UL File NO. E216959

Temperature Range: -10°C to +100°C Springs - Nickel Plated Spring Steel Rivets - Brass, Nickel Plated

9Volt Snaps - Brass, Nickel Plated

Contact Resistance: Under  $50m\Omega$  for +/- contacts per EIA-540J000

**ROHS 2 COMPLIANT** 

| Tolerance (Except as noted) | MPD Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 |                |       |                  |  |  |  |
|-----------------------------|---|----------------|-------|------------------|--|--|--|
|                             |   |                |       |                  |  |  |  |
| decimal                     |   |                | Scale | Drawn By B.S.    |  |  |  |
| ±.5 (.020)                  |   |                |       | Approved By T.B. |  |  |  |
| Fractional                  | Title   |                |       |                  |  |  |  |
| ± .8 (.030)                 | TWO "AA" CELL HOLDER WITH SOLDER LUGS   |                |       |                  |  |  |  |
| Angular                     | Date  | Drawing Number |       |                  |  |  |  |
| ± 3°                        | 8/02/13   | BC32AAL        |       |                  |  |  |  |