

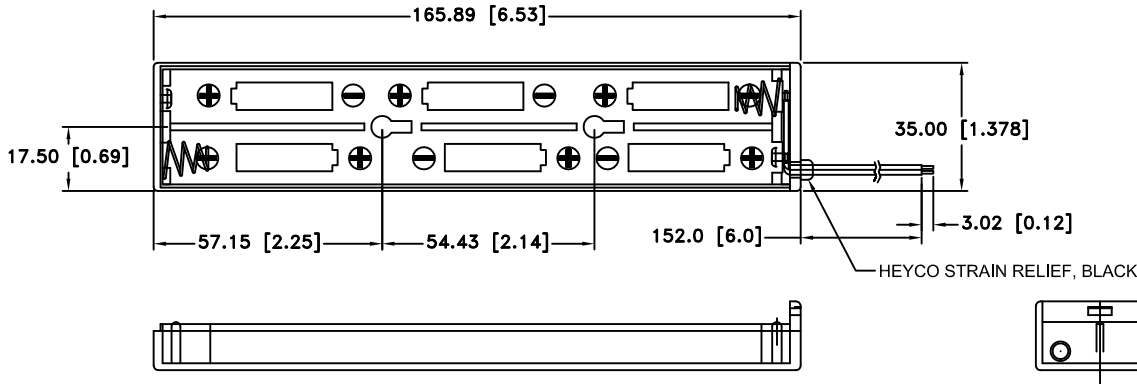




Date	SYM	REVISION RECORD	AUTH	DR.	CK.
4/09/10	D	UPDATED NOTES ADDED DIM. 17.50 AND 57.15 ADDED HEYCO STRAIN RELIEF	T.B.	B.S.	
4/12/13	E	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

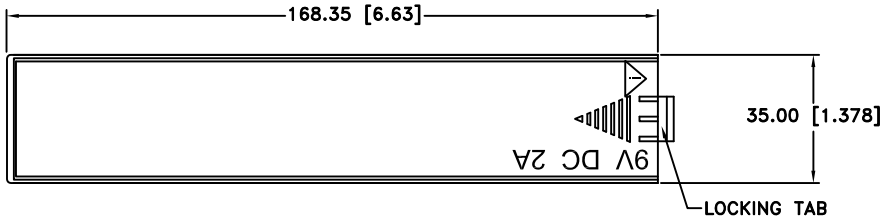

- NOTES:
1. MATERIAL: POLYPROPYLENE, WHITE, UL94V-0, ULFILE NO. E140331
 2. TEMPERATURE RANGE: -30°C TO +100°C
 3. HDT 134°C PER ASTM D648, STEEL NICKEL PLATED HARDWARE AND SPRINGS
 4. WIRES : 24 AWG, UL2468, CSA, TR64, WHITE

ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
		decimal ±.5 (.020)	Scale
Fractional ± .8 (.030)	Title 6 "AA" BATTERIES CASE WITH COVER		
Angular ± 3°	Date 04/12/13	Drawing Number BK-6089	