



The IP-50 provides easy and direct connection to products using networks and the Internet.

The IP-50 come with a standard Ethernet connection, RS-232 interface and on-board fully programmable and customizable web server. It can be used to control and monitor any RS-232 device remotely.

Users can design and setup their own user interface and functionality or access the expanding portfolio of standard product packages from www.digitalview.com/ip-50 website.

Applications include:

- ✓ Digital Signage installations
- ✓ Industrial systems monitoring and control
- ✓ Environmental monitoring
- ✓ Control and monitoring of Digital View products

SPECIFICATION

Network Interface
 Ethernet 10BaseT
 RJ-45 connector x 1
 Supported protocols: IP, TCP, DHCP


RS-232 Interface
 DB9-Female connector x 1
 Serial baud rate: 2400
 Data bits: 8
 Parity : none
 Stop bits: 1
 RS-232: TxD, RxD

Power
 Power input : 7.5V DC
 Power consumption : 200mA @7.5V

Environmental
 Operating temperature : 0°C to 50°C
 Relative humidity : 5%-95% relative humidity (Non-condensing)

Dimension
 Dimension (W x D x H) : 86mm x 69mm x 24.5mm

Weight
 Weight (net) : 130g

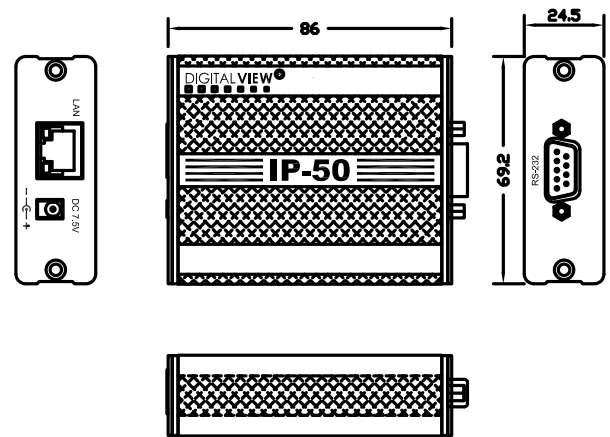

Brand names belong to their respective owners. Specifications subject to change without notice. August 2007

ASIA

Digital View Ltd.
 19th floor Tai Tung Building
 8 Fleming Road
 Wanchai, Hong Kong

Tel: (852) 2861 3615
 Fax: (852) 2520 2987
 Email: sales@digitalview.com

USA

Digital View Inc.
 18440 Technology Drive
 Building 130
 Morgan Hill, CA 95037
 USA

Tel: (1) 408-782-7773
 Fax: (1) 408-782-7883
 Email: sales@digitalview.com

EUROPE

Digital View Ltd.
 6 Marylebone Passage,
 London, W1W 8EX,
 UK

Tel: +44 20-7631-2150
 Fax: +44 20-7631-2156
 Email: sales@digitalview.com

Please visit our web site for more information: www.digitalview.com

