



# Series 810 & 822 Economy Vertisocket™ w/Bifurcated Contacts

## FEATURES


- High-volume Vertical Display Mounting Applications
- Useful for Connection of Board-to-Board Jumpers and DIP Switches, as well as LED Devices

## GENERAL SPECIFICATIONS

- **STANDARD BODY MATERIAL:** black UL 94 V-0 4/6 Nylon
- **BIFURCATED CONTACTS:** Grade-A spring-tempered Phosphor Bronze per QQ-B-750
- **STANDARD CONTACT PLATING:** 50μ [1.27μ] min. matte Sn per ASTM B545-97 over 50μ [1.27] Ni per QQ-N-290 –OR– 90/10 Sn/Pb per MIL-T-10727 Type 1 over 50μ [1.27] Ni per QQN-290
- **CONTACT CURRENT RATING:** 1 amp
- **OPERATING TEMPERATURE:** 221°F [105°C]
- **INSERTION FORCE:** 110g/pin average
- **WITHDRAWAL FORCE:** 75g/pin average
- **FLAT LEADS:** up to 0.014 [0.36] thick and 0.020 [0.51] wide
- **ROUND LEADS:** up to 0.020 [0.51] dia.
- **LEAD LENGTHS:** 0.75-0.160 [1.91-4.06] dia.


## MOUNTING CONSIDERATIONS

- **SUGGESTED PCB HOLE SIZE**  
 For P/N 14-810-90R = 0.036 ± 0.002 [0.91 ± 0.05] dia.  
 For P/N XX-822-90E = 0.044 ± 0.002 [1.12 ± 0.05] dia.

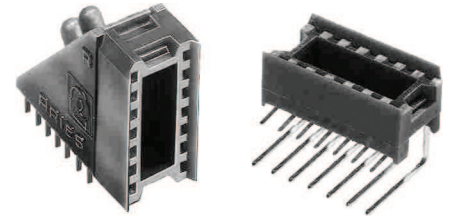


## ORDERING INFORMATION


**XX-822-90 E XXXX**  
**14-810-90R XXXX**

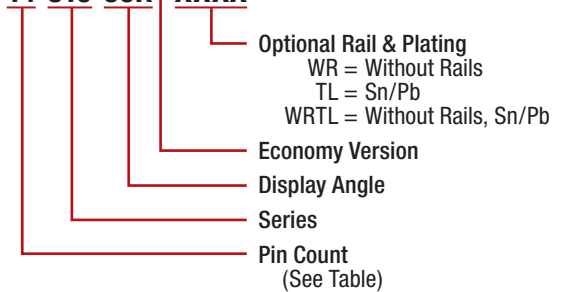

### SERIES 810 – VERTICAL MOUNTING

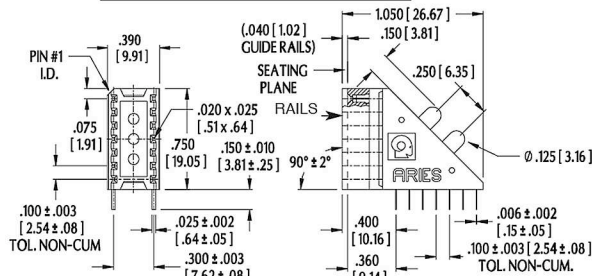

### SERIES 822 - HORIZONTAL MOUNTING

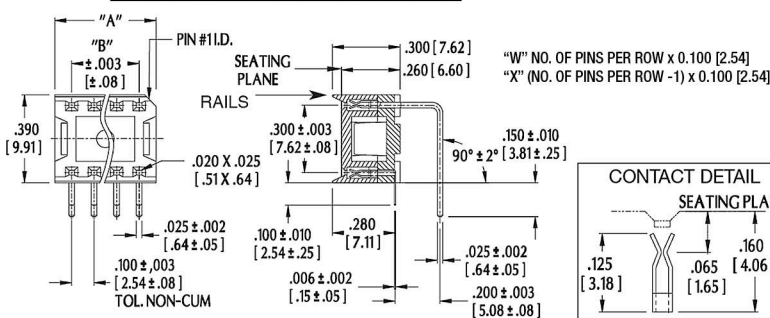

Body Style	Dim. "Y"	Dim. "Z"	Pin Count
A	0.450 [11.43]	0.300 [7.62]	8, 10
B	0.750 [19.05]	0.600 [15.24]	8, 10, 12, 14, 16
B	0.850 [21.59]	0.700 [17.78]	8, 10
B	0.950 [24.13]	0.800 [20.32]	8, 10, 12, 14, 16

ALL DIMENSIONS: INCHES [MILLIMETERS]  
 ALL TOLERANCES: ±0.005 [0.13] UNLESS OTHERWISE SPECIFIED  
 FOR HORIZONTAL MOUNTING, SEE DATA SHEET 13005  
 CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS

CUSTOMIZATION: ARIES SPECIALIZES IN CUSTOM DESIGN AND PRODUCTION. SPECIAL MATERIALS, PLATINGS, SIZES, AND CONFIGURATIONS CAN BE FURNISHED, DEPENDING ON QUANTITY.  
 ARIES RESERVES THE RIGHT TO CHANGE PRODUCT GENERAL SPECIFICATIONS WITHOUT NOTICE  
 PRINTOUTS OF THIS DOCUMENT MAY BE OUT-OF-DATE AND SHOULD BE CONSIDERED UNCONTROLLED



2609 Bartram Road • Bristol, PA 19007-6810 USA  
 TEL 215-781-9956 • FAX 215-781-9845  
 WWW.ARIESELEC.COM • INFO@ARIESELEC.COM



13003  
 Rev. 6.1  
 1 of 1