

NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:

HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
 AVAILABLE IN TEN COLORS.
 CONTACT BLADE: BERYLLIUM COPPER, GOLD PLATED
 PER MIL-G-45204 B TYPE 1
 0.00001" [0.000254] THK MINIMUM.
 SPRING: STAINLESS STEEL TYPE 302.



2. PERFORMANCE

MAXIMUM CURRENT: 1.0 AMPS
 MAXIMUM VOLTAGE: 600 W.V.D.C.
 MAXIMUM TEMPERATURE: 200°F (93°C)

3. FEATURES:

HOOK FITS COMPONENTS UP TO $\phi 0.025$ " [0.64].
 PIN PERMITS CONNECTION TO 0.025" [0.64] SQ.
 OR $\phi 0.030$ " [0.76] SOCKETS.

LTR		DESCRIPTION	REVISIONS	DATE	APPROVED
-----	--	-------------	-----------	------	----------

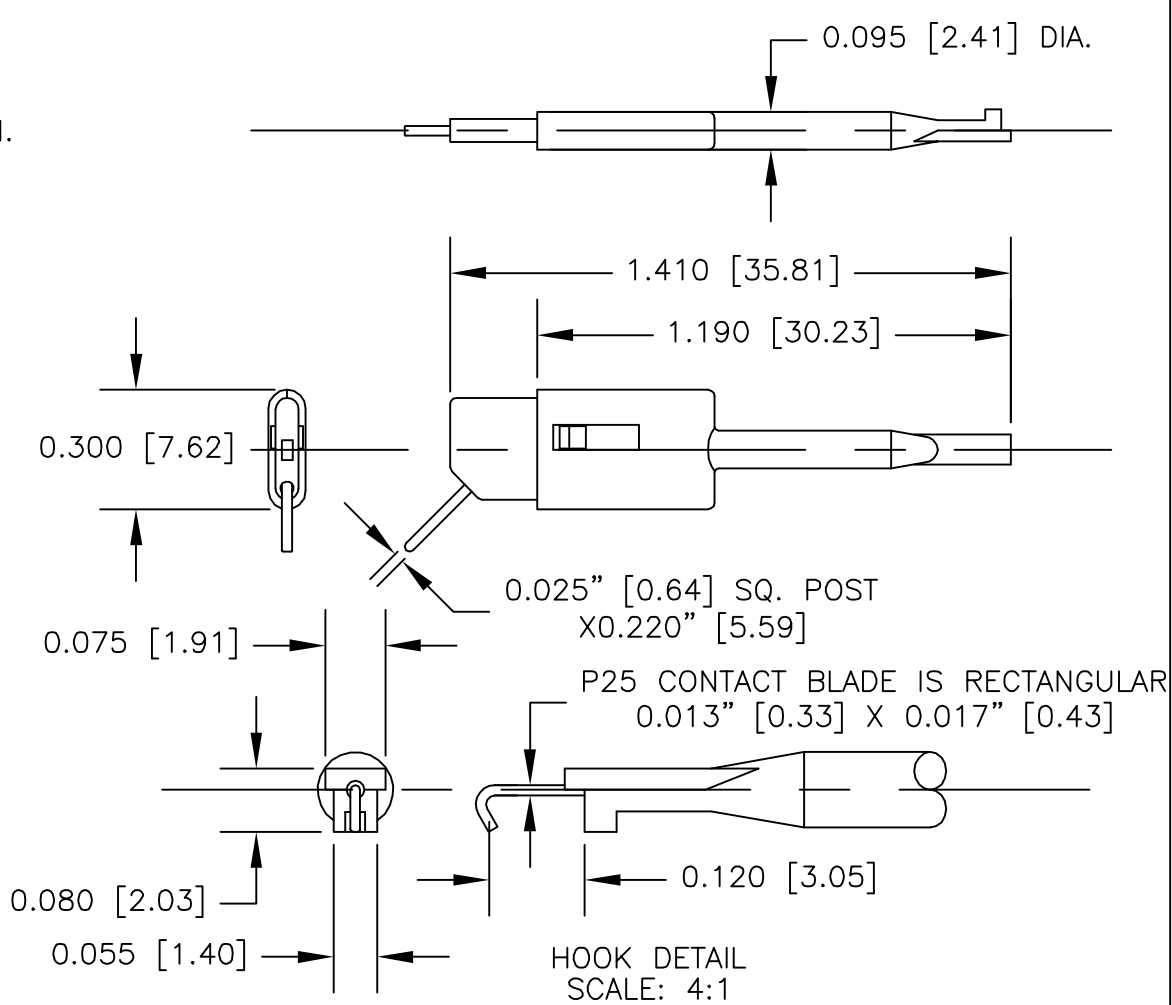

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTE.	DRAWN	6/09	DESCRIPTION PICO HOOK WITH 0.25 [6.35] POST GOLD PLATED
			APPROVED BY		
		FINISH SEE NOTE.			SIZE A CODE IDENT NO. 08505 DRAWING NO. P25COLOR REV.
NEXT ASSY	USED ON				SCALE 2:1 SHEET 1 OF 1
APPLICATION		DO NOT SCALE DRAWING			

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.