


NOTES: UNLESS OTHERWISE SPECIFIED


- CONSTRUCTION:
 HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
 AVAILABLE IN TEN COLORS.
 CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-G-45204 B TYPE 1 0.0001" [0.00254] THICK MINIMUM.
 SPRING: STAINLESS STEEL TYPE 302.

- PERFORMANCE:
 MAXIMUM CURRENT: 6.1 AMPS WITH 77° TEMPERATURE RISE.
 MAXIMUM VOLTAGE: 3.0 KV
 MAXIMUM TEMPERATURE: 200°F (93°C)

- FEATURES:
 HOOK FITS COMPONENTS UP TO $\phi 0.045"$ [1.14].
 PIN PERMITS CONNECTION TO $0.025"$ [0.64] SQ. OR $\phi 0.030"$ [0.76] SOCKETS.



ACTUAL SIZE

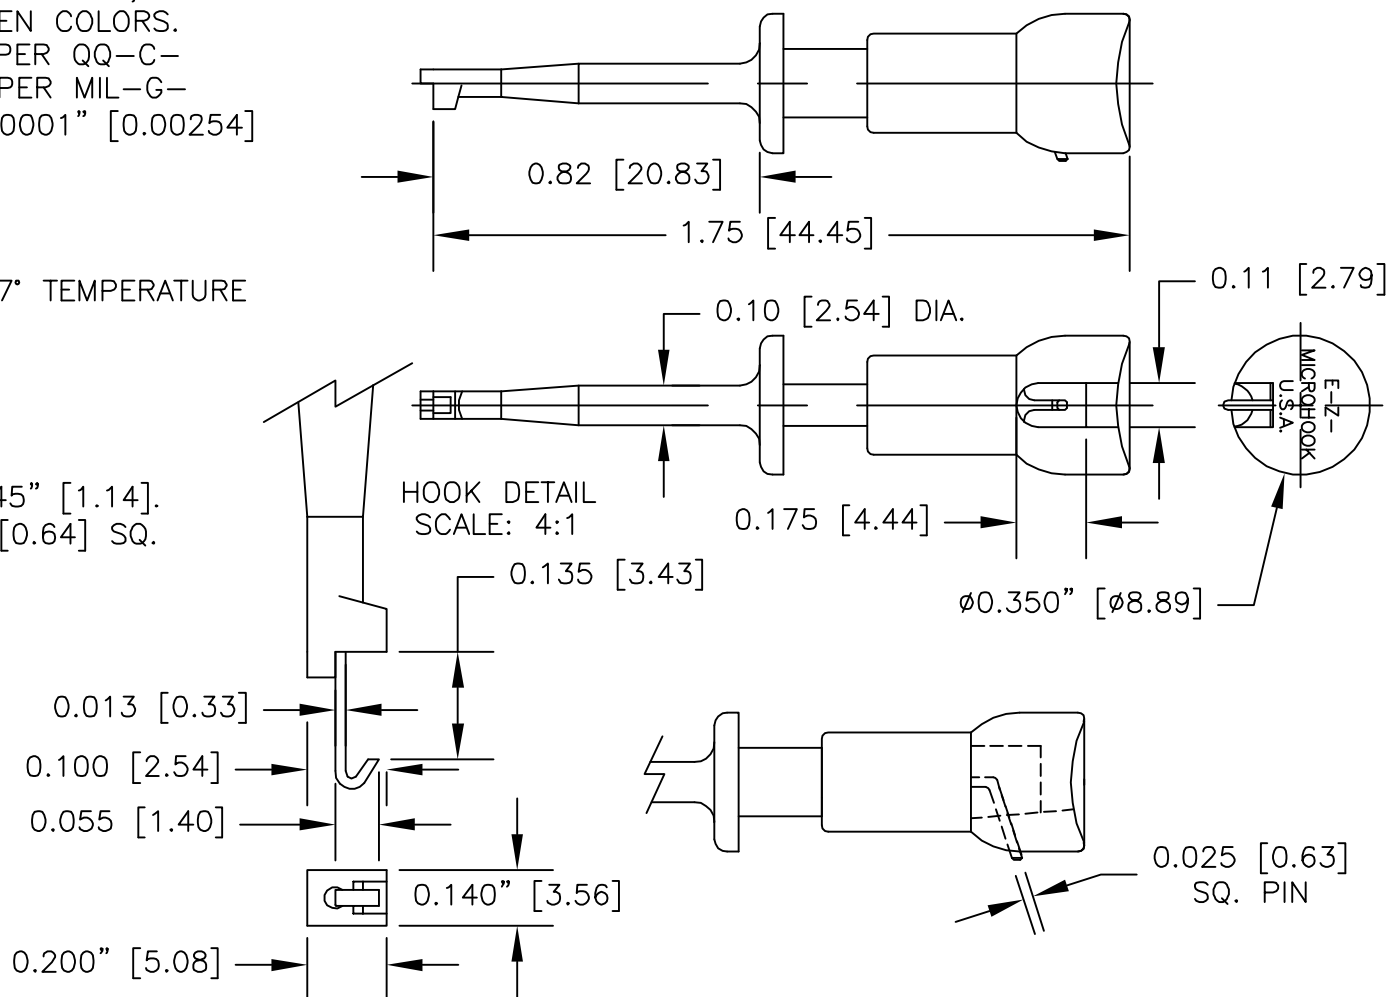

LTR	DESCRIPTION	REVISIONS	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±		CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
MATERIAL SEE NOTE.		APPROVALS	DATE		
FINISH SEE NOTE.		DRAWN	APPROVED BY	DESCRIPTION E-Z-MICRO HOOK WITH 0.025 [0.64] SQUARE PIN	
NEXT ASSY	USED ON			SIZE	CODE IDENT NO.
APPLICATION		DO NOT SCALE DRAWING		A	08505
				DRAWING NO.	REV.
				XM25COLOR	
				SCALE	SHEET 1 OF 1
				2:1	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.