



MBR2030CT thru MBR20150CT

SCHOTTKY BARRIER RECTIFIERS	REVERSE VOLTAGE - 30 to 150Volts FORWARD CURRENT - 20.0 Amperes																																																																																																										
FEATURES <ul style="list-style-type: none"> • Metal of silicon rectifier , majority carrier conduction • Guard ring for transient protection • Low power loss,high efficiency • High current capability,low VF • High surge capacity • Plastic package has UL flammability classification 94V-0 • For use in low voltage,high frequency inverters,free wheeling, and polarity protection applications 	<p style="text-align: center;">TO-220AB</p> <p>Dimensions in inches and (millimeters)</p>																																																																																																										
MECHANICAL DATA <ul style="list-style-type: none"> • Case: TO-220AB molded plastic • Polarity: As marked on the body • Weight: 0.08ounces,2.24 grams • Mounting position :Any 																																																																																																											
MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS <p>Rating at 25°C ambient temperature unless otherwise specified.</p> <p>Single phase, half wave ,60Hz, resistive or inductive load.</p> <p>For capacitive load, derate current by 20%</p>	<table border="1"> <thead> <tr> <th>CHARACTERISTICS</th> <th>SYMBOL</th> <th>MBR 2030CT</th> <th>MBR 2040CT</th> <th>MBR 2050CT</th> <th>MBR 2060CT</th> <th>MBR 2080CT</th> <th>MBR 20100CT</th> <th>MBR 20150CT</th> <th>UNIT</th> </tr> </thead> <tbody> <tr> <td>Maximum Recurrent Peak Reverse Voltage</td> <td>V_{RMM}</td> <td>30</td> <td>40</td> <td>50</td> <td>60</td> <td>80</td> <td>100</td> <td>150</td> <td>V</td> </tr> <tr> <td>Maximum RMS Voltage</td> <td>V_{RMS}</td> <td>21</td> <td>28</td> <td>35</td> <td>42</td> <td>56</td> <td>70</td> <td>105</td> <td>V</td> </tr> <tr> <td>Maximum DC Blocking Voltage</td> <td>V_{DC}</td> <td>30</td> <td>40</td> <td>50</td> <td>60</td> <td>80</td> <td>100</td> <td>150</td> <td>V</td> </tr> <tr> <td>Maximum Average Forward Rectified Current (See Fig.1)</td> <td>I_(AV)</td> <td colspan="6">20.0</td> <td>A</td> </tr> <tr> <td>Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)</td> <td>I_{FSM}</td> <td colspan="6">150</td> <td>A</td> </tr> <tr> <td>Peak Forward Voltage (Note1) IF=10A @T_J=25°C IF=10A @T_J=125°C IF=20A @T_J=25°C IF=20A @T_J=125°C</td> <td>V_F</td> <td>- 0.57 0.84 0.72</td> <td>0.80 0.70 0.95 0.85</td> <td>0.85 0.75 0.95 0.85</td> <td>0.95 0.85 1.05 0.95</td> <td>mA</td> </tr> <tr> <td>Maximum DC Reverse Current @T_J=25°C at Rated DC Bolcking Voltage @T_J=125°C</td> <td>I_R</td> <td>0.1 15</td> <td>0.1 10</td> <td>0.1 7.5</td> <td>0.1 5.0</td> <td>mA</td> </tr> <tr> <td>Typical Junction Capacitance (Note2)</td> <td>C_J</td> <td>400</td> <td colspan="4">320</td> <td>pF</td> </tr> <tr> <td>Typical Thermal Resistance (Note3)</td> <td>R_{θJC}</td> <td colspan="2">1.5</td> <td colspan="3" rowspan="3">3.5</td> <td>°C/W</td> </tr> <tr> <td>Operating Temperature Range</td> <td>T_J</td> <td colspan="6">-55 to +150</td> <td>°C</td> </tr> <tr> <td>Storage Temperature Range</td> <td>T_{STG}</td> <td colspan="6">-55 to +175</td> <td>°C</td> </tr> </tbody> </table> <p>NOTES:1.300us pulse width,2% duty cycle. 2.Measured at 1.0 MHz and applied reverse voltage of 4.0V DC. 3.Thermal resistance junction to case.</p>	CHARACTERISTICS	SYMBOL	MBR 2030CT	MBR 2040CT	MBR 2050CT	MBR 2060CT	MBR 2080CT	MBR 20100CT	MBR 20150CT	UNIT	Maximum Recurrent Peak Reverse Voltage	V _{RMM}	30	40	50	60	80	100	150	V	Maximum RMS Voltage	V _{RMS}	21	28	35	42	56	70	105	V	Maximum DC Blocking Voltage	V _{DC}	30	40	50	60	80	100	150	V	Maximum Average Forward Rectified Current (See Fig.1)	I _(AV)	20.0						A	Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I _{FSM}	150						A	Peak Forward Voltage (Note1) IF=10A @T _J =25°C IF=10A @T _J =125°C IF=20A @T _J =25°C IF=20A @T _J =125°C	V _F	- 0.57 0.84 0.72	0.80 0.70 0.95 0.85	0.85 0.75 0.95 0.85	0.95 0.85 1.05 0.95	mA	Maximum DC Reverse Current @T _J =25°C at Rated DC Bolcking Voltage @T _J =125°C	I _R	0.1 15	0.1 10	0.1 7.5	0.1 5.0	mA	Typical Junction Capacitance (Note2)	C _J	400	320				pF	Typical Thermal Resistance (Note3)	R _{θJC}	1.5		3.5			°C/W	Operating Temperature Range	T _J	-55 to +150						°C	Storage Temperature Range	T _{STG}	-55 to +175						°C
CHARACTERISTICS	SYMBOL	MBR 2030CT	MBR 2040CT	MBR 2050CT	MBR 2060CT	MBR 2080CT	MBR 20100CT	MBR 20150CT	UNIT																																																																																																		
Maximum Recurrent Peak Reverse Voltage	V _{RMM}	30	40	50	60	80	100	150	V																																																																																																		
Maximum RMS Voltage	V _{RMS}	21	28	35	42	56	70	105	V																																																																																																		
Maximum DC Blocking Voltage	V _{DC}	30	40	50	60	80	100	150	V																																																																																																		
Maximum Average Forward Rectified Current (See Fig.1)	I _(AV)	20.0						A																																																																																																			
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I _{FSM}	150						A																																																																																																			
Peak Forward Voltage (Note1) IF=10A @T _J =25°C IF=10A @T _J =125°C IF=20A @T _J =25°C IF=20A @T _J =125°C	V _F	- 0.57 0.84 0.72	0.80 0.70 0.95 0.85	0.85 0.75 0.95 0.85	0.95 0.85 1.05 0.95	mA																																																																																																					
Maximum DC Reverse Current @T _J =25°C at Rated DC Bolcking Voltage @T _J =125°C	I _R	0.1 15	0.1 10	0.1 7.5	0.1 5.0	mA																																																																																																					
Typical Junction Capacitance (Note2)	C _J	400	320				pF																																																																																																				
Typical Thermal Resistance (Note3)	R _{θJC}	1.5		3.5			°C/W																																																																																																				
Operating Temperature Range	T _J	-55 to +150						°C																																																																																																			
Storage Temperature Range	T _{STG}	-55 to +175						°C																																																																																																			

RATING AND CHARACTERISTIC CURVES

MBR2030CT thru MBR20150CT

HY

FIG. 1 – FORWARD CURRENT DERATING CURVE

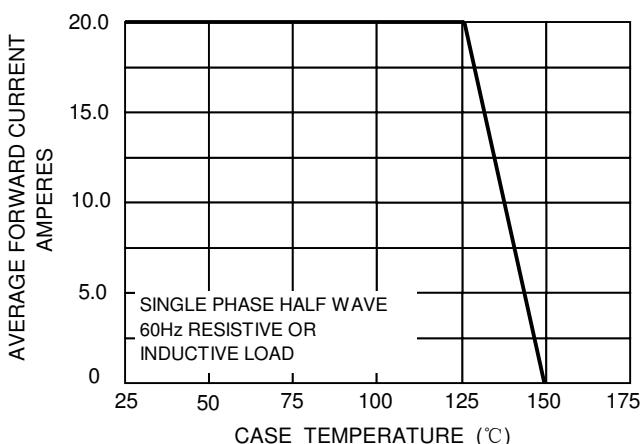


FIG. 2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

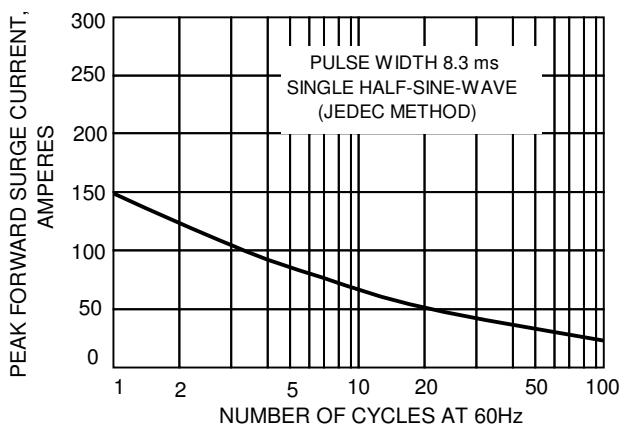


FIG.3-TYPICAL REVER CHARACTERISTICS

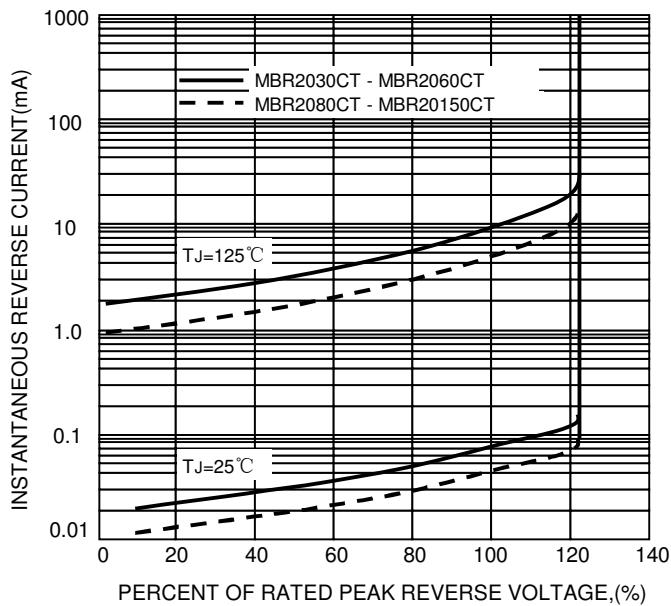


FIG.4-TYPICAL FORWARD CHARACTERISTICS

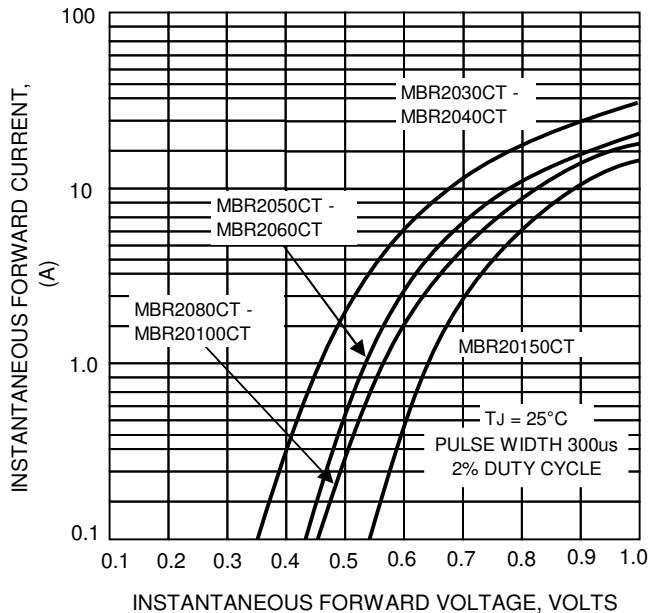


FIG.5 – TYPICAL JUNCTION CAPACITANCE

