


**CUSTOMER DRAWING**

P/N: 3800S 375/-3 REV B

PART NO.	FINISH	CMA RANGE
3800S 375A-3	PRETINNED	1600 TO 5000
3800S 375AB-3	NONE	
3800S 375AD-3	POST-TIN	

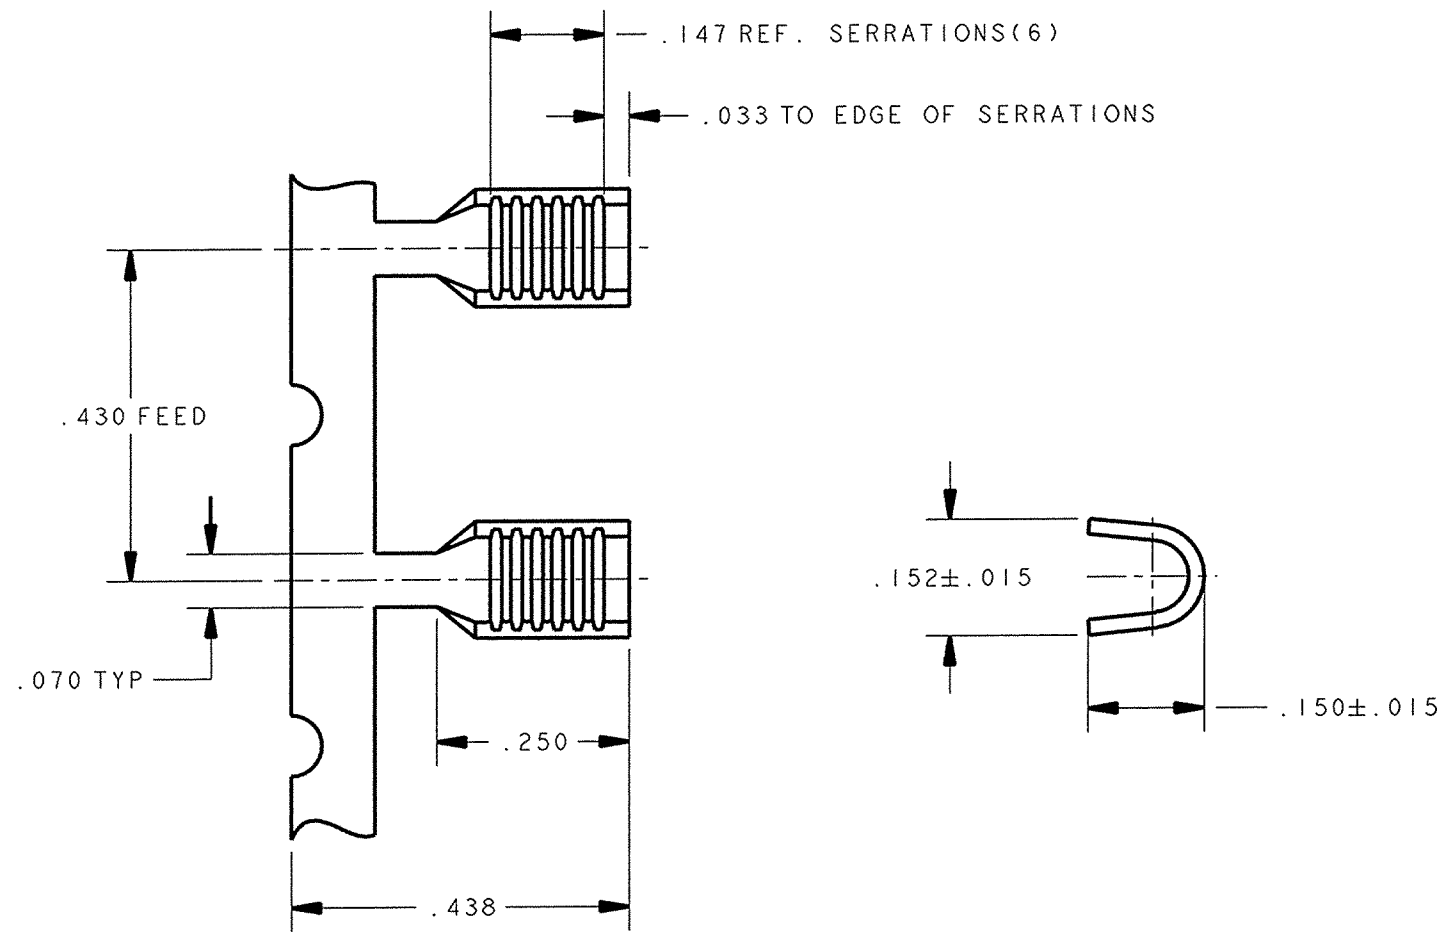

- NOTES:
- PAPER INTERLEAVING ADDED TO REDUCE TANGLING IN REELS.
  - FOR THROUGH SPLICES USED IN BENCH APPLICATOR, THE PART NUMBER REMAINS THE SAME AS IN THE TABLE (I.E. 3800S 375A-3). FOR REELING SEE FIGURE 2.
  - FOR PIGTAIL SPLICES USED IN BENCH APPLICATOR ADD SUFFIX "PP" TO PART NUMBER (I.E. 3800S 375A-3PP). FOR REELING SEE FIGURE 1.
  - FOR PIGTAIL & THROUGH SPLICE USED IN NARROW-LINE AIR PRESS, THE PART NUMBER REMAINS THE SAME AS IN THE TABLE (I.E. 3800S 375A-3). FOR REELING SEE FIGURE 2.
  - RECOMMENDED WIRE COMBINATIONS:
    - A. (1) STRANDED WIRE
    - (2) MAGNET WIRES
    - B. (2) MAGNET WIRES NOT EXCEEDING 2 1/2 WIRE SIZES DIFFERENCE (I.E. 18 & 20 1/2)
    - C. (3) MAGNET WIRES UPON ARK-LES CONFIRMATION
  - MAGNET WIRES ARE TO BE PLACED IN SPLICE FIRST. STRANDED WIRES ARE TO BE PLACED ON TOP OF OR ADJACENT TO MAGNET WIRE.
  - REFER TO CRIMP HEIGHT FOR APPLICATION DATA.

ARK-LES UNCONTROLLED

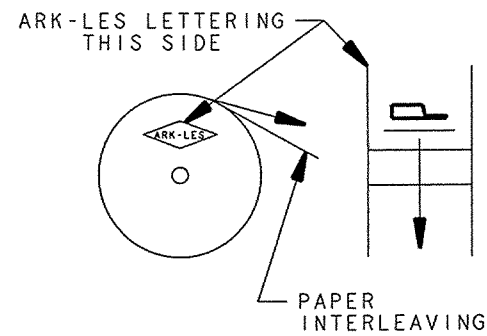


FIGURE 1  
(I.E. 3800S 375-3PP)

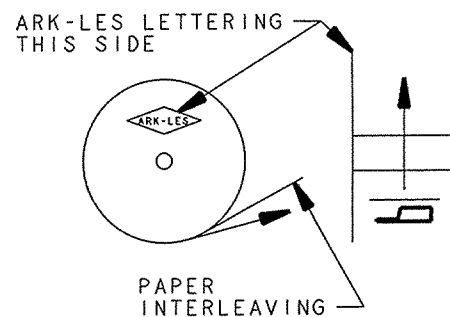


FIGURE 2  
(I.E. 3800S 375-3)

				PRINT DIST.	PROD. REL.	JM 7716	10-31-94	CHK'D	TOLERANCES UNLESS OTHERWISE SPECIFIED	<p>STOUGHTON, MA</p> <p><b>ORIGINAL IF RED</b></p>
				DEPT #	QUOTE REL.			DO 1/18/05	DECIMALS ±.010	
				ENG I	DRAWN BY	BJ CARUTHERS	10/20/94	APP.	METRIC ±0.25mm	<p><b>PART CUSTOMER DRAWING</b></p> <p><b>NAME TERMINAL, SPLICE</b></p> <p>CAD#: 3800S_375-3-REVB_CUST.DRW</p>
				SALES	SUPERSEDES DWG. DATED:			1-27-05	ANGLES ±1°	
				STO I	SCALE 4:1	DO NOT SCALE PRINT			MATERIAL: .020±.001 THK BRASS C26000; 1/2 HARD	<p>P/N: 3800S 375/-3</p>
				RAL	FINISH:	SEE TABLE				
REV.	DESCRIPTION	DATE	DR.	JZ					3RD ANGLE PROJECTION	REV B
				CHINA					DWG SIZE: B	