



IGBT BASED DC SOLID-STATE RELAY



SCI0100600	
Control voltage range	4.5-32VDC
Max transient peak voltage	600V
Advised max. DC Mains peak voltage	(Depends on protection clamping voltage)
Max. Load Current (with heatsink)	100ADC

- ▶ Latest high voltage IGBT technology generation.
- ▶ New innovative isolated driver ensuring fast power transistor turn on and off therefore low power transient.
- ▶ Ultra low output leakage current
- ▶ Low control current consumption
- ▶ Triggered control input to avoid linear control risks
- ▶ Low conducted and radiated disturbances

DC Mains voltage range	Load current range	Control input voltage range	In & case / Out Insulation	Connections	Dimensions (WxHxD)	Weight
(Depends on protection clamping voltage)	0 to 100A (with heatsink)	4.5-32VDC	4kV	M3 round tabs M5 round tabs	44.5 x 58.2 x 27 (mm)	100g

Fig. 1

HIGH SIDE WIRING DIAGRAM
(Load connected to “-“)

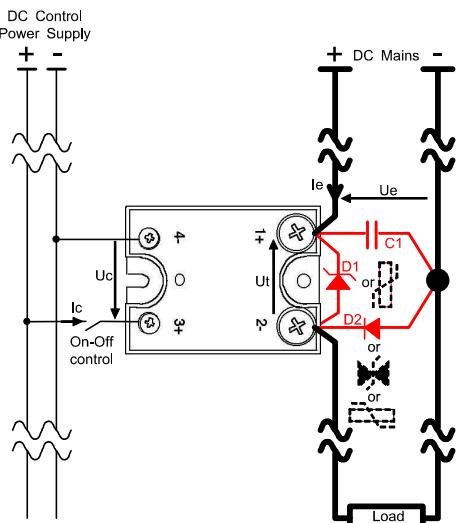


Fig. 2

LOW SIDE WIRING DIAGRAM
(Load connected to “+“)


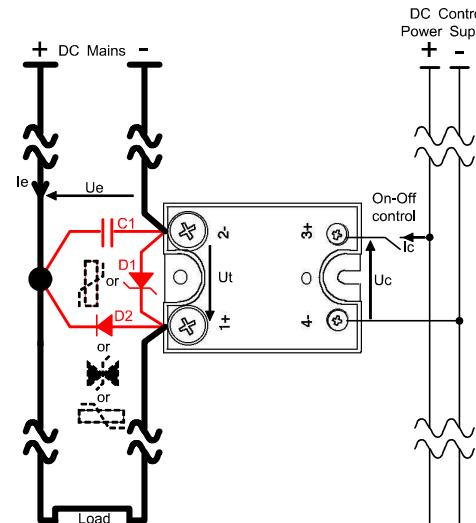


Fig. 3


INTERNAL DIAGRAM

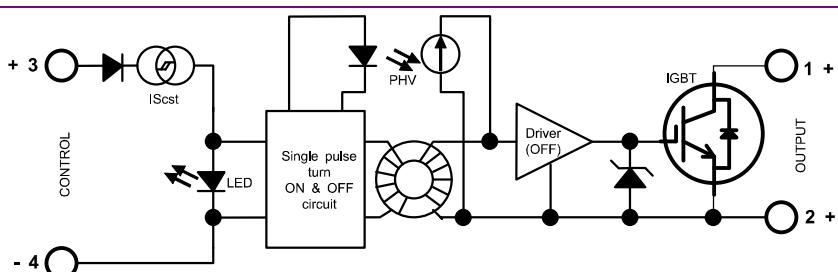

Proud to serve you

CONTROL INPUT CHARACTERISTICS

INPUT CIRCUIT	CHARACTERISTIC	LABEL	VALUE	INFO.	Fig. 4	CONTROL CURRENT vs. CONTROL VOLTAGE
	Nom. Control voltage	U_{Cnom}	12-24VDC			
	Nom. Control current	I_{Cnom}	35mAADC			
	Control voltage range	U_c	4.5 – 32VDC	typical=4.3V		
	Control current consumption	I_c	25 – 42mAADC	See curve		
	Releasing control voltage	$U_{Coffmax}$	1VDC	Typical= 3.5V		
	Max. reverse control voltage	$-U_{Cmax}$	32VDC	$-I_{Cmax} < 100\mu A$		
	Input impedance	R_{in}	Current limitation	See curve		

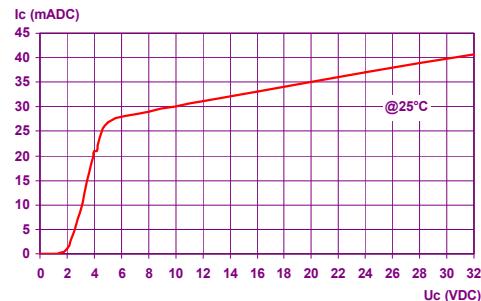

TIME CHARACTERISTICS

TIME CHARACT.	CHARACTERISTIC	LABEL	VALUE		TURN-ON	TURN-OFF
	Turn on time	t_{on}	10µs			
	Turn on delay	t_{don}	600µs			
	Turn off time	t_{off}	10µs			
	Turn off delay	t_{doff}	100µs			
	Max. On-Off frequency	$F_{(on-off)}$	700Hz			

POWER OUTPUT CHARACTERISTICS

POWER CIRCUIT	CHARACTERISTIC	LABEL	VALUE		INFO.
	Ut	Ue	Min = VCEsat (Max Advised = 350VDC)		Depends on protection clamping voltage (D1)
	Non-repetitive peak voltage	U_{tp}	600V		
	Overvoltage protection	D1	Not integrated A voltage clamping mean must be connected across the terminals 1 & 2 (see fig 1 & 2)		Please consult us to select the right protective components
	Off-state max reverse voltage drop (internal diode)	$-U_t$	1.4V		@ $I_e=100A$
	Maximum nominal currents	$I_{e max}$	Resistive 100A	Motor Please contact us	See fig. 9
	Max. non-repetitive non-switched peak current	I_{epeak}	550A		
	Min. load current	I_{emin}	0mA		@ $T_j=25^\circ C$
	Max. leakage current	$I_{elk max}$	1mA		@ U_{tp} @ T_{jmax}
	Voltage drop : Resistance	r_t	6.4mΩ		@ $T_j=125^\circ C$
	Voltage drop : Voltage	v_t	0.8V		@ $T_j=125^\circ C$
	Max. on-state voltage drop (Vcesat = $v_t + r_t \cdot I_e$)	V_{CEsat}	1.35V @ $T_j=25^\circ C$	1.45V @ $T_j=125^\circ C$	@ I_{emax}
	Typ. output capacitance	C_{out}	300pF		@ U_{tp}
	Junction/case thermal resistance	R_{thjc}	0.385K/W		
	Built-in heatsink thermal resistance vertically mounted	R_{thra}	10K/W		@ $\Delta T_{ra}=75^\circ C$
	Heatsink thermal time constant	T_{thra}	10 minutes		@ $\Delta T_{ra}=60^\circ C$
	Control inputs / power outputs / case insulation voltage	U_{imp}	4kV		
	Isolation resistance / capacitance	R_{io} / C_{io}	1GΩ / <8pF		
	Maximum junction temperature	T_{jmax}	Steady state = 125°C	Transient = 175°C	
	Storage ambient temperature	T_{stg}	-40->+100°C		
	Operating ambient temperature	T_{amb}	-40->+90°C		See fig. 9
	Max. case temperature	T_c	100°C		

OUTPUT SWITCH CHARACTERISTIC CURVES

Fig. 5

VOLTAGE DROP VS LOAD CURRENT

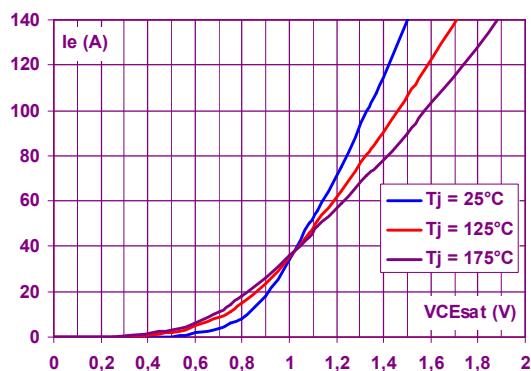


Fig. 6

REVERSE VOLTAGE DROP VS REVERSE CURRENT

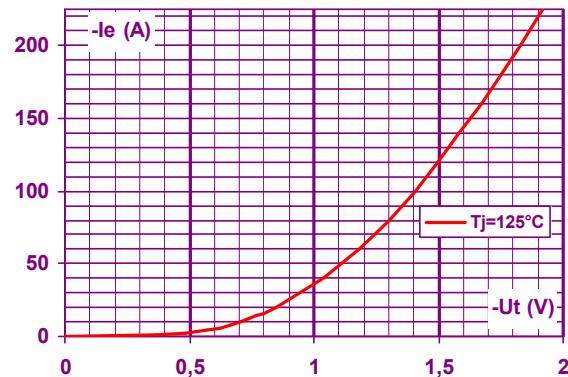


Fig. 7

POWER ELEMENT TRANSIENT THERMAL IMPEDANCE vs. PULSE DURATION

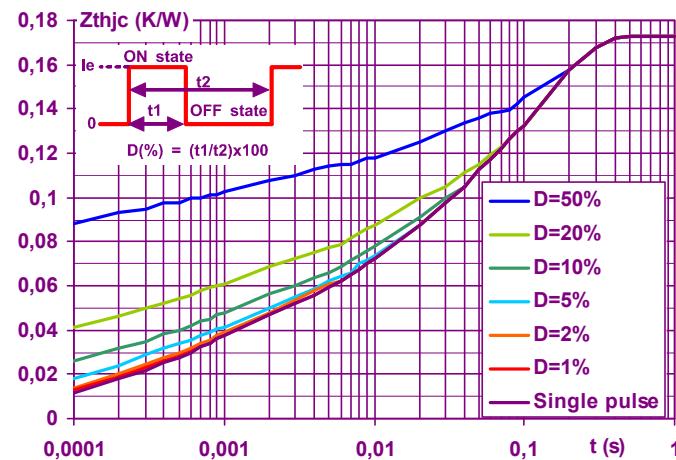


Fig. 8

ON-STATE PEAK OVERLOAD CURRENT vs. PULSE DURATION

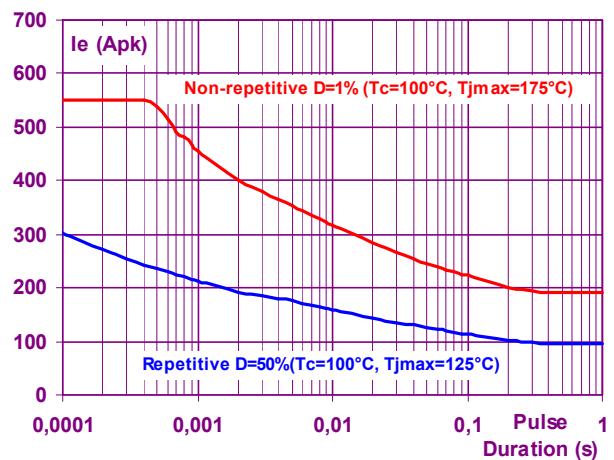



Fig. 9

POWER DISSIPATED AND LOAD CURRENT LIMIT VS TEMPERATURE

Permanent current
I_e (ARMS)

Please refer to the installation notice for precautions
about mounting the device on a heatsink.

Power dissipated
P_d (W)

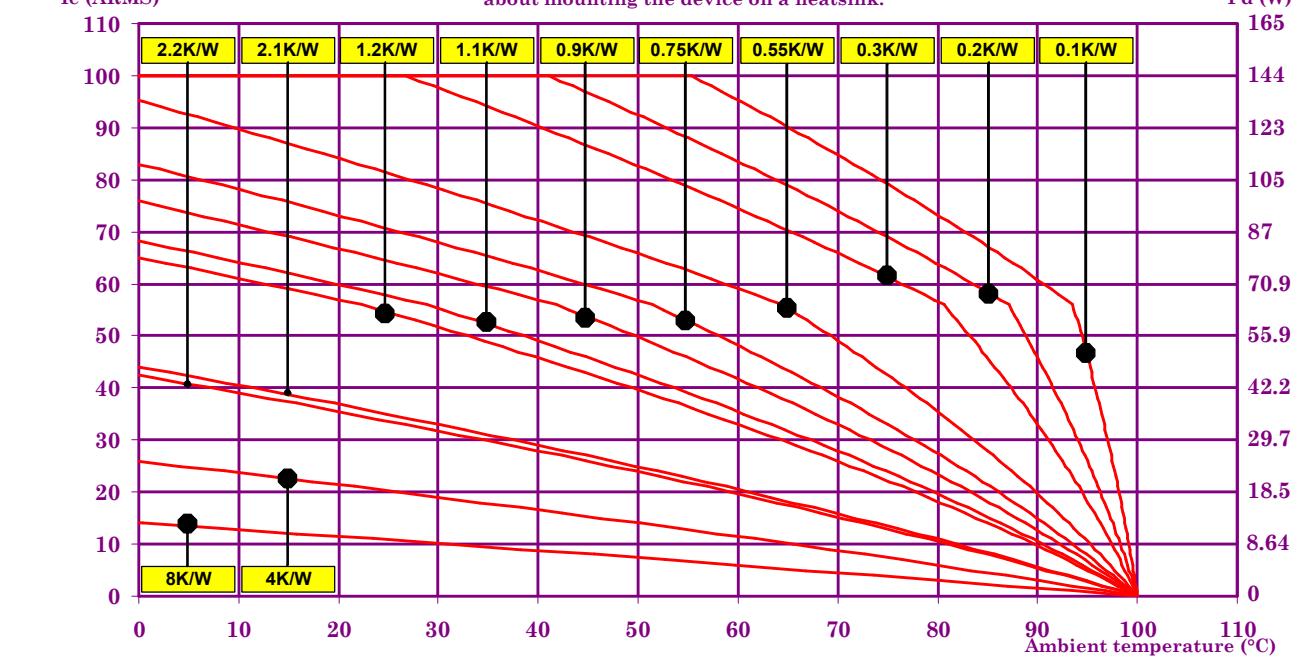

10K/W = No Heatsink / 1LD12020

2.1K/W = WF210000

0.55K/W = WF050000

4K/W = 150x150x3mm aluminium sheet

1.2K/W = WF121000

0.3K/W = WF031100

1.1K/W = WF131100

0.2K/W = No reference

2.2K/W = WF262100 / WF151200

0.9K/W = WF115100

0.1K/W = No reference

0.75K/W = WF070000

GENERAL INFORMATION

CONNEC- TIONS	Connections		Power	Control	
	Screwdriver advised		Philips™ NR2	Philips™ NR1	
	Min and max tightening torque		1.8 N.m	0.8 N.m	
	Insulated crimp terminals (round tabs, eyelet type)		M5	M3	

MISC.	Display		Green LED (indicates the power element is controlled)	
	Housing		UL94V0	
	Mounting		2 screws (M4x12mm)	See mounting sheet
	Noise level		No audible noise	
	Weight		100g	

STANDARDS

GENERAL	Standards		IEC60947-1	
	Protection level		IP00	
	Protection against direct touch		None	
	CE marking		Yes	
	UL, cULUS and VDE approvals		Pending	


E.M.C. IMMUNITY	TYPE OF TEST	STANDARD	LEVEL	EFFECT
	E.S.D. (Electrostatic discharges)	EN61000-4-2	Pending	?
	Radiated electromagnetic fields	EN61000-4-3	Pending	?
	Fast transients bursts	EN61000-4-4	Pending	?
	Electric chocks	EN61000-4-5	Pending	?
	Voltage drop	EN61000-4-11	-	

E.M.C. EMISSION	Radiated and conducted disturbances	NFEN55011	Pending	


DIMENSIONS AND ACCESSORIES

Fig.
10

DIMENSIONS (mm)

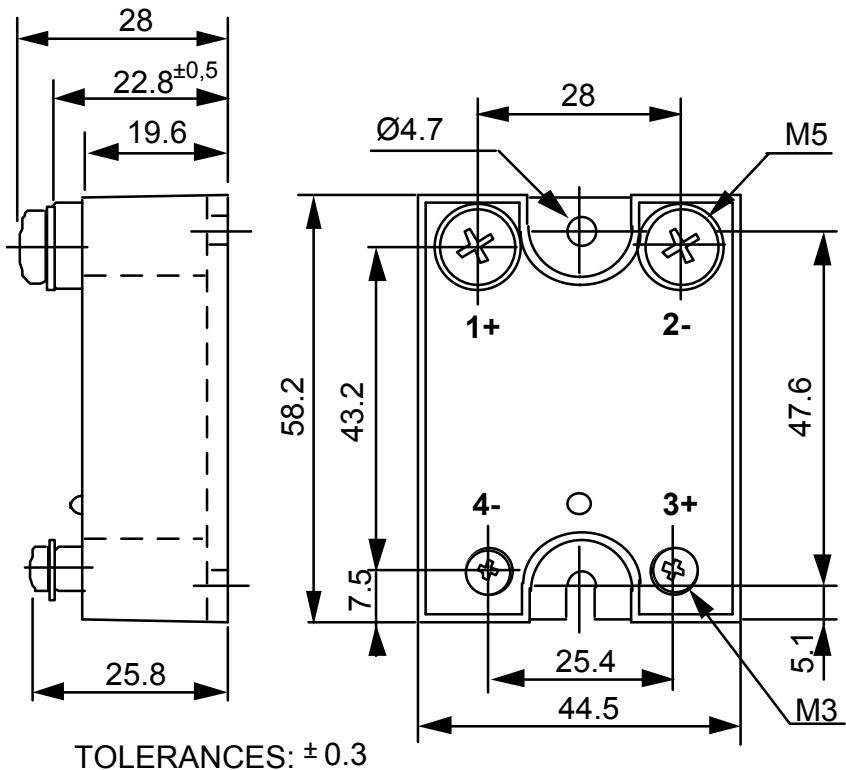

ACCESSORIES

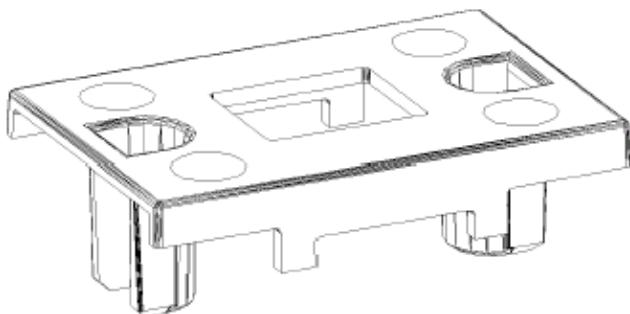PROTECTIVE COVER
1K470000

Please consult our website for other accessory references
(Heatsinks, mounting adaptors, thermal grease...)

ISO 9001
N° 1993/1106aASSOCIATION
FRANÇAISE POUR
L'ASSURANCE DE
LA QUALITÉcelduc®
relais

www.celduc.com

5, rue Ampère B.P. 30004 42290 SORBIERS - France

Phone : 33 (0) 4 77 53 90 20 Fax : 33 (0) 4 77 53 85 51 Email : celduc-relais@celduc.com