

## MOSFET BASED DC SOLID STATE RELAY



- ▶ Latest MOSFET technology generation.
- ▶ Ultra low on-state resistance.
- ▶ New innovative isolated driver ensuring fast power transistor turn on and off therefore low power transient.
- ▶ Ultra low output leakage current
- ▶ Low control current consumption
- ▶ Triggered control input to avoid linear control risks
- ▶ Low conducted and radiated disturbances

SCM030200



Control voltage range	4.5-32VDC
Max. output peak voltage	200VDC
Nom. load current with heatsink	30ADC

Load voltage range	Load current range	Control input voltage range	In & case / Out Insulation	Connections	Dimensions (WxHxD)	Weight
Depends on protection clamping voltage	0 to 30A (with heatsink)	4.5-32VDC	4kV	M3 round tabs M5 round tabs	44.5 x 58.2 x 27 (mm)	100g

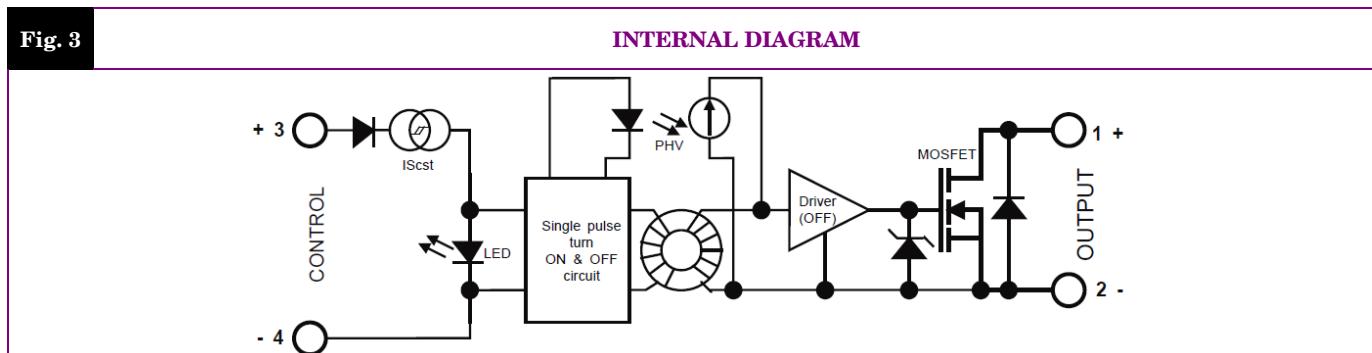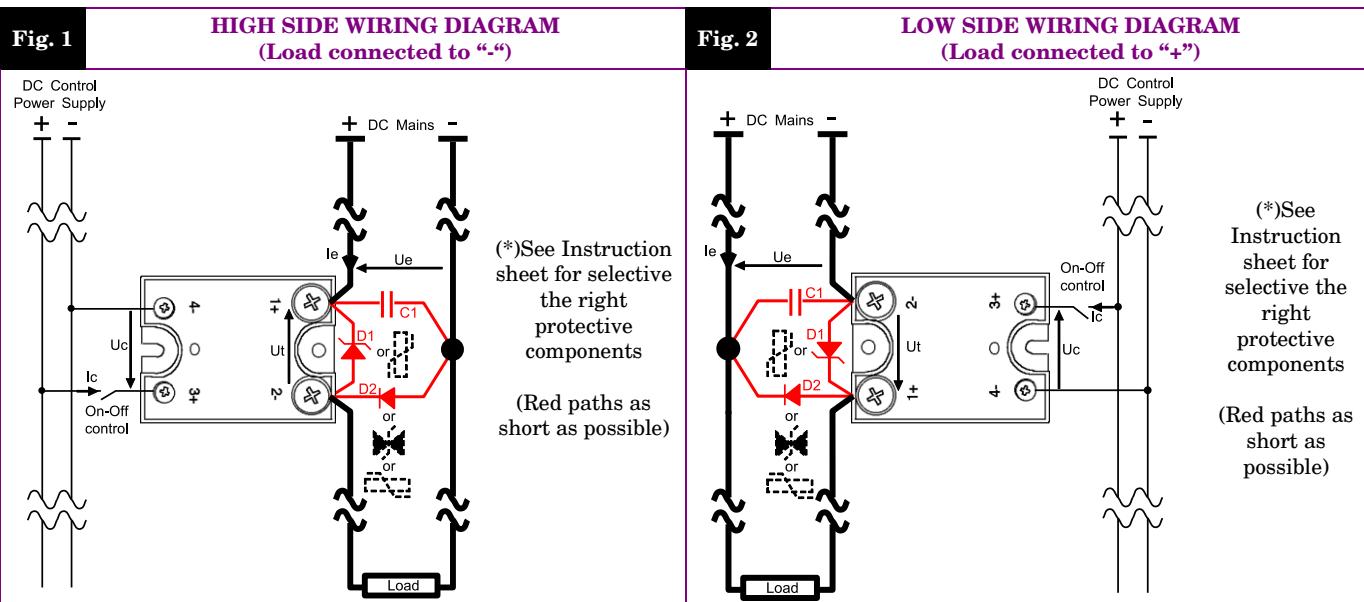

Proud to serve you

**CONTROL INPUT CHARACTERISTICS**

<b>INPUT CIRCUIT</b>	<b>CHARACTERISTIC</b>	<b>LABEL</b>	<b>VALUE</b>	<b>INFO.</b>
	Control voltage range	<b>Uc</b>	4.5 – 32VDC	
	Current consumption	<b>Ic</b>	25 – 42mAADC for control voltage range	<b>See fig. 5</b>
	Typical turn on voltage	<b>Ucontyp</b>	4.3V	
	Min. releasing voltage	<b>Ucoffmin</b>	1VDC	
	Typical releasing voltage	<b>Ucofftyp</b>	3.5V	
	Max. input voltage	<b>Ucmax</b>	32VDC	
	Max. reverse voltage	<b>-Ucmax</b>	32VDC	
	Max. reverse leakage current	<b>-Icmax</b>	100µA	
	Input impedance	<b>Re</b>	Current limitation	<b>See fig. 5</b>


**POWER OUTPUT CHARACTERISTICS**

<b>POWER CIRCUIT</b>	<b>CHARACTERISTIC</b>	<b>LABEL</b>	<b>VALUE</b>	<b>INFO.</b>				
	Mains voltage range	<b>Ue</b>	Depends on protection clamping voltage					
	Non-repetitive peak voltage	<b>Utp</b>	200V					
	Overvoltage protection	<b>D1</b>	Not integrated A voltage clamping mean must be connected across the terminals 1 & 2 (see fig 1 & 2)	See Instruction sheet for selective the right protective components				
	Reverse voltage (internal diode)	<b>-Ut</b>	1,5V	@Ie=-30A @Uc=0				
	Max. repetitive avalanche current	<b>Iep</b>	18A	Pulse width limited by Tj max				
	Max. single pulse avalanche energy	<b>Eep</b>	315mJ	@Ut=50V @Ie=Iep				
	Max. repetitive pulse avalanche energy	<b>Eep</b>	20mJ	@Ie=30A				
	Maximum nominal currents	<b>Ie</b>	<table border="1"> <tr> <td><b>Resistive</b></td> <td><b>Motor</b></td> </tr> <tr> <td>30A</td> <td>Please consult us</td> </tr> </table>	<b>Resistive</b>	<b>Motor</b>	30A	Please consult us	See fig. 7 for limits Values with heatsink
<b>Resistive</b>	<b>Motor</b>							
30A	Please consult us							
	Non-repetitive peak overload current	<b>Iepeak</b>	120A @Ut=7VDC during 1ms	See fig. 8				
	Min. load current	<b>Iemin</b>	0mA					
	Max. leakage current	<b>Ielk</b>	100µADC	@Utp @Tjmax				
	Max. on-state resistance	<b>RDSon</b>	164mΩ	@Iemax @Tjmax				
	Typ. output capacitance	<b>Cout</b>	3nF (Ut=1V 1MHz)	Uc=0				
	Junction/case thermal resistance per power element	<b>Rthjc</b>	0.75K/W	Total = 1 power element				
	Built-in heatsink thermal resistance vertically mounted	<b>Rthra</b>	8K/W	@ΔTra=60°C				
	Heatsink thermal time constant	<b>Tthra</b>	10min	@ΔTra=60°C				
	Control inputs/power outputs insulation voltage	<b>Uimp</b>	4kV					
	Inputs/case insulation voltage	<b>Uimp</b>	4kV					
	Outputs/case insulation voltage	<b>Uimp</b>	4kV					
	Isolation resistance	<b>Rio</b>	1GΩ					
	Isolation capacitance	<b>Cio</b>	<8pF					
	Maximum junction temperature	<b>Tjmax</b>	175°C					
	Storage ambient temperature	<b>Tstg</b>	-40->+100°C					
	Operating ambient temperature	<b>Tamb</b>	-40->+90°C	See fig. 7				
	Max. case temperature	<b>Tc</b>	100°C					

## TIME CHARACTERISTICS

Fig. 4

TIME DIAGRAMS

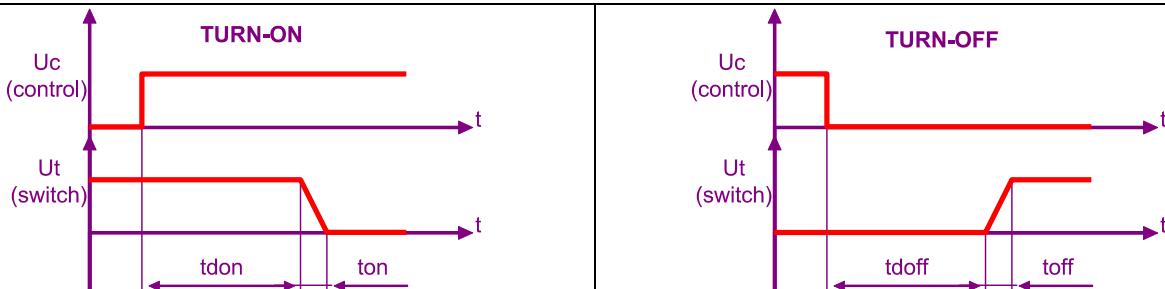

TIME CHARACT.	CHARACTERISTIC	LABEL	VALUE	INFO.
	Turn on time	<b>ton</b>	10µs (1.2µs typical)	
	Turn on delay	<b>t<sub>don</sub></b>	600µs (500µs typical)	
	Turn off time	<b>t<sub>off</sub></b>	10µs (1µs typical)	
	Turn off delay	<b>t<sub>dooff</sub></b>	100µs (60µs typical)	
	Max. On-Off frequency	<b>F<sub>(on-off)</sub></b>	700Hz	

## GENERAL INFORMATION

CONNEX-	Connections	Power	Control
	Screwdriver advised	Philips™ NR2	Philips™ NR1
	Min and max tightening torque	1.8 N.m	0.8 N.m
	Insulated crimp terminals (round tabs, eyelet type)	M5	M3
MISC.	Display	Green LED (indicates relay has switched ON)	
	Housing	UL94V0	
	Mounting	2 screws (M4x12mm)	See mounting sheet
	Noise level	No audible noise	
	Weight	100g	

## STANDARDS

GENERAL	Standards	IEC60947-1
	Protection level	IP00
	Protection against direct touch	None
	CE marking	Yes
	UL, cULUS and VDE approvals	Pending

E.M.C. IMMUNITY	TYPE OF TEST	STANDARD	LEVEL	EFFECT
	E.S.D. (Electrostatic discharges)	EN61000-4-2	Pending	
	Radiated electromagnetic fields	EN61000-4-3	Pending	
	Fast transients bursts	EN61000-4-4	4kV coupling by clamp on the input side (power side to be tested)	No effect
	Electric shocks	EN61000-4-5	1kV direct coupling on control side (pending on power side)	No effect
	Voltage drop	EN61000-4-11	-	

E.M.C. EMISSION	Radiated and conducted disturbances	NFEN55011	Pending	
--------------------	-------------------------------------	-----------	---------	--

## CHARACTERISTIC CURVES

Fig. 5

INPUT CHARACTERISTIC

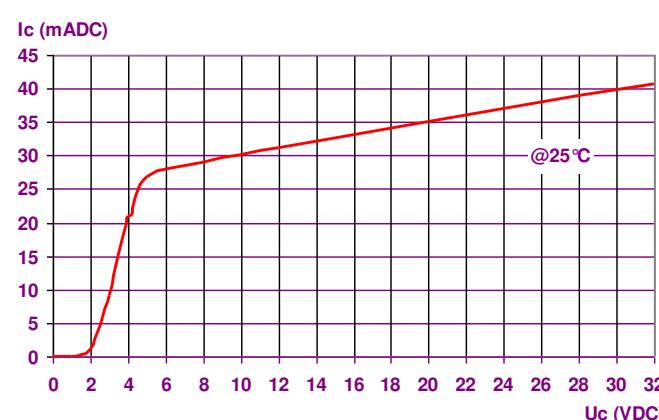


Fig. 6

ON RESISTANCE VS TEMPERATURE


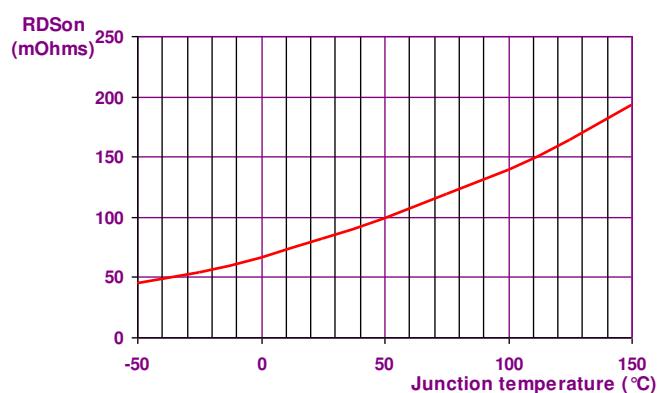


Fig. 7

POWER DISSIPATED AND LOAD CURRENT LIMIT VS TEMPERATURE

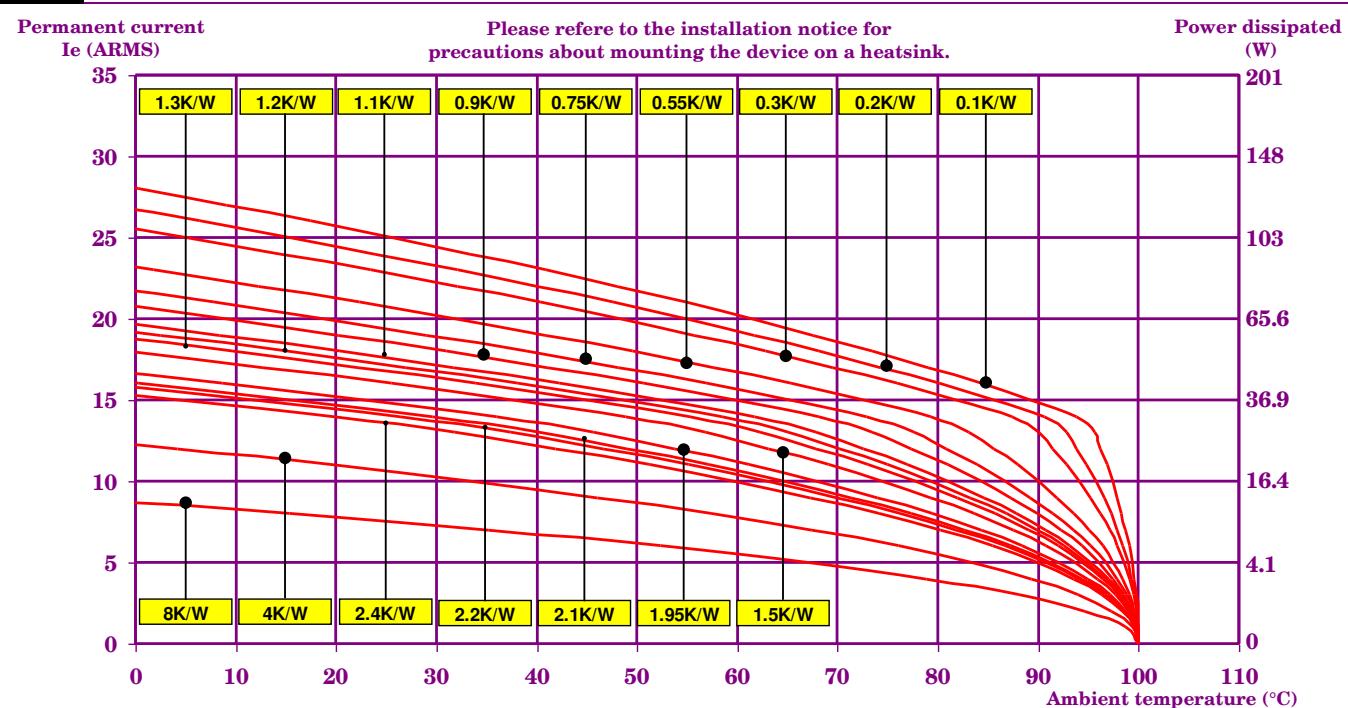

8K/W = No Heatsink  
2.1K/W = WF210000  
1.1K/W = WF131100  
0.3K/W = WF031100

4K/W = No reference  
1.95K/W = WF191100  
0.9K/W = WF092000


2.4K/W = WF152100  
1.5K/W = WF141100  
0.9K/W = WF115100

2.2K/W = WF262100  
1.3K/W = WF129100  
0.7K/W = WF070000

2.2K/W = WF151200  
1.2K/W = WF121000  
0.55K/W = WF050000

Fig. 8


CURRENT OVERLOAD CHARACTERISTIC

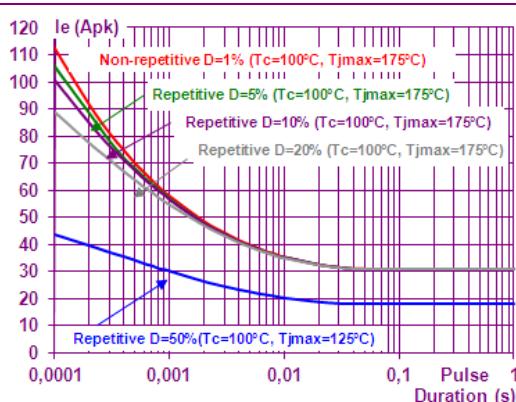


## DIMENSIONS AND ACCESSORIES

Fig. 9

## DIMENSIONS

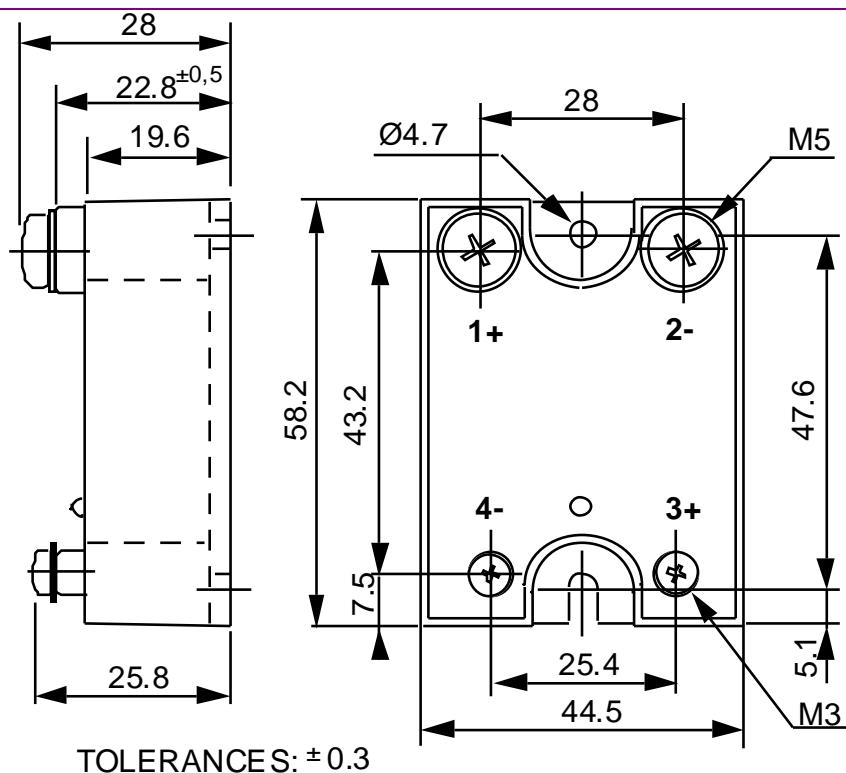Fig.  
10

## ACCESSORIES

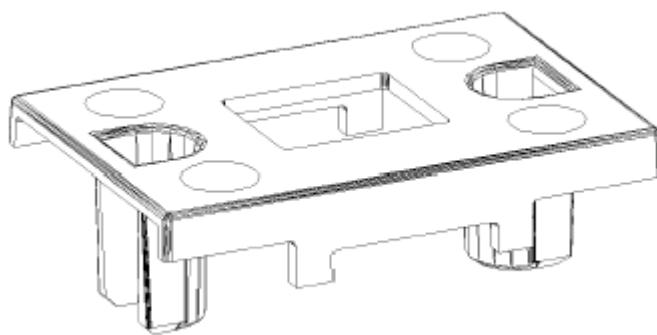

PROTECTIVE COVER 1K470000