

## MOSFET BASED DC SOLID STATE RELAY

- ▶ Latest MOSFET technology generation.
- ▶ Ultra low on-state resistance.
- ▶ New innovative isolated driver ensuring fast power transistor turn on and off therefore low power transient.
- ▶ Ultra low output leakage current
- ▶ Low control current consumption
- ▶ Triggered control input to avoid linear control risks
- ▶ Low conducted and radiated disturbances

SCM040600



Control voltage range	4.5-32VDC
Max. output peak voltage	600VDC
Nom. load current with heatsink	40ADC

Load voltage range	Load current range	Control input voltage range	In & case / Out Insulation	Connections	Dimensions (WxHxD)	Weight
Depends on protection clamping voltage	0 to 40A (with heatsink)	4.5-32VDC	4kV	M3 round tabs M5 round tabs	44.5 x 58.2 x 27 (mm)	100g

Fig. 1


HIGH SIDE WIRING DIAGRAM  
(Load connected to “-“)

Fig. 2



LOW SIDE WIRING DIAGRAM  
(Load connected to “+“)

Fig. 3

INTERNAL DIAGRAM

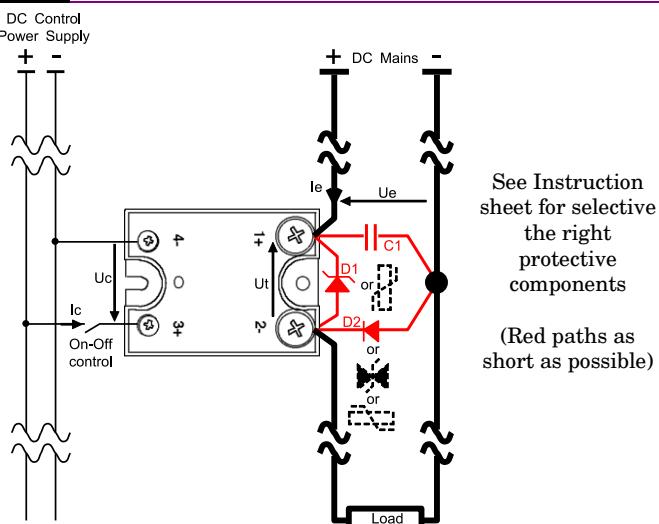

Proud to serve you

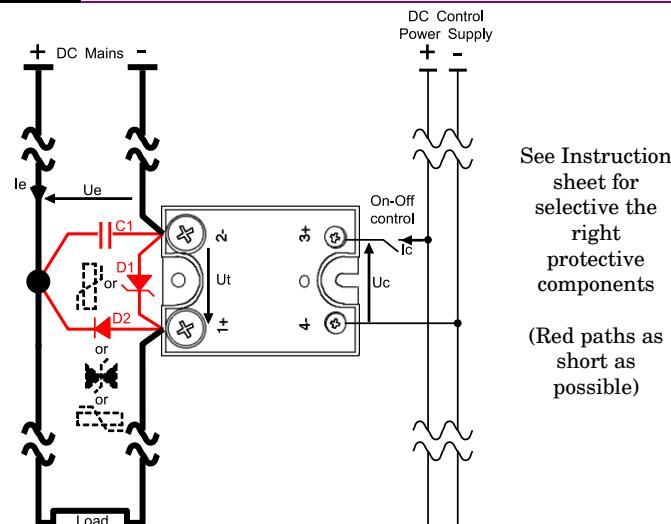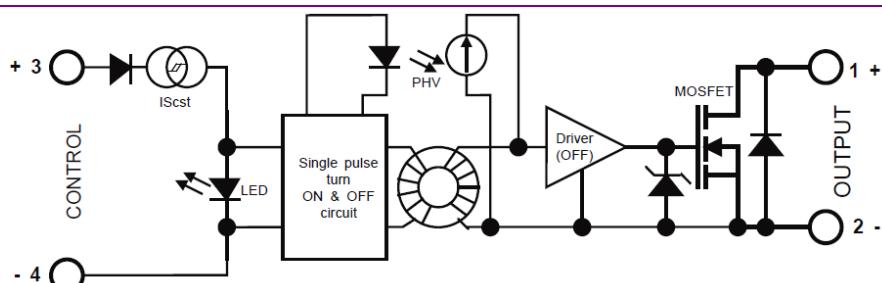**CONTROL INPUT CHARACTERISTICS**

<b>INPUT CIRCUIT</b>	<b>CHARACTERISTIC</b>	<b>LABEL</b>	<b>VALUE</b>	<b>INFO.</b>
	<b>Control voltage range</b>	<b>Uc</b>	4.5 – 32VDC	
	<b>Current consumption</b>	<b>Ic</b>	25 – 42mAADC for control voltage range	<b>See fig. 5</b>
	<b>Typical turn on voltage</b>	<b>Ucontyp</b>	4.3V	
	<b>Min. releasing voltage</b>	<b>Ucoffmin</b>	1VDC	
	<b>Typical releasing voltage</b>	<b>Ucofftyp</b>	3.5V	
	<b>Max. input voltage</b>	<b>Ucmax</b>	32VDC	
	<b>Max. reverse voltage</b>	<b>-Ucmax</b>	32VDC	
	<b>Max. reverse leakage current</b>	<b>-Icmax</b>	100µA	
	<b>Input impedance</b>	<b>Re</b>	Current limitation	<b>See fig. 5</b>


**POWER OUTPUT CHARACTERISTICS**

<b>POWER CIRCUIT</b>	<b>CHARACTERISTIC</b>	<b>LABEL</b>	<b>VALUE</b>	<b>INFO.</b>
	<b>Mains voltage range</b>	<b>Ue</b>	<b>Depends on protection clamping voltage (D1)</b>	
	<b>Non-repetitive peak voltage</b>	<b>Utp</b>	600V	
	<b>Overvoltage protection</b>	<b>D1</b>	Not integrated A voltage clamping mean must be connected across the terminals 1 & 2 (see fig 1 & 2)	See Instruction sheet for selective the right protective components
	<b>Reverse voltage (internal diode)</b>	<b>-Ut</b>	1,2V	@Ic=-47A @Uc=0
	<b>Max. repetitive avalanche current</b>	<b>Iep</b>	20A	Pulse width limited by Tj max
	<b>Max. single pulse avalanche energy</b>	<b>Eep</b>	1800mJ	@Ut=50V @Ie=10A
	<b>Max. repetitive pulse avalanche energy</b>	<b>Eep</b>	1mJ	@Ie=20A
	<b>Maximum nominal currents</b>	<b>Ie</b>	<b>Resistive</b>	<b>Motor</b>
			40A	Please consult us
	<b>Non-repetitive peak overload current</b>	<b>Iepeak</b>	140A	<b>See fig. 8</b>
	<b>Min. load current</b>	<b>Iemin</b>	0mA	
	<b>Max. leakage current</b>	<b>Ielk</b>	250µADC	@Utp @Tjmax
	<b>Max. on-state resistance</b>	<b>RDSon</b>	140mΩ	@Iemax @Tjmax
	<b>Typ. output capacitance</b>	<b>Cout</b>	2.2nF	
	<b>Junction/case thermal resistance per power element</b>	<b>Rthjc</b>	0.4K/W	Total = 1 power elements
	<b>Built-in heatsink thermal resistance vertically mounted</b>	<b>Rthra</b>	8K/W	@ΔTra=60°C
	<b>Heatsink thermal time constant</b>	<b>Tthra</b>	10min	@ΔTra=60°C
	<b>Control inputs/power outputs insulation voltage</b>	<b>Uimp</b>	4kV	
	<b>Inputs/case insulation voltage</b>	<b>Uimp</b>	4kV	
	<b>Outputs/case insulation voltage</b>	<b>Uimp</b>	4kV	
	<b>Isolation resistance</b>	<b>Rio</b>	1GΩ	
	<b>Isolation capacitance</b>	<b>Cio</b>	<8pF	
	<b>Maximum junction temperature</b>	<b>Tjmax</b>	150°C	
	<b>Storage ambient temperature</b>	<b>Tstg</b>	-40->+100°C	
	<b>Operating ambient temperature</b>	<b>Tamb</b>	-40->+90°C	<b>See fig. 7</b>
	<b>Max. case temperature</b>	<b>Tc</b>	100°C	

## TIME CHARACTERISTICS

Fig. 4

## TIME DIAGRAMS

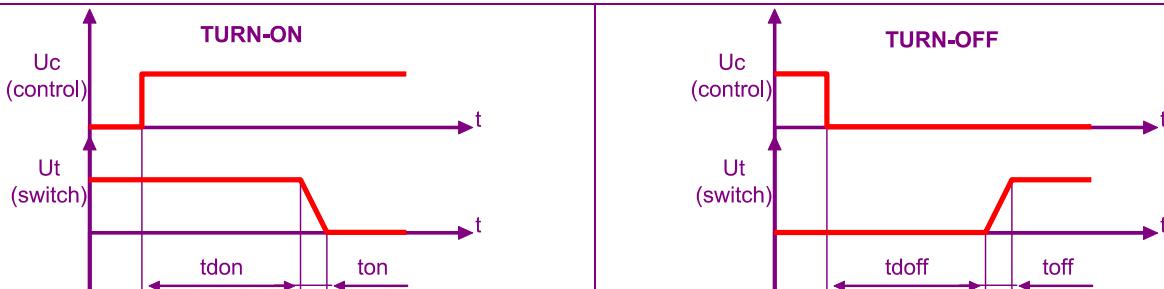

TIME CHARACT.	CHARACTERISTIC	LABEL	VALUE	INFO.
	Turn on time	ton	10µs (1.2µs typical)	
	Turn on delay	tdon	600µs (500µs typical)	
	Turn off time	toff	10µs (1µs typical)	
	Turn off delay	tdoff	100µs (60µs typical)	
	Max. On-Off frequency	F(on-off)	700Hz	

## GENERAL INFORMATION

CONNEX-	Connections	Power	Control
	Screwdriver advised	Philips™ NR2	Philips™ NR1
	Min and max tightening torque	1.8 N.m	0.8 N.m
	Insulated crimp terminals (round tabs, eyelet type)	M5	M3

MISC.	Display	Green LED (indicates relay has switched ON)	
	Housing	UL94V0	
	Mounting	2 screws (M4x12mm)	See mounting sheet
	Noise level	No audible noise	
	Weight	100g	

## STANDARDS

GENERAL	Standards	IEC60947-1	
	Protection level	IP00	
	Protection against direct touch	None	
	CE marking	Yes	
	UL, cULUS and VDE approvals	Pending	

E.M.C. IMMUNITY	TYPE OF TEST	STANDARD	LEVEL	EFFECT
	E.S.D. (Electrostatic discharges)	EN61000-4-2	Pending	?
	Radiated electromagnetic fields	EN61000-4-3	Pending	?
	Fast transients bursts	EN61000-4-4	4kV coupling by clamp on the input side and direct for power side	No effect
	Electric shocks	EN61000-4-5	1kV direct coupling on the input side (pending for power side)	?
	Voltage drop	EN61000-4-11	-	

E.M.C. EMISSION	Radiated and conducted disturbances	NFEN55011	Pending	
--------------------	-------------------------------------	-----------	---------	--

## CHARACTERISTIC CURVES

Fig. 5

INPUT CHARACTERISTIC

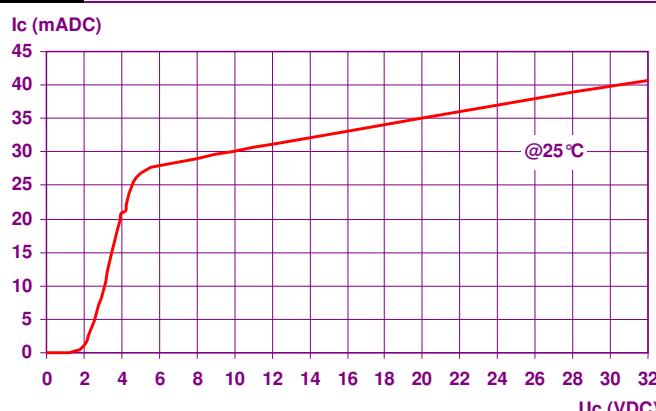


Fig. 6

ON RESISTANCE VS TEMPERATURE


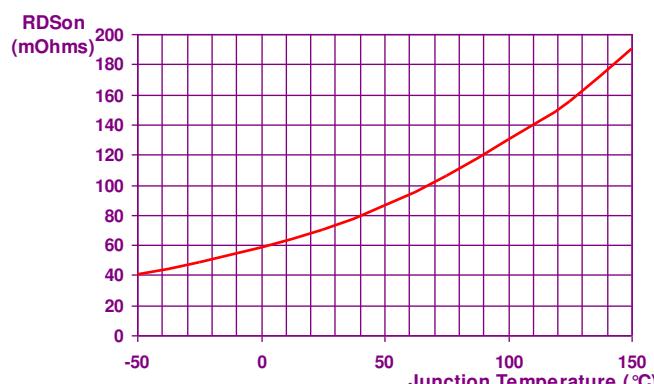


Fig. 7

POWER DISSIPATED AND LOAD CURRENT LIMIT VS TEMPERATURE

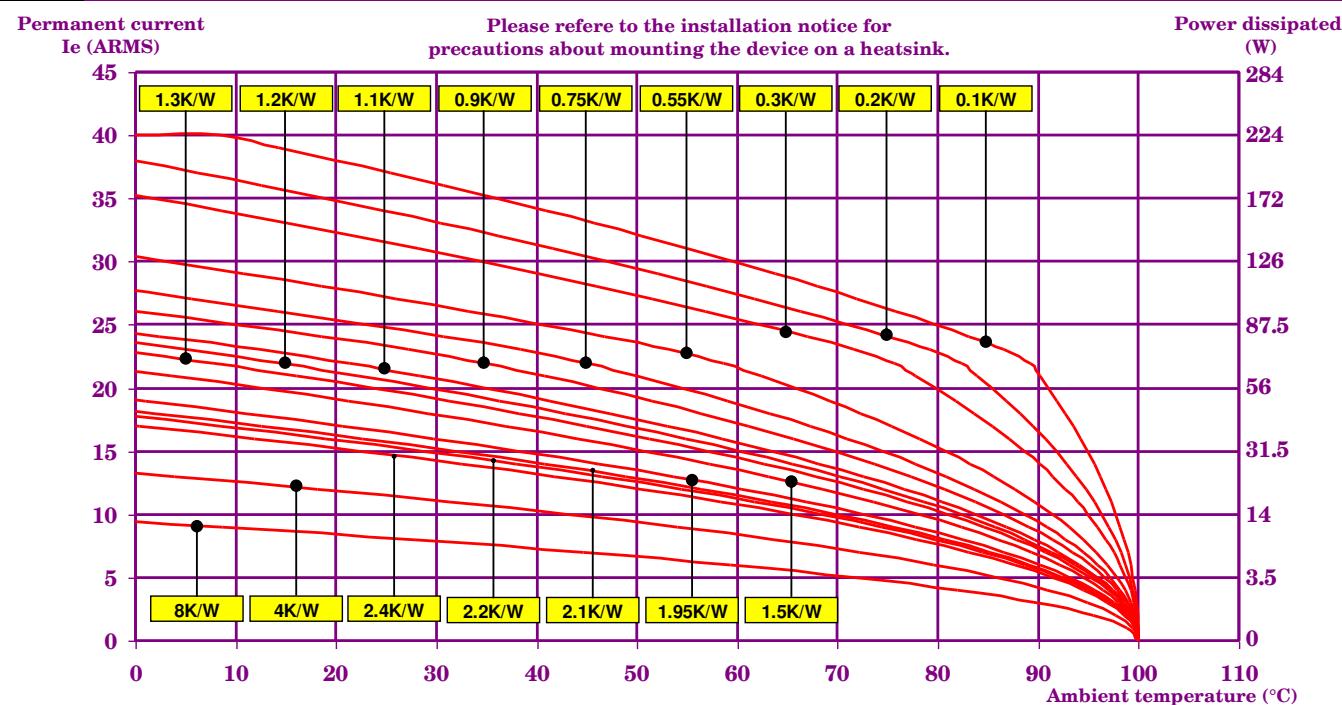

8K/W = No Heatsink  
2.1K/W = WF210000  
1.1K/W = WF131100  
0.3K/W = WF031100



4K/W = No reference  
1.95K/W = WF191100  
0.9K/W = WF092000  
0.2K/W = WF020000

2.4K/W = WF152100  
1.5K/W = WF141100  
0.9K/W = WF115100  
0.1K/W = No reference

2.2K/W = WF262100  
1.3K/W = WF129100  
0.7K/W = WF070000  
0.55K/W = WF050000

Fig. 8


CURRENT OVERLOAD CHARACTERISTIC

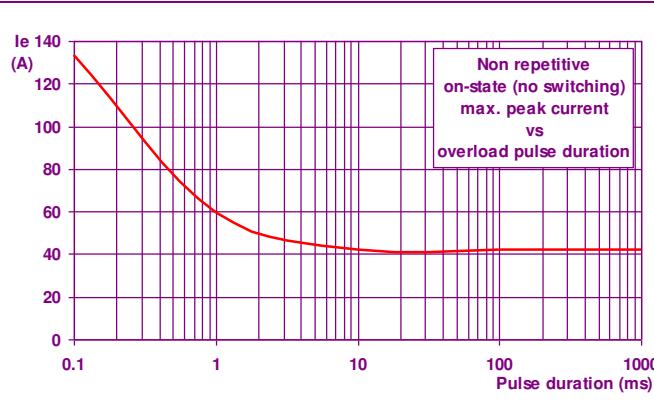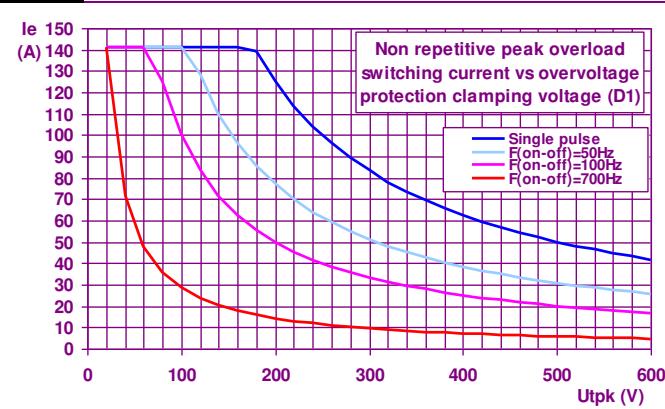


## DIMENSIONS AND ACCESSORIES

Fig. 9

## DIMENSIONS

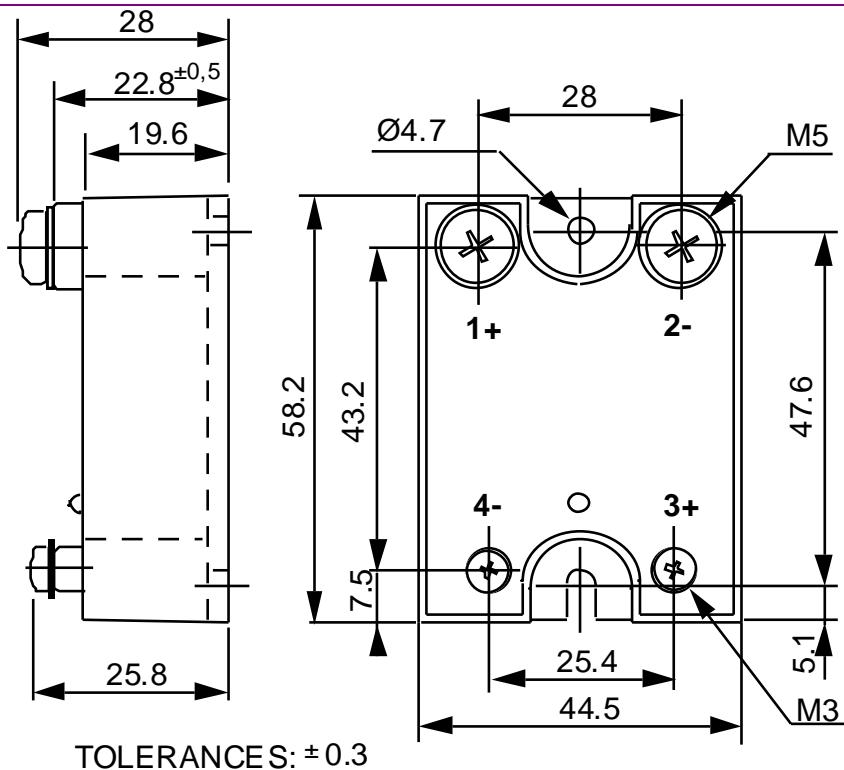Fig.  
10

## ACCESSORIES

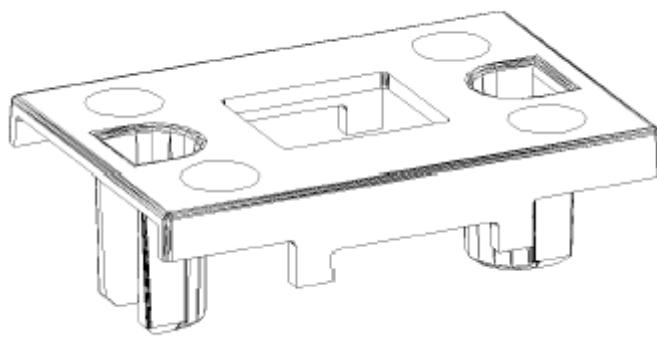

PROTECTIVE COVER 1K470000