



**PRELIMINARY DATA**

Page 1/5 UK

**MOSFET BASED  
DC SOLID-STATE RELAY**

- ▶ Latest MOSFET technology generation.
- ▶ Ultra low on-state resistance.
- ▶ Low output leakage current.
- ▶ Low control current consumption.
- ▶ Built-in overvoltage protection
- ▶ Reverse protected triggered control input to avoid linear control risks
- ▶ No radiated or conducted disturbances
- ▶ Touch protected housing IP20

**SOM040200**



|                                 |           |
|---------------------------------|-----------|
| Control voltage range           | 3.5-32VDC |
| Max. permanent output voltage   | 110VDC    |
| Max. load current with heatsink | 40ADC     |

| Load voltage range | Load current range        | Control input voltage range | In & case / Out Insulation | Connections     | Dimensions (WxHxD) | Weight |
|--------------------|---------------------------|-----------------------------|----------------------------|-----------------|--------------------|--------|
| 5-110VDC           | Up to 40A (with heatsink) | 3.5-32VDC                   | 2.5kV                      | Screw terminals | 45 x 58.5 x 30     | 80g    |

Fig. 1

**HIGH SIDE WIRING DIAGRAM**  
(Load connected to “-“)

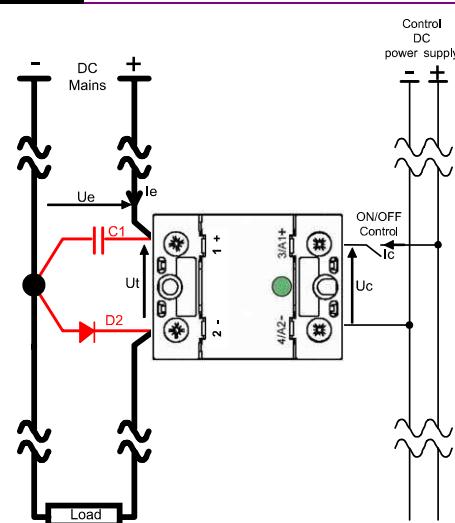


Fig. 2

**LOW SIDE WIRING DIAGRAM**  
(Load connected to “+“)


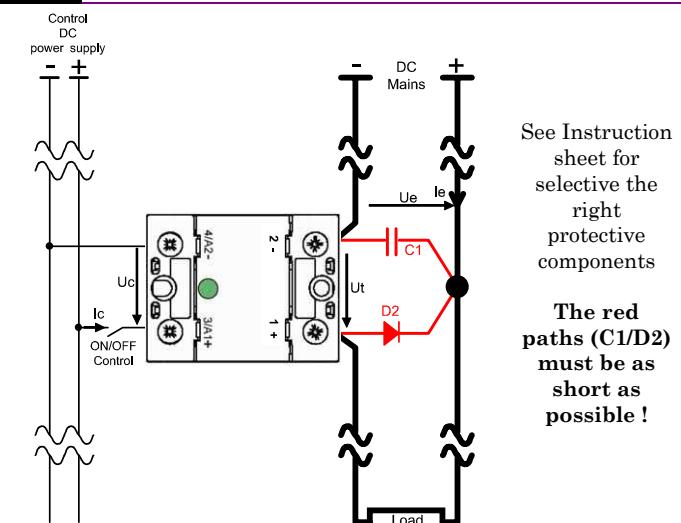


Fig. 3

**INTERNAL DIAGRAM**

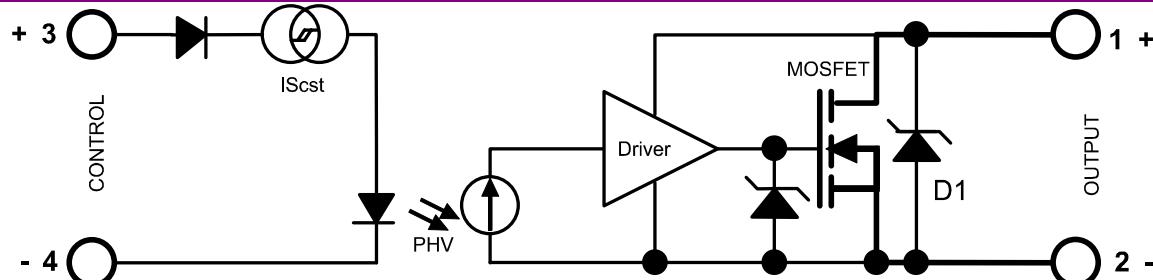

*Proud to serve you*

Data given at Tambient=25°C and subject to modification without previous notice



## PRELIMINARY DATA

Page 2/5 UK

## CONTROL INPUT CHARACTERISTICS

| INPUT CIRCUIT | CHARACTERISTIC               | LABEL    | VALUE                                    | INFO.             |
|---------------|------------------------------|----------|--|-------------------|
|               | Nom. Control voltage         | Ucnom    | 12-24VDC                                 |                   |
|               | Min. Control current         | Iemin    | 35mAADC                                  | -100µA/°C         |
|               | Control voltage range        | Ue       | 3.5 - 32VDC                              | typical ON=3.3V   |
|               | Control current consumption  | Ic       | 32 - 35mAADC (for control voltage range) | See fig. 5        |
|               | Releasing control voltage    | Ucoffmax | 1VDC                                     | typical OFF= 2.6V |
|               | Max. reverse control voltage | -Uemax   | 32VDC                                    | -Icmax<100µA      |
|               | Input impedance              | Rin      | Current limitation                       | See fig. 5        |

## POWER OUTPUT CHARACTERISTICS

| POWER CIRCUIT | CHARACTERISTIC  | LABEL    | VALUE                | INFO.                  |
|---------------|---|----------|----------------------|------------------------|
|               | Nominal voltage   | Uenom    | 90VDC                |                        |
|               | Voltage range   | Ut    Ue | 5-110VDC             |                        |
|               | Non-repetitive peak voltage                               | Utp      | 200V                 |                        |
|               | Overvoltage protection                                    | D1       | Varistor 75V size 20 |                        |
|               | Max reverse voltage drop<br>(internal diode at OFF state) | -Ut      | 1.5V                 | @Ie=-56A<br>@Uc=0      |
|               | Maximum nominal currents                                  | Ie max   | Resistive            | See fig. 7<br>(limits) |
|               |   |          | 40A                  |                        |
|               | Non-repetitive peak overload current                      | Id max   | 380A                 | See fig. 8             |
|               | Min. load current   | Iemin    | 5mA                  |                        |
|               | Max. leakage current                                      | Ielk max | 3mA                  | @Utmax @Tjmax          |
|               | Max. on-state resistance                                  | RDSon    | 46mΩ                 | @Iemax @Tjmax          |
|               | Typ. output capacitance                                   | Cout     | 1.1nF                |                        |
|               | Junction/case thermal resistance per power element        | Rthje    | 0.7K/W               |                        |
|               | Built-in heatsink thermal resistance vertically mounted   | Rthra    | 10K/W                | @ΔTra=75°C             |
|               | Heatsink thermal time constant                            | Tthra    | 10 minutes           | @ΔTra=40°C             |
|               | Control inputs/power outputs insulation voltage           | Uimp     | 2.5kV                |                        |
|               | Inputs/case insulation voltage                            | Uimp     | 2.5kV                |                        |
|               | Outputs/case insulation voltage                           | Uimp     | 2.5kV                |                        |
|               | Isolation resistance                                      | Rio      | 1GΩ                  |                        |
|               | Isolation capacitance                                     | Cio      | <8pF                 |                        |
|               | Maximum junction temperature                              | Tjmax    | 175°C                |                        |
|               | Storage ambient temperature                               | Tstg     | -40->+100°C          |                        |
|               | Operating ambient temperature                             | Tamb     | -25->+90°C           | See fig. 7             |
|               | Max. case temperature                                     | Tc       | 100°C                |                        |

## PROTECTION CHARACTERISTICS


| PROTECTION | Leakage current (Ielk) vs DC voltage (Ut)   | Absolute limits   |
|------------|---|---|
|            | <br>Ielk : Leakage current of the relay<br>Ie : User load nominal current<br>Utp : Relay max. non repetitive peak voltage | $U_{to} < U_{tp}$<br>$t_{max} = \frac{0.75}{(U_{to} - U_{t\ max}) \times I_e}$<br>$P_{(protection)} = I_e \times t_{max}$<br>$\Rightarrow \frac{(U_{to} - U_{t\ max}) \times I_e \times t}{T} \leq 1$ |
|            |   | Utmax : Max. nominal voltage of the relay<br>Uto : Possible overvoltage above Utmax<br>Utn = Ue : User DC power supply voltage<br>t : Overvoltage duration<br>T: Time between 2 overvoltages          |

**PRELIMINARY DATA**

Page 3/5 UK

**TIME CHARACTERISTICS**

Fig. 4

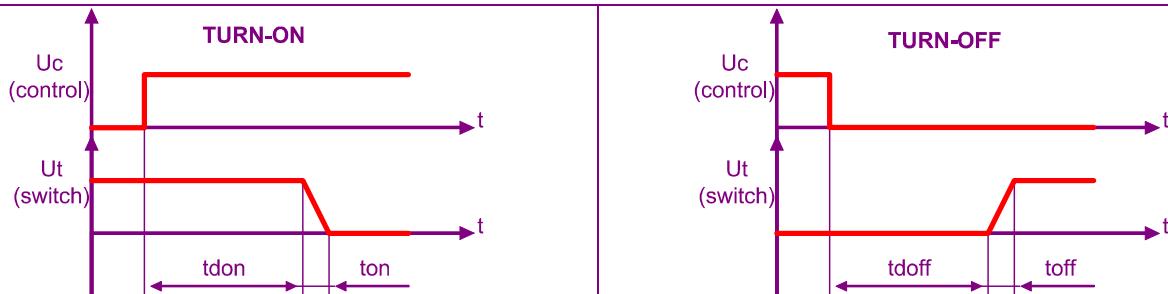**TIME DIAGRAMS**

| TIME CHARACT. | CHARACTERISTIC        | LABEL                 | VALUE   | INFO.                          |
|---------------|-----------------------|-----------------------|---|--------------------------------|
|               | Turn on time          | ton                   | 20µs  |                                |
|               | Turn on delay         | tdon                  | 20µs  |                                |
|               | Turn off time         | toff                  | 20µs  |                                |
|               | Turn off delay        | t <sub>doff</sub>     | 20µs  |                                |
|               | Max. On-Off frequency | F <sub>(on-off)</sub> | >1000Hz (for high frequency, take 2 x I <sub>e</sub> to calculate the heatsink; the protections must be chosen carefully) | Refer to the instruction sheet |

**GENERAL INFORMATION**

| CONNEX- | Connections   | Power | Control   |  |
|---------|---|-------|-----------|--|
|         | Screwdriver advised                                 |       | POZIDRIV2 |  |
|         | Min and max tightening torque                       | 2 N.m | 1.2 N.m   |  |
|         | Insulated crimp terminals (round tabs, eyelet type) | M5    | M4        |  |

|       |             |  |                    |
|-------|-------------|--|--------------------|
| MISC. | Display     | Green LED<br>(indicates relay has switched ON) |                    |
|       | Housing     | UL94V0   |                    |
|       | Mounting    | 2 screws (M4x12mm ; tightening = 1.2N.m)       | See mounting sheet |
|       | Noise level | None   |                    |
|       | Weight      | 80g  |                    |

**STANDARDS**

|         |                                 |  |            |  |
|---------|---------------------------------|--|------------|--|
| GENERAL | Standards                       |  | IEC60947-1 |  |
|         | Protection level                |  | IP20       |  |
|         | Protection against direct touch |  | Yes        |  |
|         | CE marking                      |  | Yes        |  |
|         | UL, cULUS and VDE approvals     |  | Pending    |  |

| E.M.C.<br>IMMUNITY | TYPE OF TEST                      | STANDARD     | LEVEL   | EFFECT |
|--------------------|-----------------------------------|--------------|---------|--------|
|                    | E.S.D. (Electrostatic discharges) | EN61000-4-2  | Pending | ?      |
|                    | Radiated electromagnetic fields   | EN61000-4-3  | Pending | ?      |
|                    | Fast transients bursts            | EN61000-4-4  | Pending | ?      |
|                    | Electric chocks                   | EN61000-4-5  | Pending | ?      |
|                    | Voltage drop                      | EN61000-4-11 | -       |        |

|                    |                                     |           |         |  |
|--------------------|-------------------------------------|-----------|---------|--|
| E.M.C.<br>EMISSION | Radiated and conducted disturbances | NFEN55011 | Pending |  |
|                    |                                     |           |         |  |




**PRELIMINARY DATA**

**Page 4/5 UK**

**CHARACTERISTIC CURVES**


**Fig. 5**

**INPUT CHARACTERISTIC**

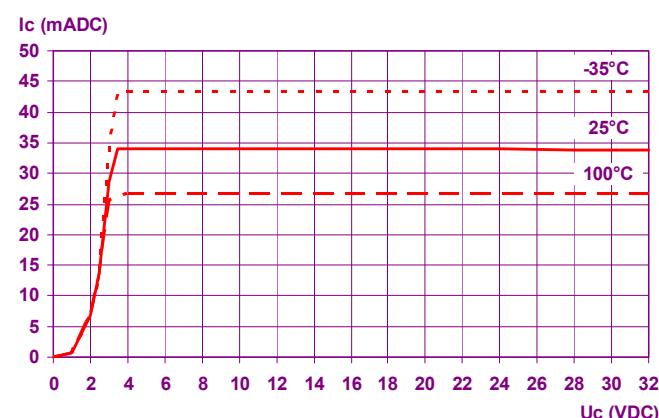

**Fig. 6**

**ON RESISTANCE VS JUNCTION TEMPERATURE**

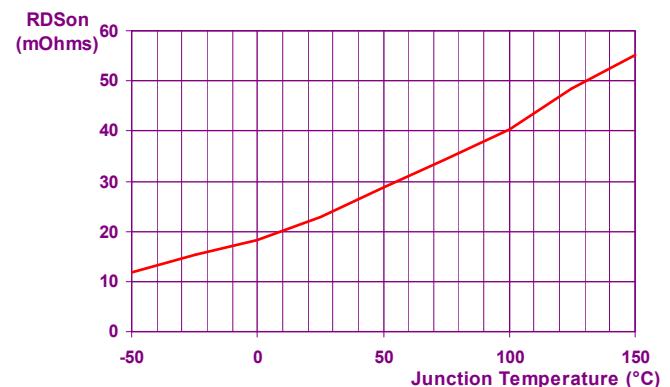


**Fig. 7**

**POWER DISSIPATED AND LOAD CURRENT LIMIT VS TEMPERATURE**

Permanent current  
Ie (ARMS)

Please refer to the installation notice for precautions  
about mounting the device on a heatsink.

Power dissipated  
(W)

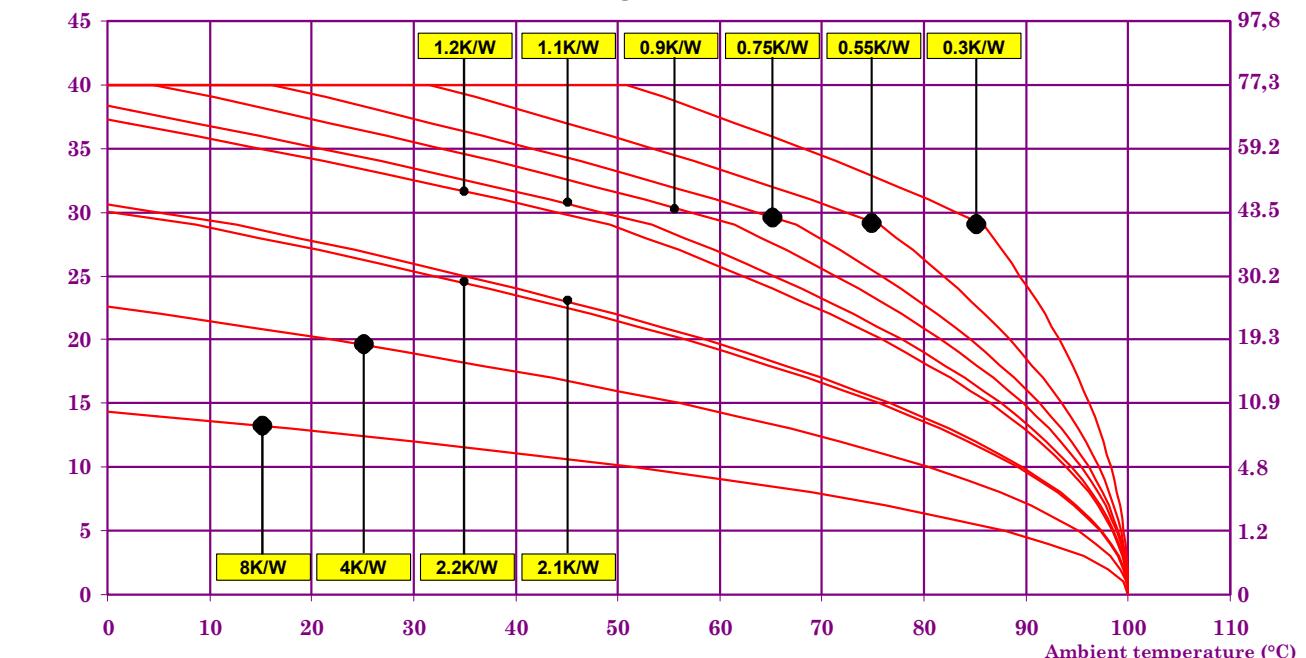

10K/W = No Heatsink  
2.1K/W = WF210000  
0.75K/W = WF070000



4K/W = 150x150x3mm aluminium sheet  
1.2K/W = WF121000  
0.55K/W = WF050000

2.2K/W = WF262100  
1.1K/W = WF131100  
0.3K/W = WF031100

2.2K/W = WF151200  
0.9K/W = WF115100

**Fig. 8**

**PEAK OVERLOAD CURRENT vs. PULSE DURATION CHARACTERISTIC**

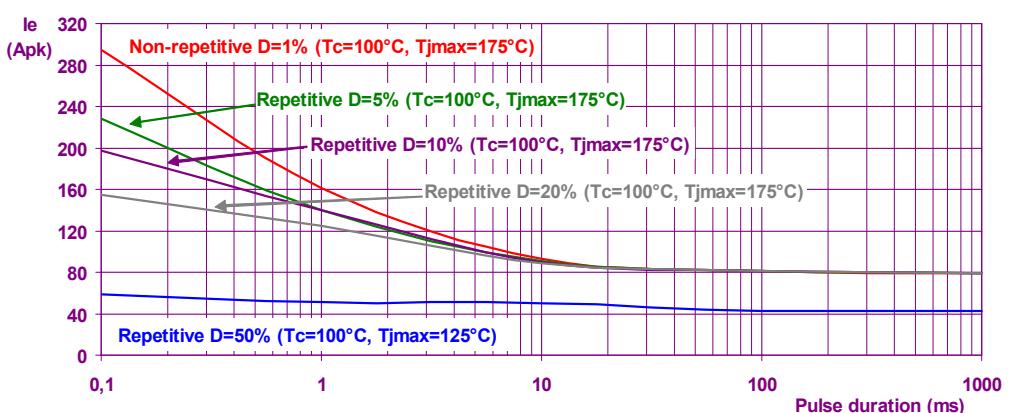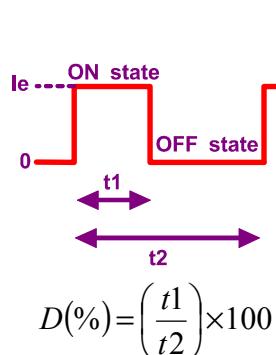

DIMENSIONS AND ACCESSORIES

Fig. 9

DIMENSIONS (mm)




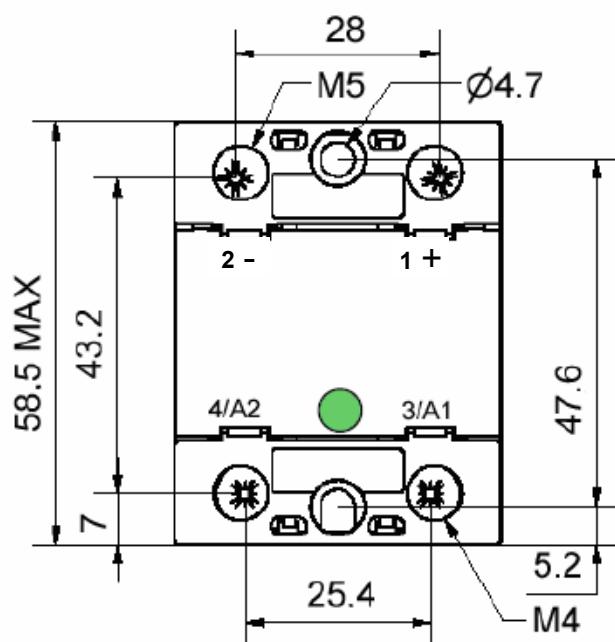


Fig.  
10

ACCESSORIES

FASTON : Please contact us

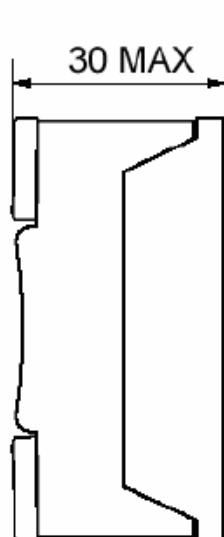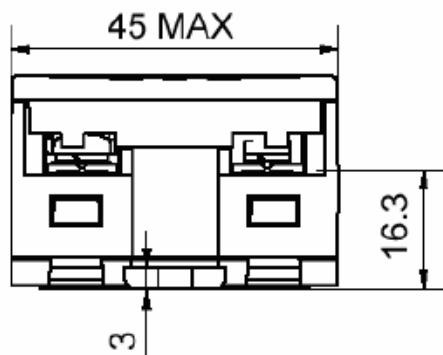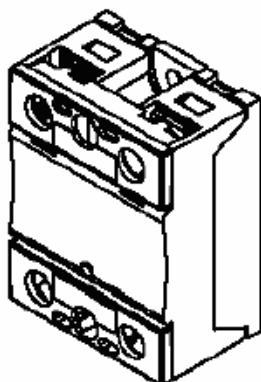