




Dimensions mm[inch]
 tolerances according to DIN ISO 2768-m
Toleranzen gem. DIN ISO 2768-m



Isometric
 Scale 1:1
Maßstab 1:1

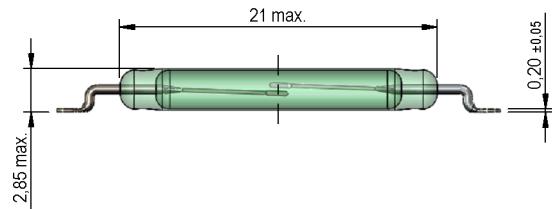


Recommended PCB Pad Layout

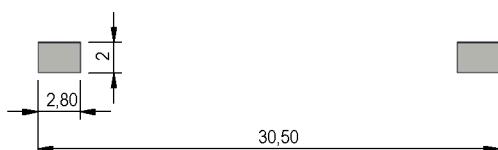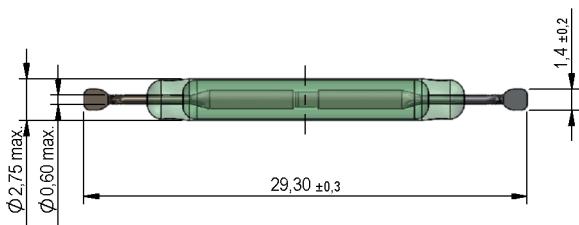


Solder Reflow Profile

Reflow soldering conditions according to JEDEC norm J-STD-020D.1

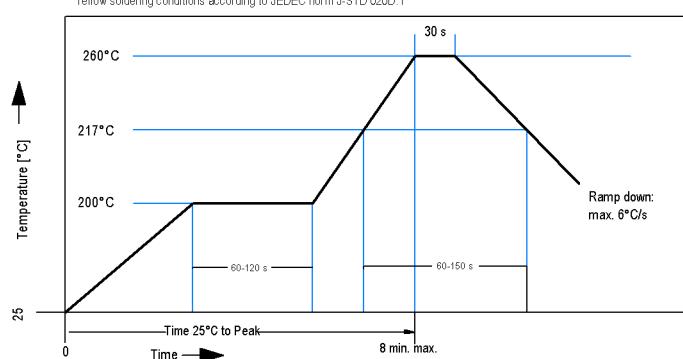

Packaging

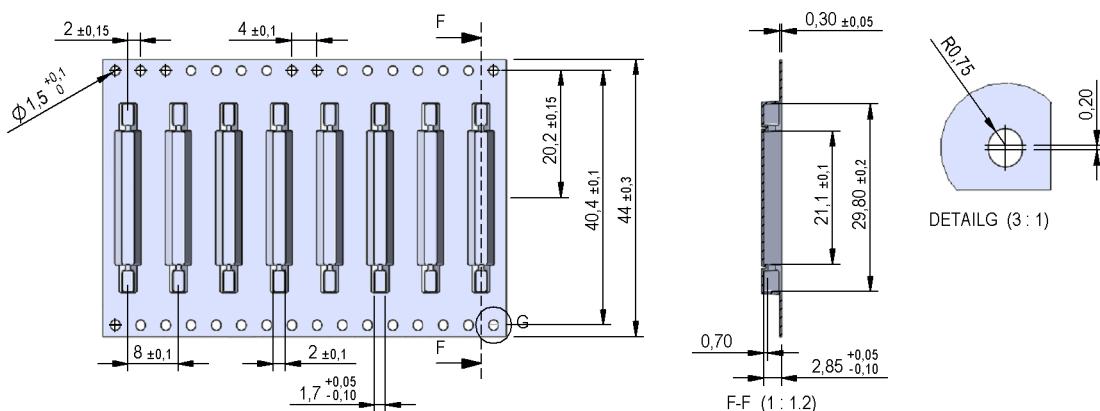

Modifications in the sense of technical progress are reserved

Designed at: 16.12.09 Designed by: AKELLER
 Last Change at: 14.08.13 Last Change by: WKOVACS

Approval at: 16.12.09 Approval by: RKAMP
 Approval at: 15.11.13 Approval by: AWEBER

Version: 05



Europe: +49 / 7731 8399 0 | Email: info@meder.com
 USA: +1 / 508 295 0771 | Email: salesusa@meder.com
 Asia: +852 / 2955 1682 | Email: salesasia@meder.com

Item No.:
9231852530
 Item:
MK23-85-E-2

Magnetic properties		Conditions	Min	Typ	Max	Unit
Pull-In excitation (Reference value)		Reed switch unmodified measured in coil- "define operation"	25		30	AT
Test-Coil		Reed switch unmodified			KMS-01	
Pull-In excitation (modified contact)		Reed switch modified phys. conditioned tolerance of +/- 1 AT	36		49	AT
Test-Coil		Reed switch modified			KMS-21	
Pull-In in milliTesla (modified conta		MS150 - phys. caused tolerance +/- 0,1mT	1,4		2,1	mT

Contact Data 85		Conditions	Min	Typ	Max	Unit
Contact-No.				85		
Contact-form				A		
Contact-material				Rhodium		
Contact rating	Any DC combination of V & A not to exceed their individual max.'s				100	W
Switching voltage	DC or Peak AC				1.000	V
Switching current	DC or Peak AC				1	A
Carry current	DC or Peak AC 100% Duty Cycle				2,5	A
Pulsed carry current	DC or Peak AC 5ms after coil excitation for 50ms max.				3	A
Contact resistance static	Measured with 40% overdrive				150	mOhm
Contact resistance dynamic	Maximum value 1,5 ms after excitation				200	mOhm
Insulation resistance	RH <45 %, 100 V test voltage	10				GOhm
Breakdown voltage (20-30 AT)	according to IEC 255-5	2.300				VDC
Operate time incl. bounce	measured with 40% overdrive				1,1	ms
Release time	measured with no coil excitation				0,1	ms
Capacitance	@ 10 kHz across open switch		0,5			pF

Environmental data		Conditions	Min	Typ	Max	Unit
Shock	1/2 sine wave duration 11ms				50	g
Vibration	from 10 - 2000 Hz				20	g
Operating temperature		-40			130	°C
Storage temperature		-55			130	°C
Soldering temperature	wave soldering max. 5 sec.				260	°C

Modifications in the sense of technical progress are reserved

Designed at: 16.12.09 Designed by: AKELLER
 Last Change at: 14.08.13 Last Change by: WKOVACS

Approval at: 16.12.09 Approval by: RKAMP
 Approval at: 15.11.13 Approval by: AWEBER

Version: 05