

ED-19 Quadrature Output Series Magnetic Encoder



- Low profile with open collector output
- Wide operational temperature range
- IP52 sealing
- Sleeve or ball bearing
- Custom housings, shafts, connectors available, in many cases without additional tooling required

DESCRIPTION

The ED-19 series magnetic encoder is designed for medium duty feedback applications. Resolutions are available from 200 to 400 counts per revolution. The magnetic technology used in the ED-19 series is plug-in compatible with existing encoder products, with the advantages of an extended temperature range and fully sealed electronics. The ED-19 suffers no LED degradation, as with conventional optical encoders, meaning it has a virtually unlimited life.

FEATURES

- Magnetic sensing technology
- Encapsulated electronics/sealed unit
- Harsh environment compatibility
- Quadrature outputs
- Low profile
- Consistent rotational torque
- Resistant to contamination
- IP52 sealing
- Metallic threaded bushing mounting
- Excellent stability – no optical degradation
- Magnetic sensing technology
- Encapsulated electronics/sealed unit

APPLICATIONS

- Marine, avionics, motor speed and position control
- Marine steering and throttle position control
- Monitor pump speed and direction
- Camera position and control
- XY stage positioning
- Motor feedback
- Medical diagnostic equipment
- Video and sound editing equipment
- Valve position
- Syringe pump
- Marine, avionics, motor speed and position control
- Marine steering and throttle position control

ED-19 Quadrature Output Series Magnetic Encoder

PERFORMANCE SPECS (NOTE1)

Quadrature outputs:

Parameters	ED-19-XX-XXXX-Q-P
Supply current	18 mA
Operating voltage (Vcc)	5 Vdc ± 0.25 Vdc
Voltage output high (min)	4.75 V
Voltage output low (max)	125 mV
Duty circle	50% ± 25%
Phase angle	90° ± 45°
Output type	Open collector with internal 10k pull-up
Standard resolutions	400, 200 counts per revolution (4 counts = 1 pulse)
Operating temperature	-40°C to +85°C

Bearing:

Parameters	ED-19-SB-XXXX-Q-P	ED-19-BB-XXXX-Q-P
Bearings	Sleeve	Ball
Maximum speed	300 RPM	3000 RPM
Bearing life	3,000,000 cycles	30,000,000 cycles

(NOTE1): All specifications are specified with Vcc @ Nominal input voltage, and Ambient Temperature 25 Degrees Celsius.

MECHANICAL

Parameters	ED-19-XX-XXXX-Q-P
Axial load (max)	20 N
Radial load (max)	10 N
Shaft end play axial (max)	0.13 mm
Shaft radial play (max)	0.25 mm (15.3 mm from thread)
Shaft push-in force	9 N
Shaft pull-out force	1.3 N
Run out (max)	0.25 mm (19 mm from thread)
Bushing mounting torque	1.1 Nm

ED-19 Quadrature Output Series Magnetic Encoder

DIMENSIONS

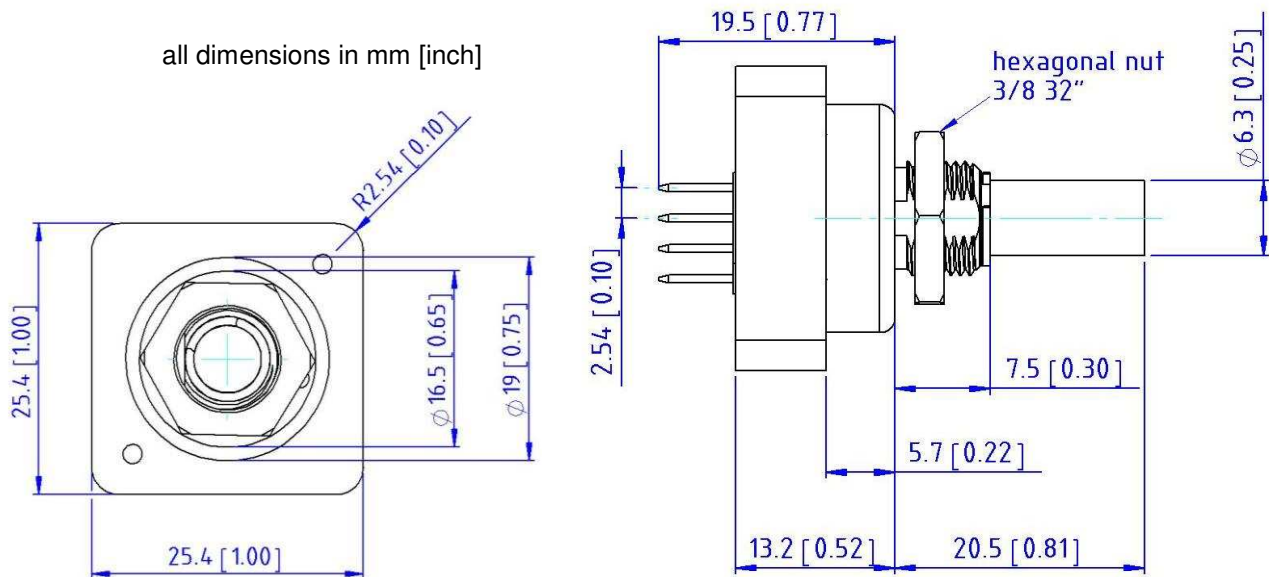


figure 1: Dimensions of the ED-19-SB-XXXX-X-X (top and side view)

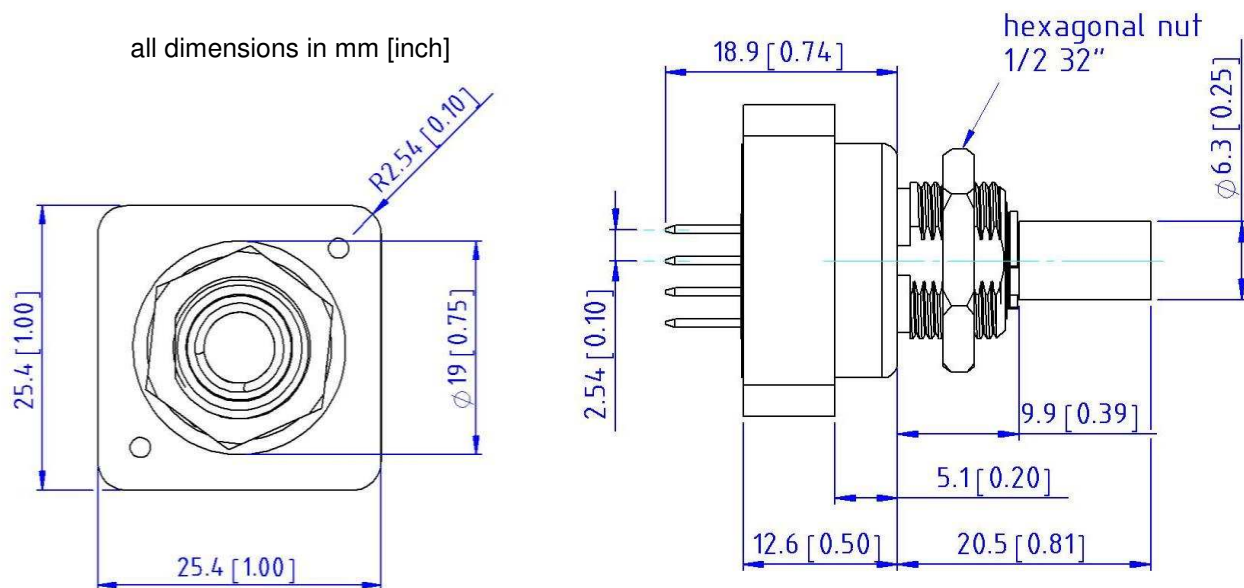


figure 2: Dimensions of the ED-19-BB-XXXX-X-X (top and side view)

ED-19 Quadrature Output Series Magnetic Encoder

PINNING

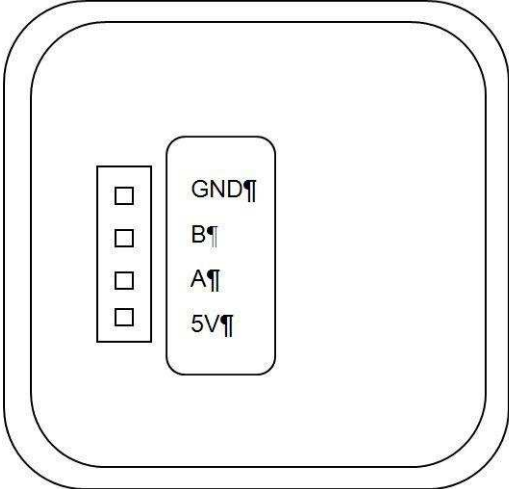


figure 3: Pinning of the ED-19-XX-XXXX-X-X (bottom view)

ED-19 Quadrature Output Series Magnetic Encoder

TYPICAL PERFORMANCE CURVES

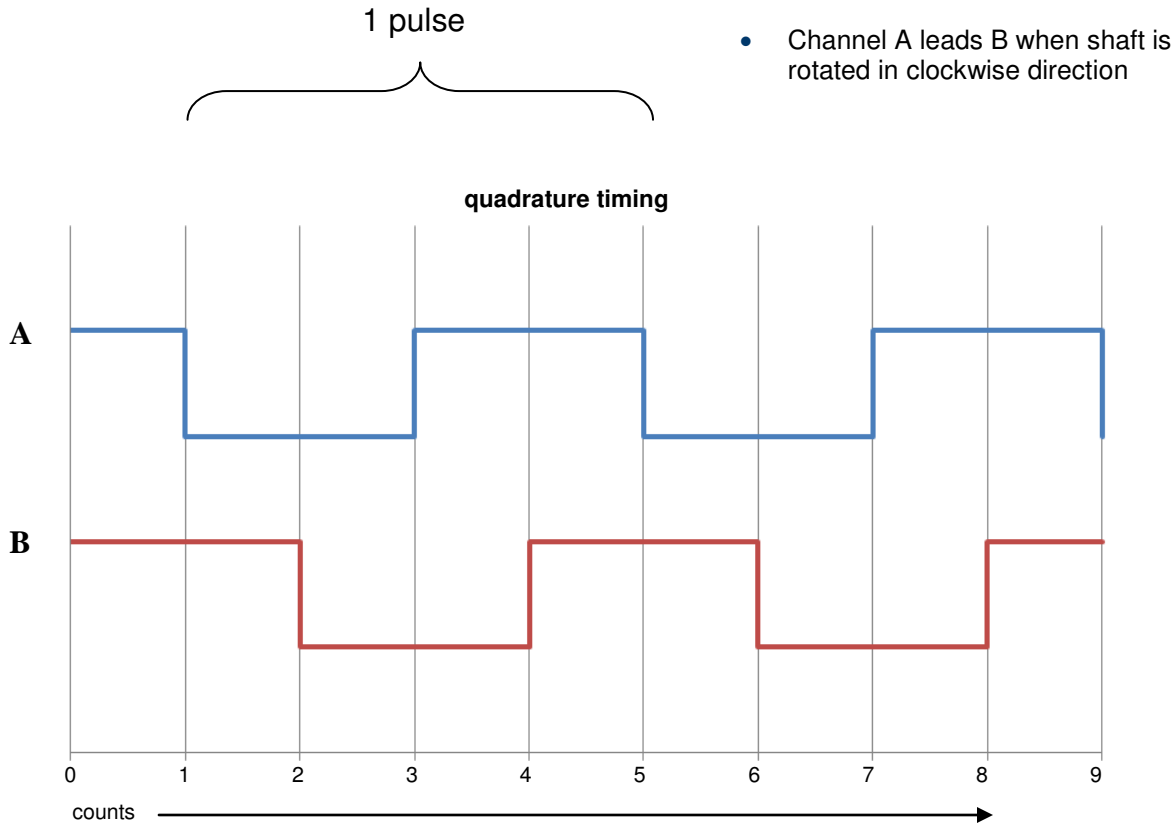


figure 3: quadrature timing

ED-19 Quadrature Output Series Magnetic Encoder

ENVIRONMENTAL


Vibration	MIL-STD-202F Method 204D Test Condition B
Shock	MIL-STD-202F Method 213B Test Condition C
Humidity	MIL-STD-202F Method 103B Test Condition A
Thermal Shock	MIL-STD-202F Method 107G Test Condition A
Operating Temperature	-40 to +85 °C
Storage Temperature	-55 to +125 °C

ED-19 Quadrature Output Series Magnetic Encoder

ORDERING INFORMATION

PART NUMBERING: Model Number - Bearing - Standard range - Output type - Connection

ED-19-XX-XXXX-Q-P

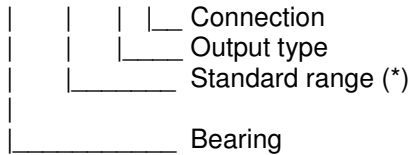

Options:

- P = Pin header
- Q = Quadrature
- 0200 = 200 counts per revolution
- 0400 = 400 counts per revolution
- SB = Sleeve bearing
- BB = Ball bearing

(*) = Different ranges available, contact sales department for details

Example: ED-19-SB-0400-Q-P

Model ED-19, quadrature output with open collector, sleeve bearing, 400 counts per revolution, pin header

NORTH AMERICA	EUROPE	ASIA
Measurement Specialties, Inc. 1000 Lucas Way Hampton, VA 23666 United States Phone: +1-800-745-8008 Fax: +1-757-766-4297 Email: sales@meas-spec.com Web: www.meas-spec.com	MEAS Deutschland GmbH Hauert 13 D-44227 Dortmund Germany Phone: +49-(0)231-9740-0 Fax: +49-(0)231-9740-20 Email: info.de@meas-spec.com Web: www.meas-spec.com	Measurement Specialties China Ltd. No. 26, Langshan Road High-tech Park (North) Nanshan District, Shenzhen 518057 China Phone: +86-755-33305088 Fax: +86-755-33305099 Email: info.cn@meas-spec.com Web: www.meas-spec.com

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.