

86BSD Digital Output



- Stainless steel with O-ring seal
- Pressure/temperature read-out
- Digital output
- ASIC calibrated
- Absolute, gage
- Cable/connector option
- Low power option
- 16mm diaphragm diameter

DESCRIPTION

The 86BSD is a small profile, media compatible, piezoresistive silicon pressure sensor packaged in a 316L stainless steel housing. This 14-bit digital output pressure sensor supports I²C and SPI interface protocols, may come in a 3.3 or 5.0Vdc supply voltage and is designed for o-ring mounting. The sensing package utilizes silicone oil to transfer pressure from the 316L stainless steel diaphragm to the sensing element.

The 86BSD is designed for high performance, low pressure applications. A custom ASIC is used for temperature compensation, offset correction, and provides a digital output of 10~90% or 5~95%.

For a similar sensor with stainless steel fittings, refer to the 85BSD digital output pressure sensor.

FEATURES

- Mountable with O-ring seal
- ±0.25% Accuracy
- ±1.0 Total Error Band
- Cable/connector option
- Low power option
- I²C or SPI Interface protocols

APPLICATIONS

- Level controls
- Tank level measurement
- Corrosive fluids and gas measurement systems
- Sealed systems
- Manifold pressure measurement
- Barometric pressure measurement
- Submersible depth monitoring

STANDARD RANGES

| Range | psiG | psiA | Range | BarG | BarA |
|----------|------|------|----------|------|------|
| 0 to 001 | • | | 0 to .07 | • | |
| 0 to 002 | • | | | | |
| 0 to 005 | • | | 0 to .35 | • | |
| 0 to 015 | • | • | 0 to 001 | • | • |
| 0 to 030 | • | • | 0 to 002 | • | • |
| 0 to 050 | • | • | 0 to 005 | • | • |
| 0 to 100 | • | • | 0 to 007 | • | • |
| 0 to 150 | • | • | 0 to 010 | • | • |
| 0 to 200 | • | • | 0 to 014 | • | • |
| 0 to 300 | • | • | 0 to 020 | • | • |

86BSD Digital Output

PERFORMANCE SPECIFICATIONS

Supply Voltage: 3.3Vdc

Ambient Temperature: 25°C (unless otherwise specified)

| PARAMETERS | MIN | TYP | MAX | UNITS | NOTES |
|--|--|------|------|------------|-------|
| Zero Pressure Output (10% ~ 90%) | | 666 | | Count Hex | 1 |
| Zero Pressure Output (5% ~ 95%) | | 333 | | Count Hex | 1 |
| Full Scale Pressure Output (10% ~ 90%) | | 399A | | Count Hex | 1 |
| Full Scale Pressure Output (5% ~ 95%) | | 3CCB | | Count Hex | 1 |
| Accuracy | -0.25 | | 0.25 | %Span | 2 |
| Total Error Band | -1 | | 1 | %Span | 3 |
| Pressure Resolution | 0.008 | | | %Span | |
| Temperature Accuracy | -1.5 | | 1.5 | °C | 4 |
| Resolution – Temperature | | 0.1 | | °C | |
| Input Voltage Range | 2.7 | 3.3 | 5.5 | V | 1 |
| Supply Current | | 3 | | mA | |
| Insulation Resistance (50Vdc) | 50 | | | MΩ | 5 |
| Overpressure | | | 2X | Rated | 6 |
| Burst Pressure | | | 3X | Rated | 7 |
| Load Resistance (R _L) | 10 | | | KΩ | |
| Long Term Stability (Offset & Span) | | ±0.5 | | %Span/Year | |
| Compensated Temperature (≤5psi) | 0 | | 50 | °C | |
| Compensated Temperature (≥15psi) | -20 | | +85 | °C | |
| Operating Temperature | -40 | | +125 | °C | |
| Storage Temperature | -40 | | +125 | °C | 8 |
| Output Pressure Resolution | | | 14 | Bits | |
| Output Temperature Resolution | 8 | | 11 | Bits | |
| Start Time to Data Ready | | | 8.4 | ms | 9 |
| Output Type | 10% to 90% or 5% to 95% | | | | |
| Interface Type | I ² C (ADDR, 0x28H) | | | | |
| | I ² C (ADDR, 0X36H) | | | | |
| | I ² C (ADDR, 0x46H) | | | | |
| | SPI | | | | |
| Media – Pressure | Liquids and gases compatible with 316/316L Stainless Steel | | | | |



Notes

1. Measured at vacuum for absolute(A), ambient for gage(G) and sealed gage(S). Output is not ratiometric to supply voltage.
2. Accuracy: combined linearity, hysteresis and repeatability.
3. Total Error Band: includes calibration errors and temperature effects over the compensated range. See Figure 3.
4. The deviation from a best fit straight line (BFSL) fitted to the output measured over the compensated temperature range. For errors beyond the compensated temperature range, See Figure 2.
5. Between case and sensing element.
6. 2X or 400psi, whichever is less. The maximum pressure that can be applied to a transducer without changing the transducer's performance or accuracy.
7. 3X or 600psi, whichever is less. The maximum pressure that can be applied to a transducer without rupture of either the sensing element or transducer.
8. Maximum temperature range for product with standard cable and connector is -20°C to +105°C.
9. Start time to data ready is the time to get valid data after POR (Power on Reset). The time to get subsequent valid data is then specified by the response time specification.

86BSD Digital Output

DIMENSIONS

DIMENSIONS ARE IN INCHES [mm].

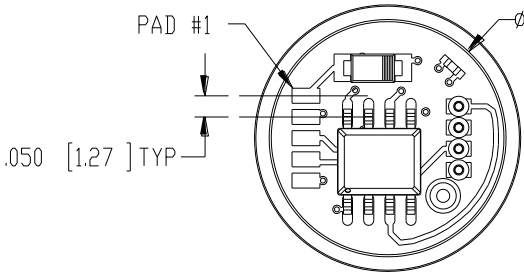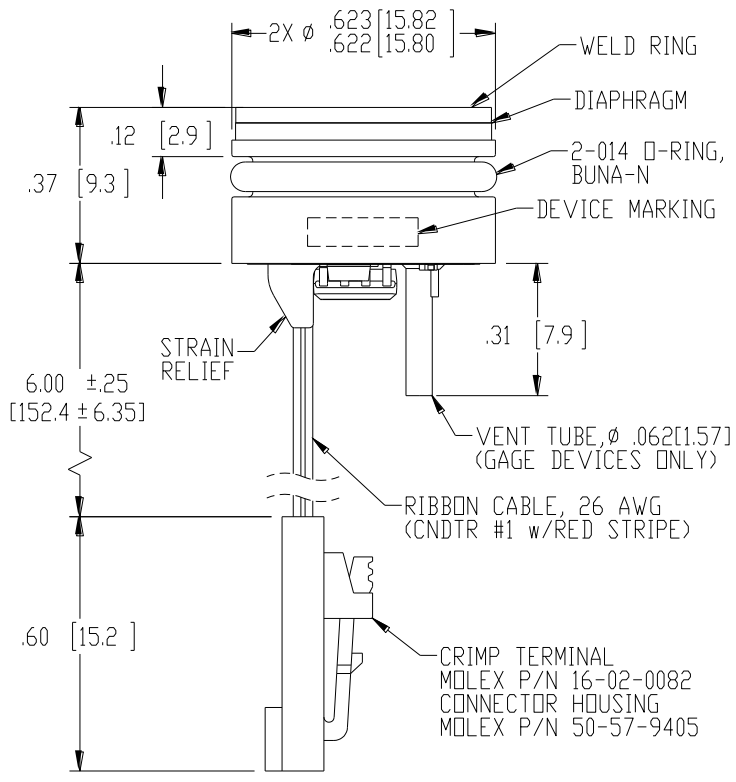

| PAD/CNDR | FUNCTION |
|----------|----------|
| 1 | VDD |
| 2 | GND |
| 3 | SCL/SCLK |
| 4 | SDA/MISO |
| 5 | INT/SS |

VIEW SHOWN w/o
CABLE AND CONNECTOR FOR CLARITY

BLOCK DIAGRAM

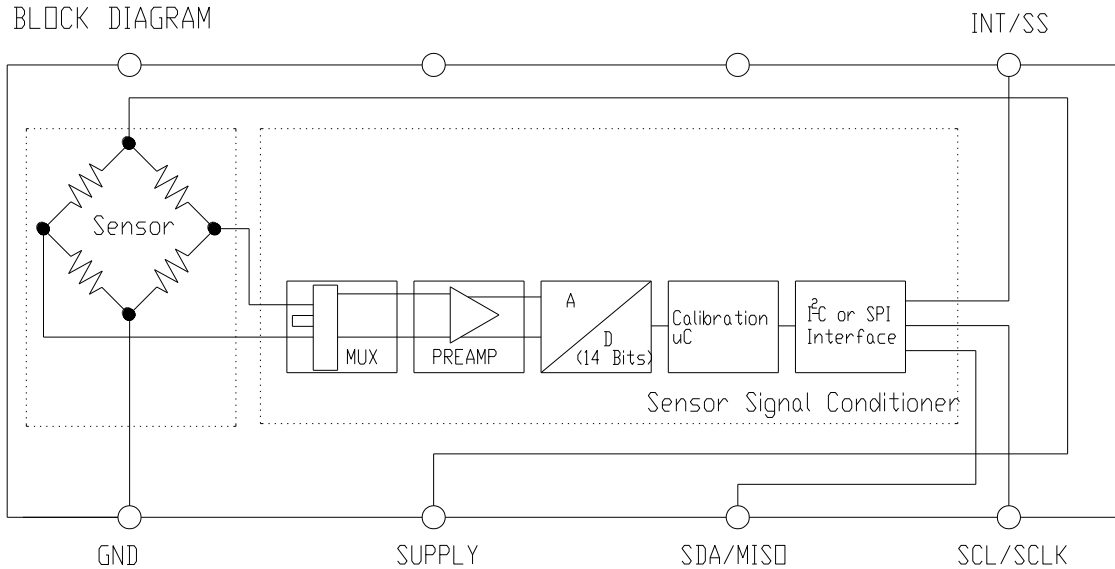


Fig 1

I2C INTERFACE PARAMETERS

| PARAMETERS | SYMBOL | MIN | TYP | MAX | UNITS |
|---|--------------------|-----|-----|-----|-------|
| SCLK CLOCK FREQUENCY | F _{SCL} | 100 | | 400 | KHz |
| START CONDITION HOLD TIME RELATIVE TO SCL EDGE | t _{HDSTA} | 0.1 | | | µs |
| MINIMUM SCL CLOCK LOW WIDTH @1 | t _{LOW} | 0.6 | | | µs |
| MINIMUM SCL CLOCK HIGH WIDTH @1 | t _{HIGH} | 0.6 | | | µs |
| START CONDITION SETUP TIME RELATIVE TO SCL EDGE | t _{SUSTA} | 0.1 | | | µs |
| DATA HOLD TIME ON SDA RELATIVE TO SCL EDGE | t _{HDDAT} | 0 | | | µs |
| DATA SETUP TIME ON SDA RELATIVE TO SCL EDGE | t _{SUDAT} | 0.1 | | | µs |
| STOP CONDITION SETUP TIME ON SCL | t _{SUSTO} | 0.1 | | | µs |
| BUS FREE TIME BETWEEN STOP AND START CONDITION | t _{BUS} | 2 | | | µs |

SPI INTERFACE PARAMETERS

| PARAMETERS | SYMBOL | MIN | TYP | MAX | UNITS |
|---|-------------------|-----|-----|-----|-------|
| SCLK CLOCK FREQUENCY | F _{SCL} | 50 | | 800 | KHz |
| SS DROP TO FIRST CLOCK EDGE | t _{HDSS} | 2.5 | | | µs |
| MINIMUM SCL CLOCK LOW WIDTH @1 | t _{LOW} | 0.6 | | | µs |
| MINIMUM SCL CLOCK HIGH WIDTH @1 | t _{HIGH} | 0.6 | | | µs |
| CLOCK EDGE TO DATA TRANSITION | t _{CLKD} | 0 | | 0.1 | µs |
| RISE OF SS RELATIVE TO LAST CLOCK EDGE | t _{SUSS} | 0.1 | | | µs |
| BUS FREE TIME BETWEEN RISE AND FALL OF SS | t _{BUS} | 2 | | | µs |

@1 COMBINED LOW AND HIGH WIDTHS MUST EQUAL OR EXCEED MINIMUM SCL PERIOD.

TEMPERATURE/PRESSURE ACCURACY

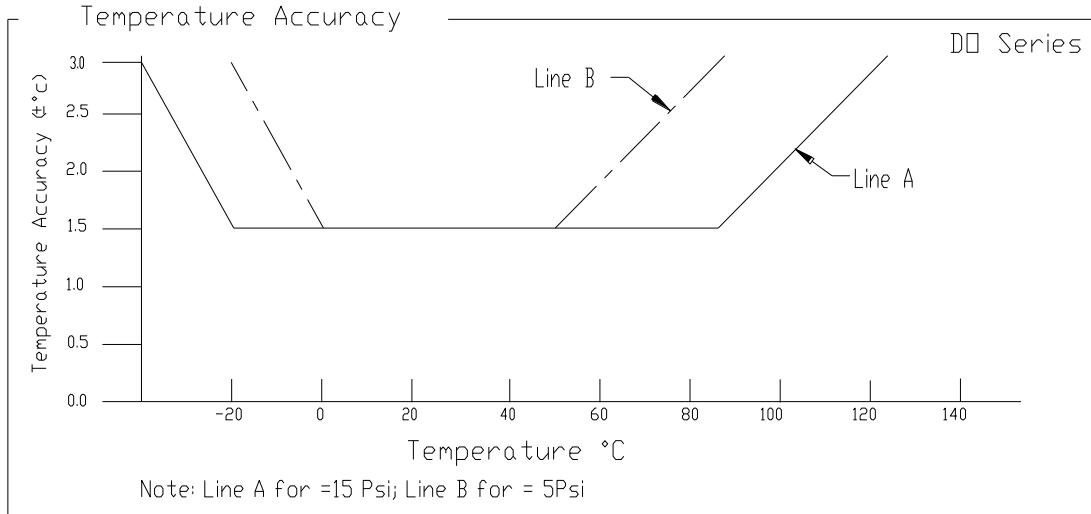


Fig 2

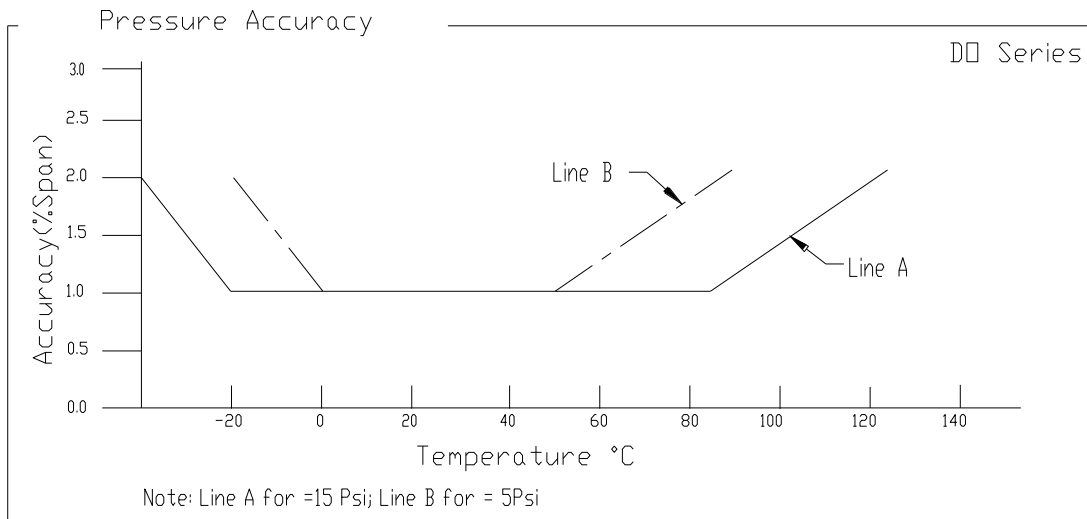


Fig 3

86BSD Digital Output

PRESSURE TRANSFER FUNCTIONS

Pressure Transfer Functions

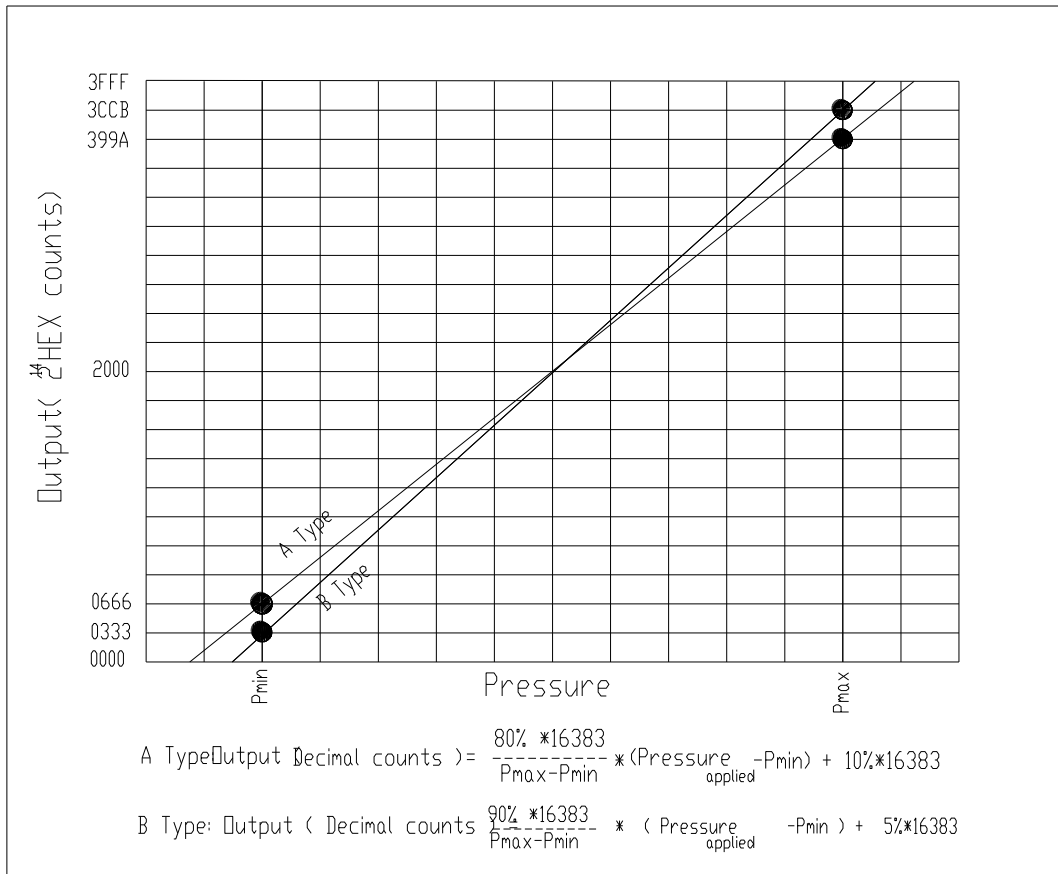


Fig 4

Sensor Output at Significant Percentages

| % Output | Digital Counts (decimal) | Digital Counts (hex) |
|----------|--------------------------|----------------------|
| 0 | 0 | 0 X 0000 |
| 5 | 819 | 0 X 0333 |
| 10 | 1638 | 0 X 0666 |
| 50 | 8192 | 0 X 2000 |
| 90 | 14746 | 0 X 399A |
| 95 | 15563 | 0 X 3CCB |
| 100 | 16383 | 0 X 3FFF |

86BSD Digital Output

TEMPERATURE TRANSFER FUNCTIONS

Temperature Transfer Functions

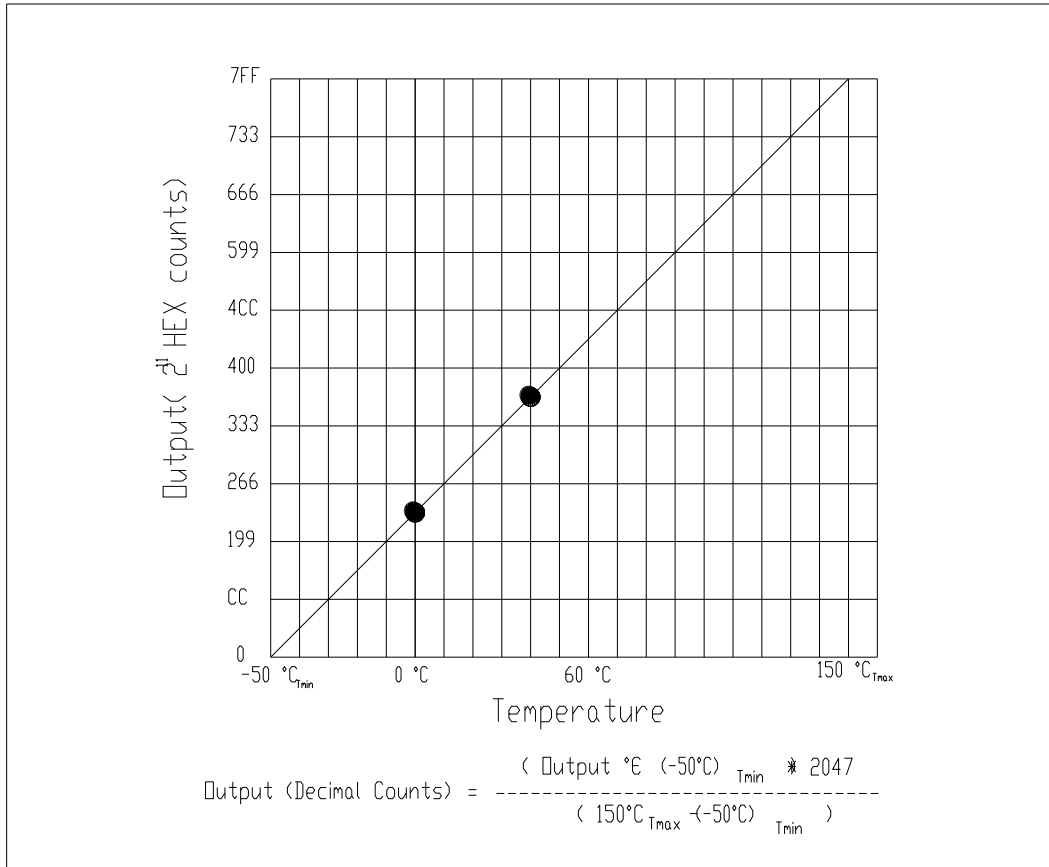


Fig 5


Temperature Output vs Counts

| Output °C | Digital Counts (decimal) | Digital Counts (hex) |
|-----------|--------------------------|----------------------|
| -50 | 0 | 0 X 0000 |
| 0 | 512 | 0 X 0200 |
| 10 | 614 | 0 X 0266 |
| 25 | 767 | 0 X 02FF |
| 40 | 921 | 0 X 0399 |
| 85 | 1381 | 0 X 0565 |
| 150 | 2047 | 0 X 07FF |

86BSD Digital Output

ORDERING INFORMATION

86B S D 015P A - 3 A I C L

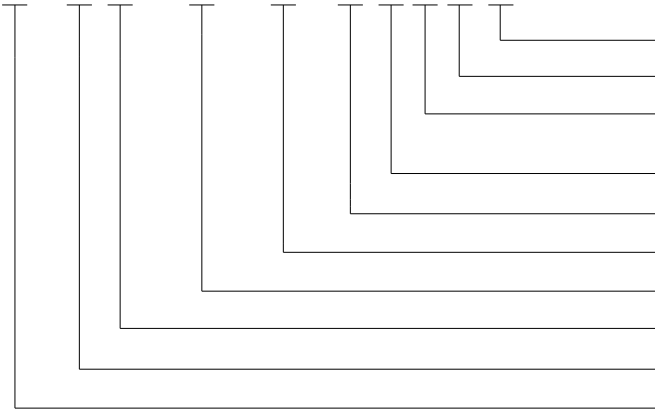

Low Power (Blank = None, L = Low Power)
 Connection (P = Pads, R = Ribbon Cable, C = Cable w/ Connector)
 Interface (I = I2C (ADDR. 0X28H, J = I2C (ADDR. 0X36H),
 K = I2C (ADDR. 0X46H, S = SPI)
 Output (A = 10~90%, B = 5~95%)
 Supply Voltage (3 = 3.3Vdc, 5 = 5.0Vdc)
 Type (A = Absolute, G = Gage)
 Pressure Range
 Digital Output
 Stainless Steel
 Model

NORTH AMERICA

Measurement Specialties
 45738 Northport Loop West
 Fremont, CA 94538
 Tel: 1-800-767-1888
 Fax: 1-510-498-1578
 Sales: pfg.cs.amer@meas-spec.com

EUROPE

Measurement Specialties
 (Europe), Ltd.
 26 Rue des Dames
 78340 Les Clayes-sous-Bois, France
 Tel: +33 (0) 130 79 33 00
 Fax: +33 (0) 134 81 03 59
 Sales: pfg.cs.emea@meas-spec.com

ASIA

Measurement Specialties
 (China), Ltd.
 No. 26 Langshan Road
 Shenzhen High-Tech Park (North)
 Nanshan District, Shenzhen 518057
 China
 Tel: +86 755 3330 5088
 Fax: +86 755 3330 5099
 Sales: pfg.cs.asia@meas-spec.com

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.