




# Model 4400 Disposable Temperature Probes

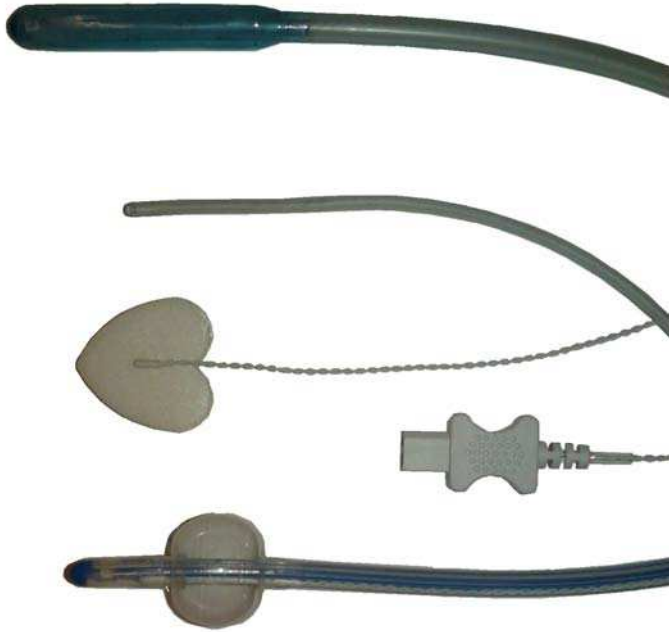

- Full Disposable Probe Product Line
  - Esophageal/Stethoscope probes, 12, 18 & 24FR
  - General Purpose probes, 9 & 12FR
  - Skin probes with adhesive "Tempheart"
  - Foley Catheter probes, 14, 16, 18FR
- Sterile single-use product
- FDA Registered
- CE Marked for global sales 
- Multi-language Instructions for Use & product labeling
- "Molex" style connector system
- 400 series nominal resistance response curve
- 2252.4 ohm Resistance @ 25°C (including adaptor cable lead wire resistance)
- Interchangeable  $\pm 0.1$  °C, 25°C to 45°C per EN 12470
- RoHS Compliant 

## DESCRIPTION

A line of 400-series, sterile, single-use temperature probes in multiple styles to meet specific continuous patient temperature monitoring applications.

## FEATURES

- FDA / CE MDD
- Standard 400 series resistance response
- Various application specific configurations
- Individual Sterile pouch with 3-year shelf life
- "Molex" style connector
- Multiple probes per box (10 / box for Foleys, 20 / box for other styles)

## APPLICATIONS

- Continuous patient monitoring
- Esophageal temperature measurement (4491, 4492)
- Rectal temperature measurement (4491, 4492)
- Skin temperature measurement (4499)
- Esophageal temperature & monitor heart sounds (4412, 4418, 4424)
- Urinary drainage & bladder temperature (4464, 4466, 4468)

# Model 4400 Disposable Temperature Probes

## PERFORMANCE SPECS

Parameter	Units	Value
Resistance @ 25°C (including lead resistance)	Ohms	2252.4
Tolerance 25°C to 45°C	°C	± 0.1
Beta Value 25/85	K	3976
Tolerance on Beta Value	%	0.4
Typical response time in stirred fluid	Seconds	< 40
Insulation Resistance (Min. of 100Mohms for 1 Sec.)	Volts	500
Liquid immersion with 15VDC applied	Ohms	> 15Meg

## MECHANICAL DETAILS

Probe Style	Probe Length	Probe Diameter (FRENCH)
Skin Probe (4499 & 4499RJ)	30 inches, 762 mm	Not Applicable
9FR General Purpose (4491 & 4491RJ)	36 inches, 914 mm	3 mm (9)
12FR General Purpose (4492)	36 inches, 914 mm	4 mm (12)
12FR Esophageal / Stethoscope (4412)	18.5 inches, 470 mm	4 mm (12)
18FR Esophageal / Stethoscope (4418)	18.5 inches, 470 mm	6 mm (18)
24FR Esophageal / Stethoscope (4424)	18.5 inches, 470 mm	8 mm (24)
14FR Foley Catheter w/5 cc balloon (4464)	15.6 inches, 395 mm	4.7 mm (14)
16FR Foley Catheter w/5 cc balloon (4466)	15.6 inches, 395 mm	5.3 mm (16)
18FR Foley Catheter w/5 cc balloon (4468)	15.6 inches, 395 mm	6 mm (18)
4940 Adaptor Cable	10 feet, 3048mm	Not Applicable

## RESISTANCE VS TEMPERATURE VALUES

Temp °C	K Ohms
25	2.2524
26	2.1564
27	2.0644
28	1.9774
29	1.8944

Temp °C	K Ohms
30	1.8154
31	1.7394
32	1.6674
33	1.5994
34	1.5334

Temp °C	K Ohms
35	1.4714
36	1.4124
37	1.3554
38	1.3014
39	1.2494

Temp °C	K Ohms
40	1.2004
41	1.1524
42	1.1074
43	1.0644
44	1.0234
45	0.9842

## FUNCTION

Continuous Temperature monitoring of patients (application depends upon probe style).

# Model 4400 Disposable Temperature Probes

## ORDERING INFORMATION

Part Number	Description	$\Omega$ @25°C	MOQ
<a href="#">861527</a>	4491 9Fr General Purpose Probe (Box of 20)	2252.4 *	10 Boxes
<a href="#">861528</a>	4492 12Fr General Purpose Probe (Box of 20)	2252.4 *	10 Boxes
<a href="#">861552</a>	4499 Skin Probe (Box of 20)	2252.4 *	10 Boxes
<a href="#">861558</a>	4412 12Fr Esophageal/Stethoscope (Box of 20)	2252.4 *	10 Boxes
<a href="#">861559</a>	4418 18Fr Esophageal/Stethoscope (Box of 20)	2252.4 *	10 Boxes
<a href="#">861573</a>	4424 24Fr Esophageal/Stethoscope (Box of 20)	2252.4 *	10 Boxes
<a href="#">861555</a>	4464 14Fr Foley Catheter (Box of 10)	2252.4 *	10 Boxes
<a href="#">861556</a>	4466 16Fr Foley Catheter (Box of 10)	2252.4 *	10 Boxes
<a href="#">861557</a>	4468 18Fr Foley Catheter (Box of 10)	2252.4 *	10 Boxes
<a href="#">861517</a>	4940 Adaptor Cable (1 each)	N/A	10
<a href="#">861526TP</a>	4491RJ 9Fr General Purpose Probe w/RJ11 connector (old YSI style) (Box of 20)	2252.4 *	10 Boxes
<a href="#">861551TP</a>	4499RJ Skin Probe w/RJ11 connector (old YSI style) (Box of 20)	2252.4 *	10 Boxes
<a href="#">861517RJ</a>	4940RJ Adaptor Cable for RJ11 connectors (1 each)	N/A	10

\* When using 4940 adaptor cable

### NORTH AMERICA

Measurement Specialties, Inc.  
2670 Indian Ripple Road  
Dayton, OH 45440  
Tel: 1-937-427-1231  
Fax: 1-937-427-1640

Sales email:  
[temperature.info.dayton@meas-spec.com](mailto:temperature.info.dayton@meas-spec.com)

### EUROPE

Measurement Specialties, Inc  
Ballybrit Business Park  
Galway, Ireland  
Tel: +353-91-753238  
Fax: +353-91-770789

Sales email:  
[temperature.sales.emea@meas-spec.com](mailto:temperature.sales.emea@meas-spec.com)

### ASIA

Measurement Specialties (China) Ltd.  
No. 26 Langshan Road  
Shenzhen High-Tech Park (North)  
Nanshan District, Shenzhen 518057  
China  
Tel: +86 (0) 755 33305088  
Fax: +86 (0) 755 33305099

Sales email:  
[temperature.sales.asia@meas-spec.com](mailto:temperature.sales.asia@meas-spec.com)

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.