

# Model 409A Reusable Skin / Surface Probe



- FDA Registered
- CE Marked for global sales
- 400 series nominal resistance response curve
- 2252.4 ohm Resistance @ 25 ℃ (including lead wire resistance)
- Interchangeable ±0.1 °C, 25 °C to 45 °C per EN 12470,
- Tested to ±0.1 °C, 0 °C to 70 °C for laboratory use
- Pressed Disk Ceramic Sensor
- High sensitivity
- High temperature capability
- PTFE ribbon cable at thermistor
- 1/4" phone plug connector

#### **DESCRIPTION**

400-series skin / surface temperature probe with 1/4" phone plug

### **FEATURES**

- FDA / CE MDD
- Fast response through surface contact area
- Standard 400 series resistance response
- Standard ¼" phone plug connector
- Reuse after cleaning
- PTFE ribbon cable at thermistor

### **APPLICATIONS**

- Continuous patient monitoring
- Surface temperature measurement


#### **PERFORMANCE SPECS**

Parameter	Units	Value
Resistance @ 25 ℃ (including lead resistance)	Ohms	2252.4
Tolerance 0°C to 70°C	<b>℃</b>	± 0.1
Beta Value 25/85	K	3976
Tolerance on Beta Value	%	0.4
Typical response time in stirred fluid	Seconds	< 3.5
Insulation Resistance (Min. of 100Mohms for 1 Sec.)	Volts	500
Liquid immersion with 15VDC applied	Ohms	> 15Meg



## Model 409A Reusable Skin / Surface Probe

## **MECHANICAL DETAILS**

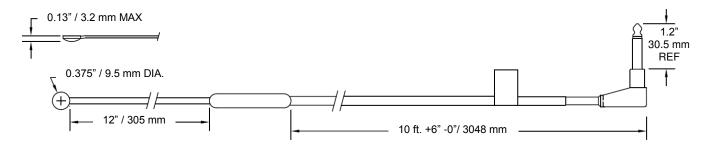

## **RESISTANCE V TEMPERATURE TABLE**

K-Ohms
7.3554
6.9894
6.6444
6.3194
6.0114
5.7194
5.4444
5.1834
4.9374
4.7034
4.4824
4.2734
4.0744
3.8864
3.7084
3.5394
3.3784
3.2264

Temp ℃	K-Ohms
18	3.0814
19	2.9444
20	2.8144
21	2.6904
22	2.5724
23	2.4604
24	2.3544
25	2.2524
26	2.1564
27	2.0644
28	1.9774
29	1.8944
30	1.8154
31	1.7394
32	1.6674
33	1.5994
34	1.5334
35	1.4714

K-Ohms
1.4124
1.3554
1.3014
1.2494
1.2004
1.1524
1.1074
1.0644
1.0234
0.9842
0.9466
0.9106
0.8762
0.8432
0.8117
0.7815
0.7526
0.7249

Temp ℃	K-Ohms
54	0.6983
55	0.6729
56	0.6485
57	0.6252
58	0.6028
59	0.5813
60	0.5607
61	0.5409
62	0.5219
63	0.5037
64	0.4862
65	0.4694
66	0.4533
67	0.4378
68	0.4229
69	0.4086
70	0.3949

## **ORDERING INFORMATION**

Part Number	Description	Ω @25°C	MOQ
081208	409A PROBE	2252.4	20

<sup>\*</sup> For quantities less than Minimum Order Quantity – contact distribution



## Model 409A Reusable Skin / Surface Probe

### NORTH AMERICA EUROPE ASIA

Measurement Specialties, Inc. 2670 Indian Ripple Road Dayton, OH 45440 Tel: 1-937-427-1231

Fax: 1-937-427-1231

Sales email:

temperature.info.dayton@meas-spec.com

Measurement Specialties, Inc Ballybrit Business Park Galway Ireland

Tel: +353-91-753238 Fax: +353-91-770789

Sales email:

temperature.sales.emea@meas-spec.com

Measurement Specialties (China) Ltd. No. 26 Langshan Road Shenzhen High-Tech Park (North) Nanshan District, Shenzhen 518057 China

> Tel: +86 (0) 755 33305088 Fax: +86 (0) 755 33305099

Sales email:

temperature.sales.asia@meas-spec.com

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.