

# Model TS105-10L5.5mm Thermopile Sensor



- Thermopile IR-Sensor
- For Contactless Temperature Measurement
- Single Element
- For Industrial Pyrometers
- Silicon Lens
- Accurate Reference Sensor



## DESCRIPTION

Thermopiles are mainly used for contactless temperature measurement in many applications. Their function is to transfer the heat radiation emitted from the objects into a voltage output.

## FEATURES

Small Field of View  
Accurate NTC Reference Sensor

## APPLICATIONS

Industrial Pyrometers

## ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Typical	Max	Unit	Description
Storage Temperature	$T_s$	-20	+20	+85	°C	permanent
Storage Temperature	$T_s$	-20	+20	+100	°C	non permanent

# Model TS105-10L5.5mm Thermopile Sensor

## PERFORMANCE SPECS

Parameter	Symbol	Value	Unit	Condition
Operating Ambient Temperature	$T_{Amb}$	-20 to +85	°C	permanent
Operating Ambient Temperature	$T_{Amb}$	-20 to +100	°C	non permanent
Package		TO-5		
Absorber Area	A	$0.7 \times 0.7$	mm <sup>2</sup>	
Thermopile Resistance	$R_{TP}$	$43 \pm 8$	k $\Omega$	$T_{Amb} = +25^{\circ}\text{C}$
Temperature Coefficient of Thermopile Resistance	$TCR_{TP}$	$-0.06 \pm 0.04$	%/K	$T_{Amb} = +25^{\circ}\text{C}$ to $+75^{\circ}\text{C}$
Voltage Response	$V_{TP}$	$0.9 \pm 0.25$	mV	$T_{Amb} = +25^{\circ}\text{C}$ , $T_{Obj} = +100^{\circ}\text{C}$ , DC, totally filled field of view
Temperature Coefficient of Voltage Response	$TCV_{TP}$	$-0.45 \pm 0.08$	%/K	$T_{Amb} = +25^{\circ}\text{C}$ to $+75^{\circ}\text{C}$
Noise Equivalent Voltage	NEV	30	nV/Hz <sup>1/2</sup>	$T_{Amb} = +25^{\circ}\text{C}$
Rise Time	$\tau_{63}$	$20 \pm 5$	ms	
Ambient Temperature Sensor		NTC		
Ambient Temperature Sensor Resistance	$R_{NTC}$	$100 \pm 5$	k $\Omega$	$T_{Amb} = +25^{\circ}\text{C}$
Beta Value of NTC	$\beta$ -Value	$3955 \pm 0.3\%$	K	$T_{Amb} = 0^{\circ}\text{C}$ to $+50^{\circ}\text{C}$

## TYPICAL PERFORMANCE CURVES

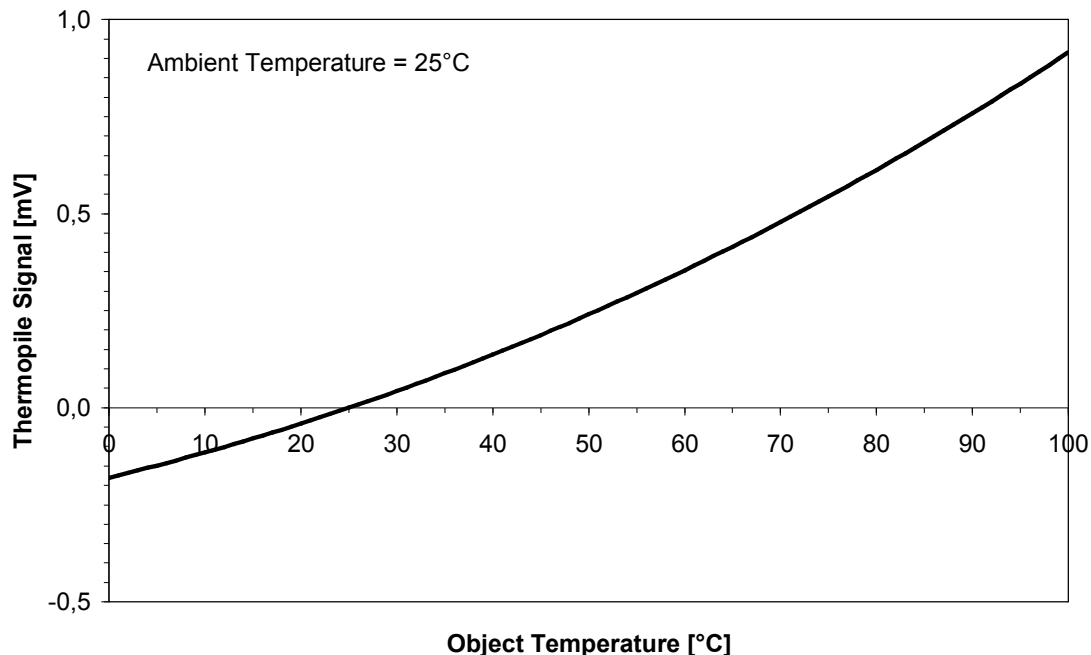


Figure 1: Thermopile signal versus object temperature at 25°C ambient temperature

# Model TS105-10L5.5mm Thermopile Sensor

## OPTICAL CHARACTERISTICS

Parameter	Symbol	Value	Unit	Description
Field of View	FOV	10	deg	at 50% of maximum signal

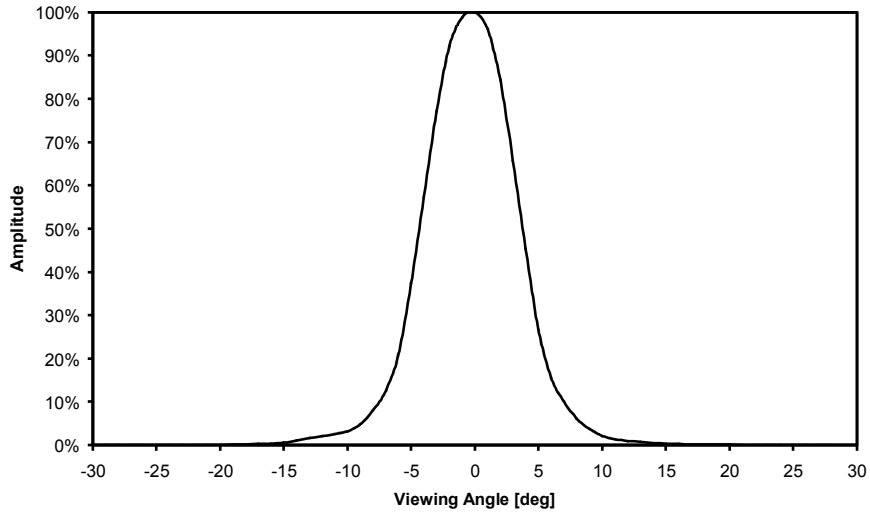


Figure 2: Field of View Curve

## FILTER CHARACTERISTICS

Parameter	Symbol	Value	Unit	Description
Transmission Range	Si	$\geq 1.1$	$\mu\text{m}$	Silicon

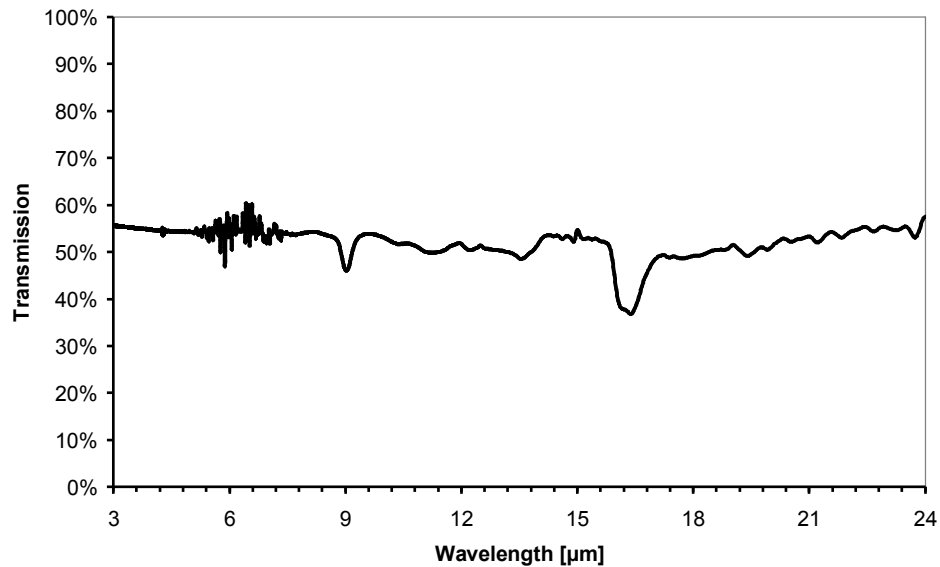


Figure 3: Lens transmission curve

# Model TS105-10L5.5mm Thermopile Sensor

## ELECTRICAL CONNECTIONS

Pin	Symbol
1	TP +
2	NTC
3	TP -
4	GND

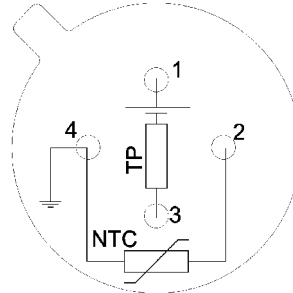


Figure 4: Electrical connections - bottom view of thermopile

## MECHANICAL DIMENSIONS

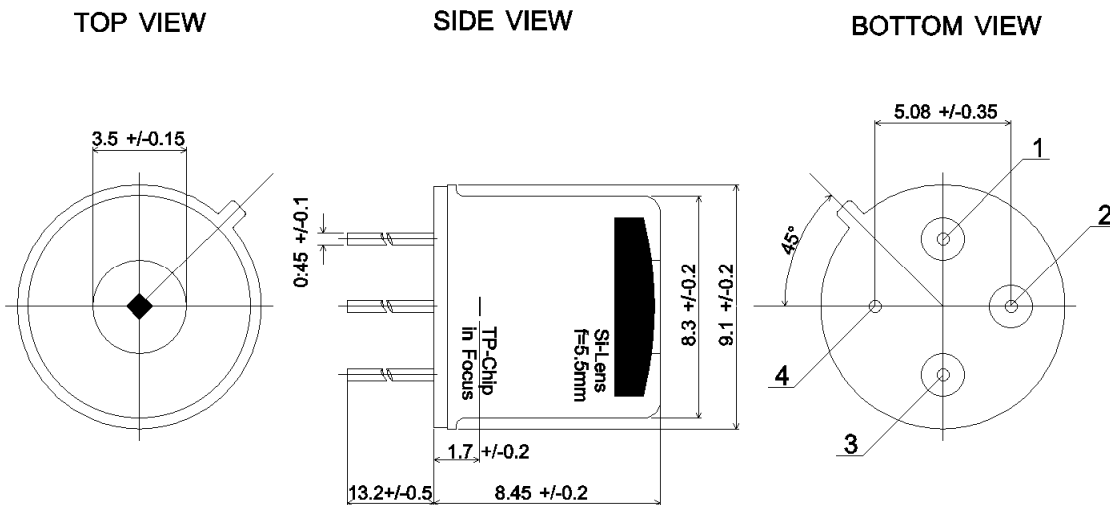


Figure 5: Mechanical dimensions of thermopile

# Model TS105-10L5.5mm Thermopile Sensor

---

## ORDERING INFORMATION

---

**Part Description**      TS105-10 L5.5 NTC 100K BETA  
**Part No.**                 G-TPCO-019

---

## TECHNICAL CONTACT INFORMATION

---

<b>North America</b>	<b>Europe</b>	<b>Asia</b>
<p>Measurement Specialties, Inc.</p> <p>1000 Lucas Way Hampton, VA 23666</p> <p>Tel: 1-800-745-8008 Fax: 1-757-766-4297 Email: sales@meas-spec.com</p>	<p>MEAS Deutschland GmbH</p> <p>Hauert 13, D-44227 Dortmund, Germany</p> <p>Phone: +49-(0)231-9740-0 Fax: +49-(0)231-9740-20 Email: info.de@meas-spec.com</p>	<p>Measurement Specialties China Ltd.</p> <p>No. 26, Langshan Road, Shenzhen High-tech Park (North) Nanshan District, Shenzhen, China 518057</p> <p>Phone: +86-755-33305088 Fax: +86-755-33305099 Email: sales.china@meas-spec.com</p>

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.