

2mm Travel Thin Type Slide Switch SLM-750 Series

1/4

□ Features

- ◇ 2mm travel.
- ◇ Thin type only 2mm height
- ◇ Recoil type.
- ◇ It is a reflow solder mounting type.
- ◇ Taping package.



□ Applications

- ◇ Signal switching for CD/MD/DVD such a portable audio, digital camera, remote control etc.

□ Products line

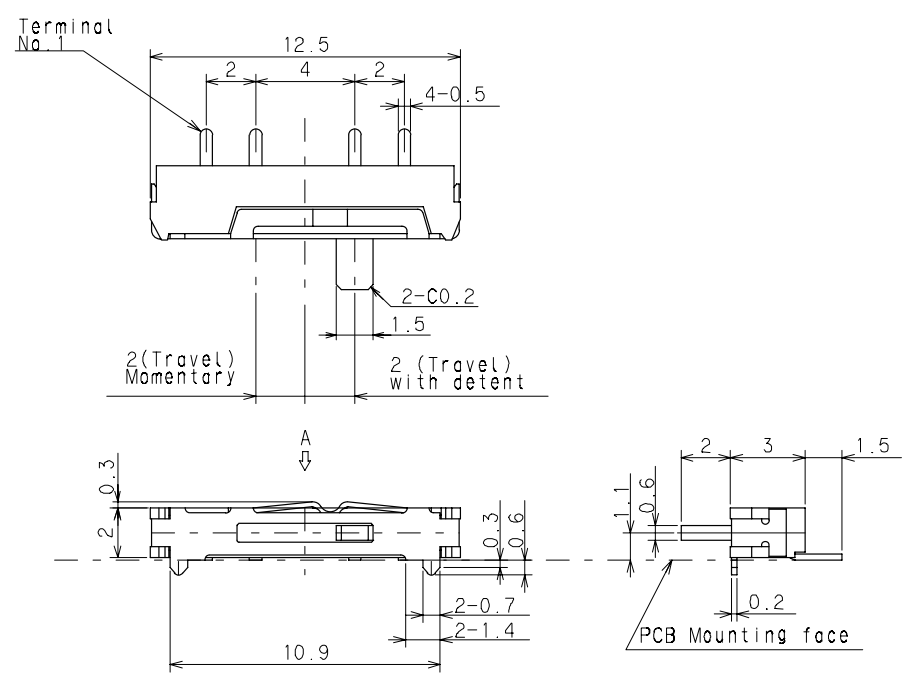

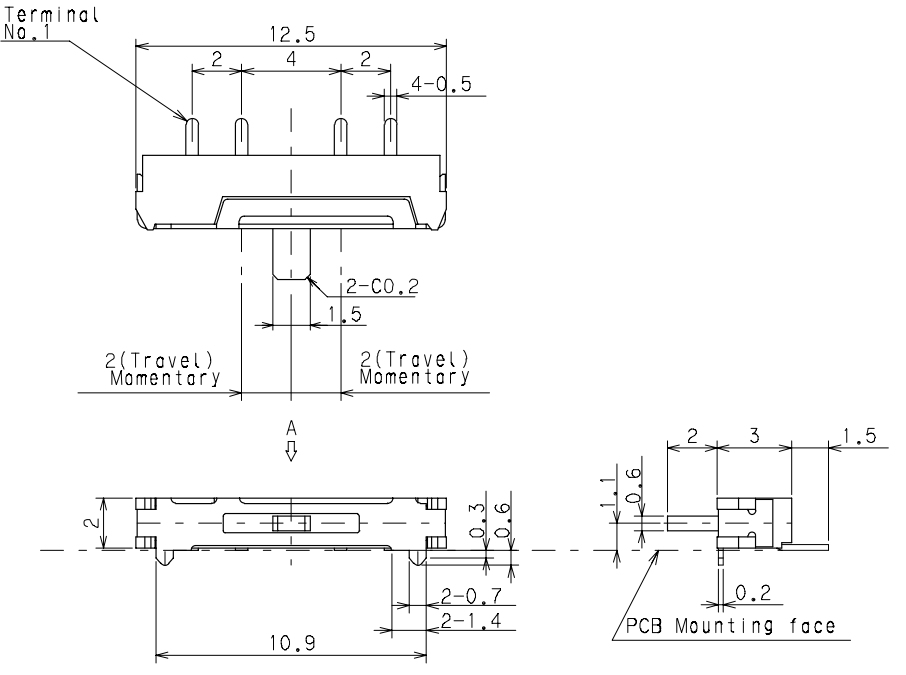
No	Products number	Poles	Positions	Operation mechanism
1	SLM-13-750-1-T23	1	3	Single-side recoil
2	SLM-13-750A-T23	1	3	Double-side recoil
3	SLM-13-750B-T23	1	3	Single-side recoil

□ Typical specifications

Items	Specifications
Rating (max) (resistive load)	0.3A 4VDC
Contact resistance	70 milliohm
Insulation resistance	100 megohm
Withstanding voltage	500VAC 1min.
Operating force	Refer to the dimensions
Operating life	10,000 cycles
Operation temperature range	From -10 to +60 degree Celsius
Storage temperature range	From -25 to +70 degree Celsius

Dimensions

Unit : mm

No	Style	Circuit diagram
1	<p>SLM-13-750-1-T23</p>  <p>Operating force : From C to R, 1.25 from 3.25N From R to C, 0.75 from 2.75N From C to L, 1 from 2.05N</p>	
2	<p>SLM-13-750A-T23</p>  <p>Operating force : 1 from 2.05N</p>	