

INCH-POUND

MIL-M-38510/330C
25 November 2003
SUPERSEDING
MIL-M-38510/330B
5 April 1983

MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, BIPOLAR ADVANCED SCHOTTKY TTL,
NAND GATES, MONOLITHIC SILICON

Reactivated after 25 November 2003 and may be used for either new or existing design acquisition.

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product herein shall consist of this specification sheet and MIL-PRF 38535

1. SCOPE

1.1 Scope. This specification covers the detail requirements for monolithic silicon, Advanced Schottky TTL, positive NAND logic gate microcircuits. Two product assurance classes and a choice of case outlines and lead finishes are provided for each type and are reflected in the complete part number. For this product, the requirements of MIL-M-38510 have been superseded by MIL-PRF-38535, (see 6.3).

1.2 Part or Identifying Number (PIN). The PIN should be in accordance with MIL-PRF-38535, and as specified herein.

1.2.1 Device types. The device types should be as follows:

<u>Device type</u>	<u>Circuit</u>
01	Quadruple, 2-input positive NAND gate
02	Hex, 1-input inverter gate
03	Triple, 3-input positive NAND gate
04	Dual, 4-input positive NAND gate

1.2.2 Device class. The device class should be the product assurance level as defined in MIL-PRF-38535.

1.2.3 Case outlines. The case outlines should be as designated in MIL-STD-1835 and as follows:

<u>Outline letter</u>	<u>Descriptive designator</u>	<u>Terminals</u>	<u>Package style</u>
A	GDFP5-F14 or CDFP6-F14	14	Flat pack
B	GDFP4-14	14	Flat pack
C	GDIP1-T14 or CDIP2-T14	14	Dual-in-line
D	GDFP1-F14 or CDFP2-F14	14	Flat pack
X	CQCC2-N20	20	Square leadless chip carrier
2	CQCC1-N20	20	Square leadless chip carrier

Comments, suggestions, or questions on this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAS, 3990 East Broad St., Columbus, OH 43216-5000, or emailed to bipolar@dsccl.dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at www.dodssp.daps.mil.

MIL-M-38510/330C

1.3 Absolute maximum ratings.

Supply voltage range	-0.5 V to +7.0 V
Input voltage range	-1.2 V at -18 mA to +7.0 V
Storage temperature range	-65° to +150°C
Maximum power dissipation, (P _D) <u>1/</u>	
Device type 01	56 mW
Device type 02	84 mW
Device type 03	42 mW
Device type 04	28 mW
Lead temperature (soldering, 10 seconds)	+300°C
Thermal resistance, junction to case (θ _{JC}):	
Cases A, B, C, D, X, and 2	(See MIL-STD-1835)
Junction temperature (T _J) <u>2/</u>	175°C

1.4 Recommended operating conditions.

Supply voltage (V _{CC})	4.5 V minimum to 5.5 V maximum
Minimum high level input voltage (V _{IH})	2.0 V
Maximum low level input voltage (V _{IL})	0.8 V
Normalized fanout (each output) <u>3/</u>	
Low logic level	33 maximum
High logic level	50 maximum
Case operating temperature range (T _C)	-55° to +125°C

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications and Standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-38535 - Integrated Circuits (Microcircuits) Manufacturing, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-883 - Test Method Standard for Microelectronics.
MIL-STD-1835 - Interface Standard Electronic Component Case Outlines

(Copies of these documents are available online at <http://assist.daps.dla.mil;quicksearch/> or www.dodssp.daps.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

1/ Must withstand the added P_D due to short-circuit test (e.g., I_{OS}).
2/ Maximum junction temperature shall not be exceeded except in accordance with allowable short duration burn-in screening condition in accordance with MIL-PRF-38535.
3/ Device will fanout in both high and low levels to the specified number of data inputs on the same device type as that being tested.

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Qualification. Microcircuits furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.3 and 6.4).

3.2 Item requirements. The individual item requirements shall be in accordance with MIL-PRF-38535 and as specified herein or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein.

3.3 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38535 and herein.

3.3.1 Terminal connections and logic diagrams. The terminal connections and logic diagrams shall be as specified on figure 1.

3.3.2 Truth tables and logic equations. The truth tables and logic equations shall be as specified on figure 2.

3.3.3 Schematic circuits. The schematic circuits shall be maintained by the manufacturer and made available to the qualifying activity and the preparing activity upon request.

3.3.4 Case outlines. The case outlines shall be as specified in 1.2.3.

3.4 Lead material and finish. The lead material and finish shall be in accordance with MIL-PRF-38535 (see 6.6).

3.5 Electrical performance characteristics. The electrical performance characteristics are as specified in table I, and apply over the full recommended case operating temperature range, unless otherwise specified.

3.6 Electrical test requirements. The electrical test requirements for each device class shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table III.

3.7 Marking. Marking shall be in accordance with MIL-PRF-38535.

3.8 Microcircuit group assignment. The devices covered by this specification shall be in microcircuit group number 8 (see MIL-PRF-38535, appendix A).

4. VERIFICATION

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-PRF-38535 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not effect the form, fit, or function as described herein.

4.2 Screening. Screening shall be in accordance with MIL-PRF-38535 and shall be conducted on all devices prior to qualification and quality conformance inspection. The following additional criteria shall apply:

- a. The burn-in test duration, test condition, and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The burn-in test circuit shall be maintained under document control by the device manufacturer's Technology Review Board (TRB) in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015 of MIL-STD-883.
- b. Interim and final electrical test parameters shall be as specified in table II, except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.
- c. Additional screening for space level product shall be as specified in MIL-PRF-38535.

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions -55°C ≤ T _C ≤ +125°C	Device types	Limits		Unit
				Min	Max	
High level output voltage	V _{OH}	V _{CC} = 4.5 V, V _{IL} = 0.8 V, I _{OH} = -1.0 mA	All	2.5		V
Low level output voltage	V _{OL}	V _{CC} = 4.5 V, I _{OL} = 20 mA, V _{IH} = 2.0 V	All		0.5	V
Input clamp voltage	V _{IC}	V _{CC} = 4.5 V, I _{IN} = -18 mA, T _C = +25°C	All		-1.2	V
High level input current	I _{IH1}	V _{CC} = 5.5 V, V _{IN} = 2.7 V	All		20	μA
	I _{IH2}	V _{CC} = 5.5 V, V _{IN} = 7.0 V	All		100	μA
Low level input current	I _{IL}	V _{CC} = 5.5 V, V _{IN} = 0.5 V	All	0	-0.60	mA
Short circuit output current ^{1/}	I _{OS}	V _{CC} = 5.5 V	All	-60	-150	mA
Output drive	I _{OD}	V _{CC} = 4.5 V, V _{IN} = 0.0 V, V _{OUT} = 2.5 V	01, 03, 04	60		mA
			02	50		
High level supply current	I _{CCH}	V _{CC} = 5.5 V	01		2.8	mA
			02		4.2	
			03		2.1	
			04		1.4	
Low level supply current	I _{CCL}	V _{CC} = 5.5 V	01		10.2	mA
			02		15.3	
			03		7.7	
			04		5.1	
Propagation delay time, high-to-low level	t _{PHL}	V _{CC} = 5.0 V, C _L = 50 pF ± 10%, R _L = 500Ω ± 5%	All	1.5	6.5	ns
Propagation delay time low-to-high level	t _{PLH}	V _{CC} = 5.0 V, C _L = 50 pF ± 10%, R _L = 500Ω ± 5%	All	2.0	7.0	ns

^{1/} Not more than one output should be shorted at a time.

TABLE II. Electrical test requirements.

MIL-PRF-38535 test requirements	Subgroups (see table III)	
	Class S devices	Class B devices
Interim electrical parameters	1	1
Final electrical test parameters	1*, 2, 3, 9, 10, 11	1*, 2, 3, 9
Group A test requirements	1, 2, 3, 9, 10, 11	1, 2, 3, 9, 10, 11
Group B electrical test parameters when using the method 5005 QCI option	1, 2, 3, 9, 10, 11	N/A
Group C end-point electrical parameters	1, 2, 3, 9, 10, 11	1, 2, 3
Group D end-point electrical parameters	1, 2, 3	1, 2, 3

*PDA applies to subgroup 1.

4.3 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-38535.

4.4 Technology Conformance inspection (TCI). Technology conformance inspection shall be in accordance with MIL-PRF-38535 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection. Group A inspection shall be in accordance with table III of MIL-PRF-38535 and as follows:

- a. Tests shall be as specified in table II herein.
- b. Subgroups 4, 5, 6, 7, and 8 shall be omitted.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of MIL-PRF-38535.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table IV of MIL-PRF-38535 and as follows:

- a. End-point electrical parameters shall be as specified in table II herein.
- b. The steady-state life test duration, test condition, and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The burn-in test circuit shall be maintained under document control by the device manufacturer's Technology Review Board (TRB) in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005 of MIL-STD-883.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table V of MIL-PRF-38535. End-point electrical parameters shall be as specified in table II herein.

4.5 Methods of inspection. Methods of inspection shall be specified and as follows:

4.5.1 Voltage and current. All voltages given are referenced to the microcircuit ground terminal. Currents given are conventional and positive when flowing into the referenced terminal.


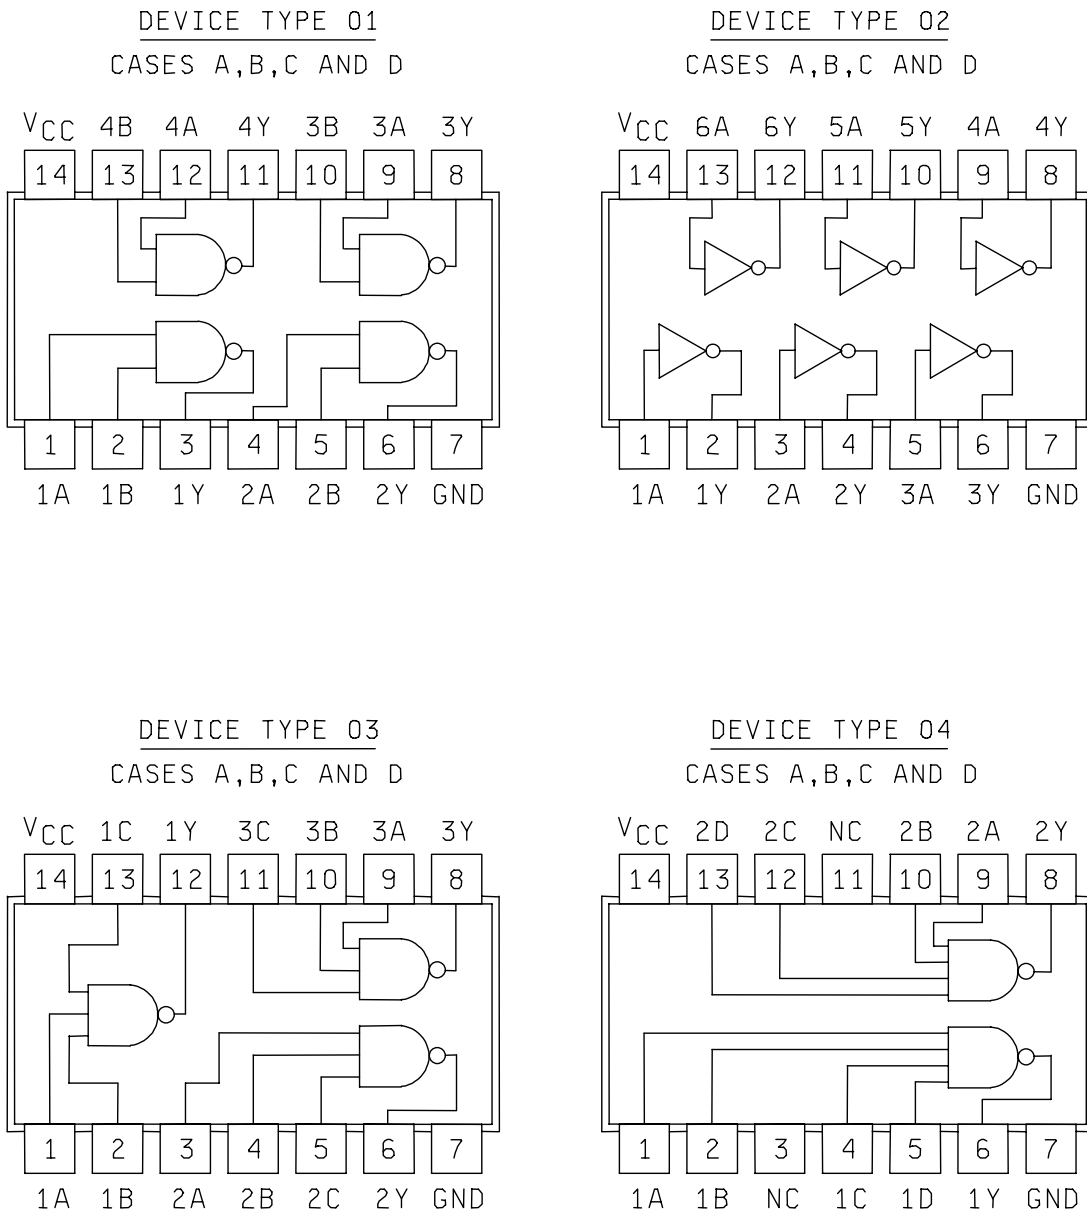


FIGURE 1. Terminal connections and logic diagrams.

MIL-M-38510/330C

DEVICE TYPE 01
CASES X AND 2

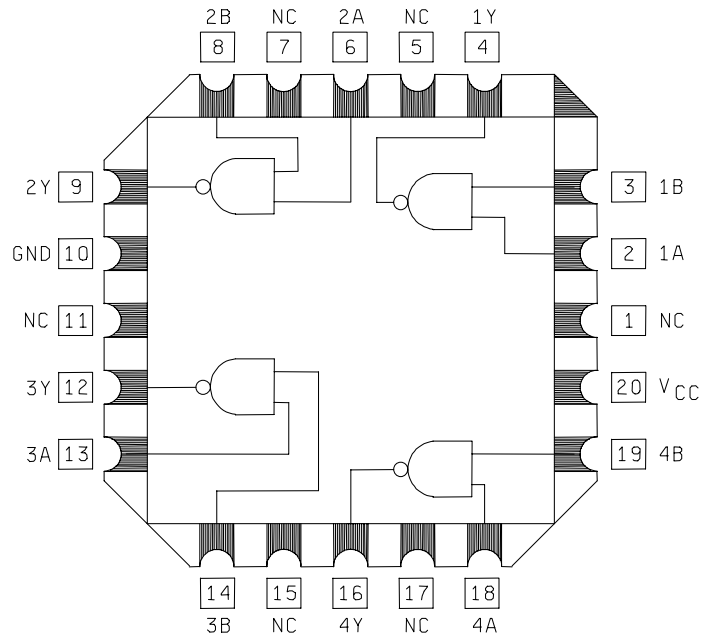

DEVICE TYPE 02
CASES X AND 2

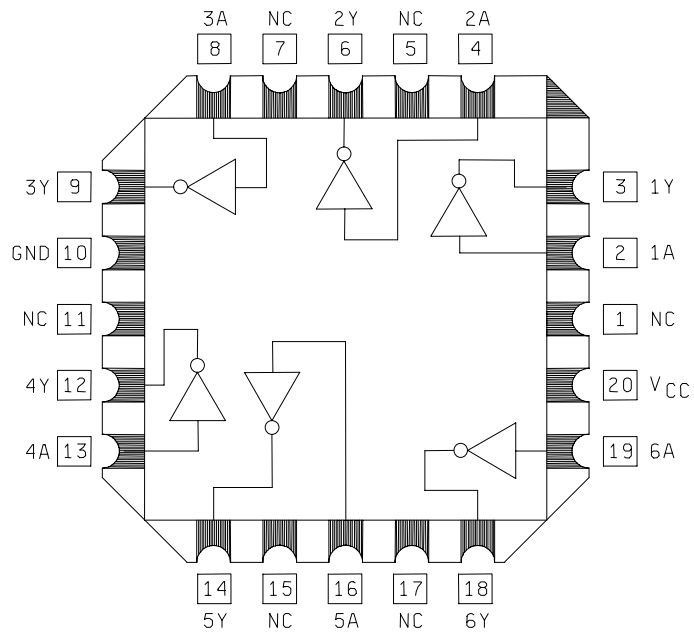


FIGURE 1. Terminal connections and logic diagrams - Continued.

MIL-M-38510/330C

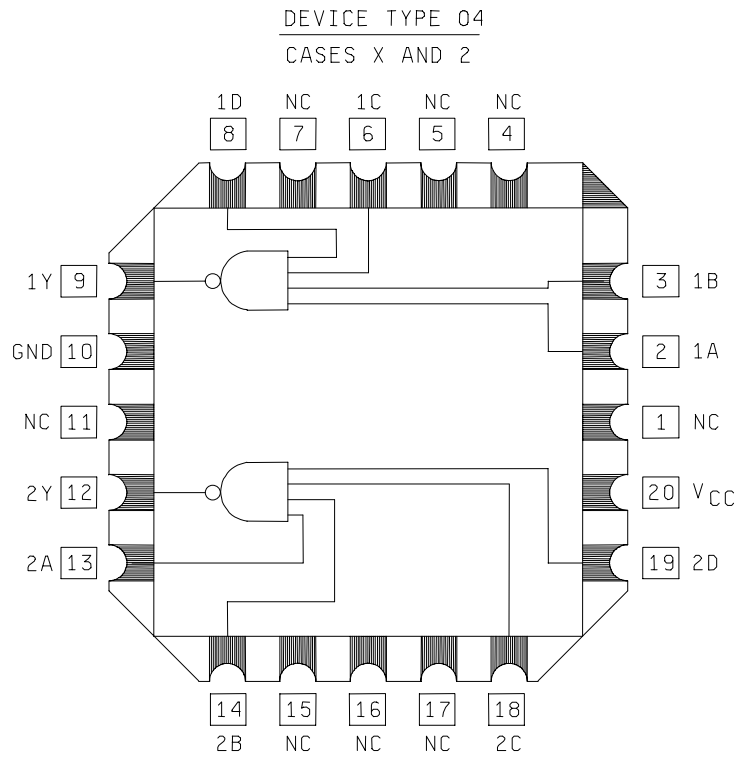
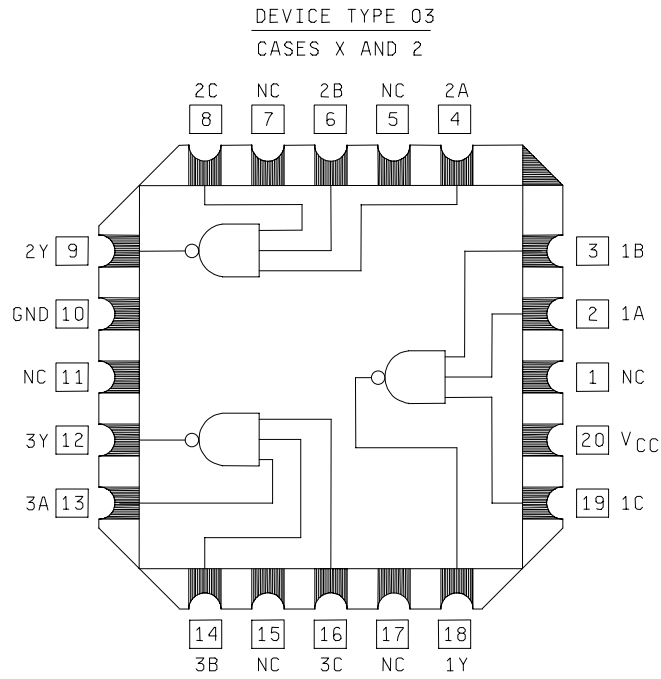


FIGURE 1. Terminal connections and logic diagrams - Continued.

Device type 01

Truth table (each gate)		
Inputs		Output
A	B	Y
L	L	H
H	L	H
L	H	H
H	H	L

Positive logic: $Y = \overline{AB}$

Device type 02

Truth table (each gate)	
Input	Output
A	Y
L	H
H	L

Positive logic: $Y = \overline{A}$

Device type 03

Truth table (each gate)			
Inputs			Output
A	B	C	Y
L	L	L	H
H	L	L	H
L	H	L	H
H	H	L	H
L	L	H	H
H	L	H	H
L	H	H	H
H	H	H	L



Positive logic: $Y = \overline{ABC}$

Device type 04

Truth table (each gate)				
Inputs				Output
A	B	C	D	Y
L	L	L	L	H
H	L	L	L	H
L	H	L	L	H
H	H	L	L	H
L	L	H	L	H
H	L	H	L	H
L	H	H	L	H
H	H	H	L	H
L	L	L	H	H
H	L	L	H	H
L	H	L	H	H
H	H	L	H	H
L	L	H	H	H
H	L	H	H	H
L	H	H	H	H
H	H	H	H	L

Positive logic: $Y = \overline{ABCD}$

FIGURE 2. Truth tables and logic equations.

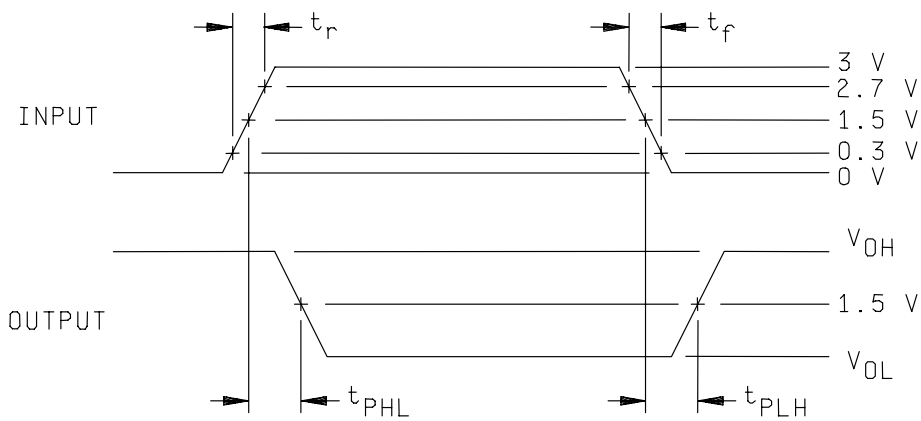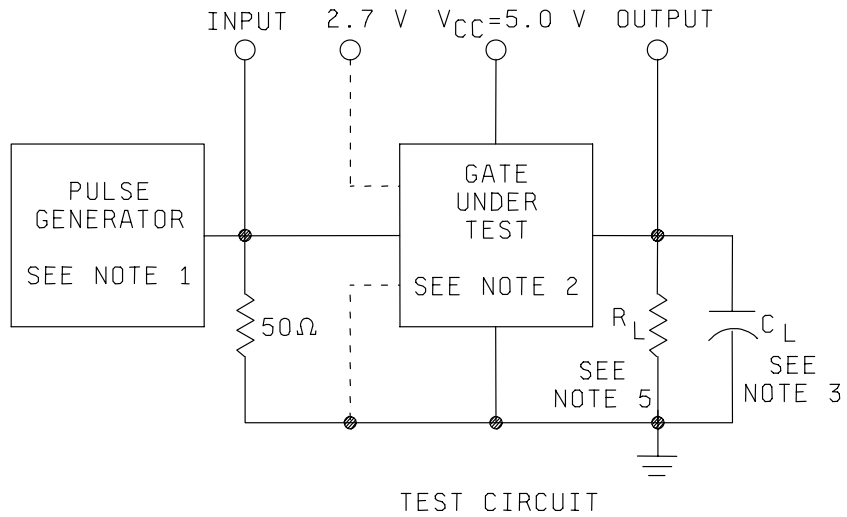

NOTES:

1. The pulse generator has the following characteristics:
 $t_r = t_f \leq 2.5 \text{ ns}$, $\text{PRR} = 1 \text{ MHz}$, and $Z_{\text{OUT}} \cong 50\Omega$.
2. Inputs not under test are at 2.7 V or GND as specified in table III.
3. $C_L = 50 \text{ pF} \pm 10\%$, including scope probe, wiring, and stray capacitance, without package in test fixture.
4. Voltage measurements are to be made with respect to network ground terminal.
5. $R_L = 500\Omega \pm 5\%$.

FIGURE 3. Switching time test circuit (all device types).

TABLE III. Group A inspection for device type 01.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit			
			Cases 1/X, 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20		Min	Max				
			Test no.	1A	1B	1Y	2A	2B	2Y	GND	3Y	3A	3B	4Y	4A	4B	V _{CC}							
1 T _c = 25°C	V _{OH}	3006	1	5.5 V	0.8 V	-1 mA												4.5 V	1Y	2.5		V		
		"	2	0.8 V	5.5 V	-1 mA													"	1Y	"		"	
		"	3				5.5 V	0.8 V	-1 mA											"	2Y	"		"
		"	4				0.8 V	5.5 V	-1 mA											"	2Y	"		"
		"	5									-1 mA	5.5 V	0.8 V						"	3Y	"		"
		"	6										-1 mA	0.8 V	5.5 V					"	3Y	"		"
		"	7													-1 mA	5.5 V	0.8 V		"	4Y	"		"
		"	8													-1 mA	0.8 V	5.5 V		"	4Y	"		"
	V _{OL}	3007	9	2.0 V	2.0 V	20 mA														"	1Y		0.5	"
		"	10				2.0 V	2.0 V	20 mA											"	2Y	"		"
		"	11									20 mA	2.0 V	2.0 V						"	3Y	"		"
		"	12												20 mA	2.0 V	2.0 V			"	4Y	"		"
	V _{IC}		13	-18 mA																"	1A		-1.2	"
			14		-18 mA															"	1B			"
			15				-18 mA													"	2A			"
			16					-18 mA												"	2B			"
			17						-18 mA											"	3A			"
			18										-18 mA							"	3B			"
			19														-18 mA			"	4A			"
			20															-18 mA		"	4B			"
	I _{IH1}	3010	21	2.7 V	GND														5.5 V	"	1A		20	μA
		"	22	GND	2.7 V															"	1B			"
		"	23				2.7 V	GND												"	2A			"
		"	24				GND	2.7 V												"	2B			"
		"	25										2.7 V	GND						"	3A			"
		"	26										GND	2.7 V						"	3B			"
		"	27													2.7 V	GND			"	4A			"
		"	28													GND	2.7 V			"	4B			"
	I _{IH2}	"	29	7.0 V	GND															"	1A		100	"
		"	30	GND	7.0 V															"	1B			"
		"	31				7.0 V	GND												"	2A			"
		"	32				GND	7.0 V												"	2B			"
		"	33										7.0 V	GND						"	3A			"
		"	34										GND	7.0 V						"	3B			"
		"	35													7.0 V	GND			"	4A			"
		"	36													GND	7.0 V			"	4B			"
	I _{IL}	3009	37	0.5 V	5.5 V															"	1A	2/	2/	mA
		"	38	5.5 V	0.5 V															"	1B	"	"	"
		"	39				0.5 V	5.5 V												"	2A	"	"	"
		"	40				5.5 V	0.5 V												"	2B	"	"	"
		"	41											0.5 V	5.5 V					"	3A	"	"	"
		"	42											5.5 V	0.5 V					"	3B	"	"	"
		"	43													0.5 V	5.5 V			"	4A	"	"	"
		"	44													5.5 V	0.5 V			"	4B	"	"	"
	I _{OS}	3011	45	GND	GND	0.0 V														"	1Y	-60	-150	"
		"	46				GND	GND	0.0 V											"	2Y	"	"	"
		"	47									0.0 V	GND	GND						"	3Y	"	"	"
		"	48												0.0 V	GND	GND			"	4Y	"	"	"

See footnotes at end of device type 01

TABLE III. Group A inspection for device type 01 – Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit					
			Cases 1/X, 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20		Min	Max						
			Test no.	1A	1B	1Y	2A	2B	2Y	GND	3Y	3A	3B	4Y	4A	4B	V _{CC}									
1 T _C = 25°C	I _{OD}		49	5.5 V	5.5 V	2.5 V					GND							4.5 V	1Y	60		mA				
			50				5.5 V	5.5 V	2.5 V												2Y					
			51										2.5 V	5.5 V	5.5 V						3Y					
			52													2.5 V	5.5 V	5.5 V			4Y					
	I _{CC}	3005	53	GND	GND		GND	GND					GND	GND				GND	GND	5.5 V	V _{CC}		2.8	"		
I _{CCL}	3005	54	5.5 V	5.5 V		5.5 V	5.5 V					5.5 V	5.5 V				5.5 V	5.5 V	5.5 V	V _{CC}		10.2	"			
2	Same tests, terminal conditions and limits as for subgroup 1, except T _C = +125°C and V _{IC} tests are omitted.																									
3	Same tests, terminal conditions and limits as for subgroup 1, except T _C = 55°C and V _{IC} tests are omitted.																									
9 T _C = 25°C	t _{PHL}	3003 Fig. 3	55	IN	2.7 V	OUT					GND							5.0 V	1A to 1Y	1.5	4.3	ns				
			56	2.7 V	IN	OUT															1B to 1Y	"	"	"		
			57				IN	2.7 V	OUT													2A to 2Y	"	"	"	
			58				2.7 V	IN	OUT													2B to 2Y	"	"	"	
			59										OUT	IN	2.7 V							3A to 3Y	"	"	"	
			60										OUT	2.7 V	IN							3B to 3Y	"	"	"	
			61													OUT	IN	2.7 V				4A to 4Y	"	"	"	
	62													OUT	2.7 V	IN				4B to 4Y	"	"	"			
	t _{PLH}	"	"	63	IN	2.7 V	OUT					"									1A to 1Y	2.4	5.0	"		
				64	2.7 V	IN	OUT															1B to 1Y	"	"	"	
				65				IN	2.7 V	OUT													2A to 2Y	"	"	"
				66				2.7 V	IN	OUT													2B to 2Y	"	"	"
				67										OUT	IN	2.7 V							3A to 3Y	"	"	"
68													OUT	2.7 V	IN							3B to 3Y	"	"	"	
10	t _{PHL}	"	71-78	Same tests and terminal conditions as for subgroup 9, except T _C = +125°C															1.5	6.5	"					
	t _{PLH}	"	79-86																2.0	7.0	"					
11	Same tests, terminal conditions and limits as for subgroup 10, except T _C = -55°C.																									

1/ Pins not referenced (i.e., 1, 5, 7, 11, 15, and 17) are N/C.

2/ I_{IL} limits shall be as follows:

Parameters	Min/Max limits in mA for circuit			
	A	B	C	D
I _{IL}	-0.25/-0.60	-0.03/-0.06	-0.03/-0.60	0/-0.30

TABLE III. Group A inspection for device type 02.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit			
			Cases 1/X, 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20		Min	Max				
			Test no.	1A	1Y	2A	2Y	3A	3Y	GND	4Y	4A	5Y	5A	6Y	6A	V _{CC}							
1 T _C = 25°C	V _{OH}	3006	1	0.8 V	-1 mA													4.5 V	1Y	2.5		V		
		"	2			0.8 V	-1 mA												"	2Y	"		"	
		"	3					0.8 V	-1 mA											"	3Y	"		"
		"	4									-1 mA	0.8 V							"	4Y	"		"
		"	5											-1 mA	0.8 V					"	5Y	"		"
		"	6													-1 mA	0.8 V			"	6Y	"		"
	V _{OL}	3007	7	2.0 V	20 mA															1Y		0.5	"	
		"	8			2.0 V	20 mA													"	2Y	"		"
		"	9					2.0 V	20 mA											"	3Y	"		"
		"	10									20 mA	2.0 V							"	4Y	"		"
		"	11											20 mA	2.0 V					"	5Y	"		"
		"	12													20 mA	2.0 V			"	6Y	"		"
	V _{IC}		13	-18 mA																"	1A		-1.2	"
			14			-18 mA														"	2A			"
			15					-18 mA												"	3A			"
			16									-18 mA								"	4A			"
			17											-18 mA						"	5A			"
			18														-18 mA			"	6A			"
	I _{IH1}	3010	19	2.7 V															5.5 V	1A		20	μA	
		"	20			2.7 V														"	2A			"
		"	21					2.7 V												"	3A			"
		"	22									2.7 V								"	4A			"
		"	23											2.7 V						"	5A			"
		"	24													2.7 V				"	6A			"
	I _{IH2}	"	25	7.0 V																"	1A		100	"
		"	26			7.0 V														"	2A			"
		"	27					7.0 V												"	3A			"
		"	28									7.0 V								"	4A			"
		"	29											7.0 V						"	5A			"
		"	30													7.0 V				"	6A			"
	I _{IL}	3009	31	0.5 V																"	1A	2/	2/	mA
		"	32				0.5 V													"	2A			"
		"	33					0.5 V												"	3A			"
		"	34										0.5 V							"	4A			"
		"	35											0.5 V						"	5A			"
		"	36													0.5 V				"	6A			"
	I _{OS}	3011	37	GND	0.0 V															"	1Y	-60	-150	"
		"	38			GND	0.0 V													"	2Y	"	"	"
		"	39					GND	0.0 V											"	3Y	"	"	"
		"	40									0.0 V	GND							"	4Y	"	"	"
		"	41											0.0 V	GND					"	5Y	"	"	"
		"	42													0.0 V	GND			"	6Y	"	"	"

See footnotes at end of device type 02

TABLE III. Group A inspection for device type 02 – Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit			
			Cases 1/X, 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20		Min	Max				
			Test no.	1A	1Y	2A	2Y	3A	3Y	GND	4Y	4A	5Y	5A	6Y	6A	V _{CC}							
1 T _C = 25°C	I _{OD}		43	5.5 V	2.5 V						GND							4.5 V	1Y	60	mA			
			44			5.5 V	2.5 V													"	2Y	"	"	
			45					5.5 V	2.5 V											"	3Y	"	"	
			46							5.5 V	2.5 V	"								"	4Y	"	"	
			47									"	2.5 V	5.5 V						"	5Y	"	"	
			48									"			2.5 V	5.5 V		2.5 V	5.5 V	"	6Y	"	"	
	I _{OCH}	3005	49	GND		GND		GND		"		GND		GND		GND	5.5 V	V _{CC}		4.2	"			
	I _{OCL}	3005	50	5.5 V		5.5 V		5.5 V		"		5.5 V		5.5 V		5.5 V	5.5 V	V _{CC}		15.3	"			
2	Same tests, terminal conditions and limits as for subgroup 1, except T _C = +125°C and V _{IC} tests are omitted.																							
3	Same tests, terminal conditions and limits as for subgroup 1, except T _C = 55°C and V _{IC} tests are omitted.																							
9 T _C = 25°C	t _{PHL}	3003 Fig. 3	51	IN	OUT						GND							5.0 V	1A to 1Y	1.5	4.3	ns		
			52			IN	OUT				"								"	2A to 2Y	"	"	"	
			53					IN	OUT		"								"	3A to 3Y	"	"	"	
			54							IN	OUT	"	OUT	IN					"	4A to 4Y	"	"	"	
			55									"			OUT	IN			"	5A to 5Y	"	"	"	
			56									"					OUT	IN	"	6A to 6Y	"	"	"	
	t _{PLH}			57	IN	OUT					"								"	1A to 1Y	2.4	5.0	"	
				58			IN	OUT				"								"	2A to 2Y	"	"	"
				59					IN	OUT		"								"	3A to 3Y	"	"	"
				60							IN	OUT	"	OUT	IN					"	4A to 4Y	"	"	"
10	t _{PHL}		63-68	Same tests and terminal conditions as for subgroup 9, except T _C = +125°C															1.5	6.5	"			
			69-74	2.0	7.0	"																		
11	Same tests, terminal conditions and limits as for subgroup 10, except T _C = -55°C.																							

1/ Pins not referenced (i.e., 1, 5, 7, 11, 15, and 17) are N/C.

2/ I_{IL} limits shall be as follows:

Parameters	Min/Max limits in mA for circuit			
	A	B	C	D
I _{IL}	-0.25/-0.60	-0.03/-0.06	-0.03/-0.60	0/-0.30

TABLE III. Group A inspection for device type 03.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit				
			Case 1/ X, 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20		Min	Max					
			Test no.	1A	1B	2A	2B	2C	2Y	GND	3Y	3A	3B	3C	1Y	1C	V _{CC}								
1 T _C = 25°C	V _{OH}	3006	1	0.8 V	5.5 V													1Y	2.5		V				
		"	2	5.5 V	0.8 V														"			"			
		"	3	5.5 V	5.5 V														"				"		
		"	4			0.8 V	5.5 V	5.5 V	-1 mA										"				"		
		"	5				5.5 V	0.8 V	5.5 V										"				"		
		"	6				5.5 V	5.5 V	0.8 V										"				"		
		"	7																"				"		
		"	8																"				"		
		"	9																"				"		
	V _{OL}	3007	10	2.0 V	2.0 V														1Y		0.5	"			
		"	11			2.0 V	2.0 V	2.0 V	20 mA										"				"		
		"	12																"				"		
	V _{IC}		13	-18 mA															"				"		
			14		-18 mA														"				"		
			15			-18 mA													"				"		
			16				-18 mA													"				"	
			17					-18 mA												"				"	
			18																	"				"	
			19																	"				"	
			20																	"				"	
			21																	"				"	
			I _{IH1}	3010	22	2.7 V	GND														"				"
				"	23	GND	2.7 V														"				"
	"	24		GND	GND														"				"		
	"	25				2.7 V	GND	GND											"				"		
	"	26					GND	2.7 V	GND										"				"		
	"	27					GND	GND	2.7 V										"				"		
	"	28																	"				"		
	"	29																	"				"		
	"	30																	"				"		
	I _{IH2}			31	7.0 V	GND														"				"	
			32	GND	7.0 V															"				"	
			33	GND	GND															"				"	
			34			7.0 V	GND	GND												"				"	
			35				GND	7.0 V	GND											"				"	
			36				GND	GND	7.0 V											"				"	
			37																	"				"	
			38																	"				"	
			39																	"				"	
	I _{IL1}	3009	40	0.5 V	5.5 V														"				"		
		"	41	5.5 V	0.5 V														"				"		
		"	42	5.5 V	5.5 V														"				"		
		"	43			0.5 V	5.5 V	5.5 V											"				"		
		"	44				5.5 V	0.5 V	5.5 V										"				"		
		"	45				5.5 V	5.5 V	0.5 V										"				"		
		"	46																"				"		
		"	47																"				"		
		"	48																"				"		

See footnotes at end of device type 03.

TABLE III. Group A inspection for device type 03 – Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit		
			Case 1/ X, 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20		Min	Max			
			Test no.	1A	1B	2A	2B	2C	2Y	GND	3Y	3A	3B	3C	1Y	1C	V _{CC}						
1 T _C = 25°C	I _{OS}	3011	49	GND	GND										0.0 V	GND	5.5 V	1Y	-60	-150	mA		
		"	50			GND	GND	GND	0.0 V	"								"	2Y	"	"	"	
		"	51								"	0.0 V	GND	GND	GND			"	3Y	"	"	"	
	I _{OD}		52	5.5 V	5.5 V						"					2.5 V	5.5 V	4.5 V	1Y	60		"	
			53			5.5 V	5.5 V	5.5 V	2.5 V		"								"	2Y	"	"	"
			54								"	2.5 V	5.5 V	5.5 V	5.5 V				"	3Y	"	"	"
	I _{CC,H}	3005	55	GND	GND	GND	GND	GND		"		GND	GND	GND		GND	5.5 V	V _{CC}		2.1	"		
I _{CC,L}	3005	56	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V		"		5.5 V	5.5 V	5.5 V		5.5 V	5.5 V	V _{CC}		7.7	"			
2	Same tests, terminal conditions and limits as for subgroup 1, except T _C = 125°C, and V _{IC} tests are omitted.																						
3	Same tests, terminal conditions and limits as for subgroup 1, except T _C = -55°C, and V _{IC} tests are omitted.																						
9 T _C = 25°C	t _{PHL}	3003 Fig. 3	57	IN	2.7 V						GND					OUT	2.7 V	5.0 V	1A to 1Y	1.5	4.3	ns	
			58	2.7 V	IN							"					"	2.7 V	"	1B to 1Y	"	"	"
			59	2.7 V	2.7 V							"					"	IN	"	1C to 1Y	"	"	"
			60			IN	2.7 V	2.7 V	OUT	"	"						"	"	"	2A to 2Y	"	"	"
			61			2.7 V	IN	2.7 V	"	"		"					"	"	"	2B to 2Y	"	"	"
			62			2.7 V	2.7 V	IN	"	"		"					"	"	"	2C to 2Y	"	"	"
			63								"	OUT	IN	2.7 V	2.7 V		"	"	"	3A to 3Y	"	"	"
			64								"	"	2.7 V	IN	2.7 V		"	"	"	3B to 3Y	"	"	"
			65								"	"	2.7 V	2.7 V	IN		"	"	"	3C to 3Y	"	"	"
	t _{PLH}		66	IN	2.7 V						GND					OUT	2.7 V	"	1A to 1Y	2.4	5.0	"	
			67	2.7 V	IN						"					"	2.7 V	"	1B to 1Y	"	"	"	
			68	2.7 V	2.7 V						"					"	IN	"	1C to 1Y	"	"	"	
			69			IN	2.7 V	2.7 V	OUT	"	"					"	"	"	2A to 2Y	"	"	"	
			70			2.7 V	IN	2.7 V	"	"		"				"	"	"	2B to 2Y	"	"	"	
			71			2.7 V	2.7 V	IN	"	"		"				"	"	"	2C to 2Y	"	"	"	
72								"	OUT	IN	2.7 V	2.7 V		"	"	"	3A to 3Y	"	"	"			
73								"	"	2.7 V	IN	2.7 V		"	"	"	3B to 3Y	"	"	"			
74								"	"	2.7 V	2.7 V	IN		"	"	"	3C to 3Y	"	"	"			
10	t _{PHL}	"	75-83	Same tests and terminal conditions as for subgroup 9, except T _C = 125°C																1.5	6.5	"	
	t _{PLH}	"	84-92																	2.0	7.0	"	
11	Same tests, terminal conditions and limits as for subgroup 10, except T _C = -55°C.																						

1/ Pins not referenced (i.e., 1, 5, 7, 11, 15, and 17) are NC.

2/ I_{IL} limits shall be as follows:

Parameters	Min/Max limits in mA for circuit			
	A	B	C	D
I _{IL1}	-0.25/-0.60	-0.03/-0.06	-0.03/-0.60	0/-0.30

TABLE III. Group A inspection for device type 04.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit			
			Case 1/ X, 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20		Min	Max				
			Test no.	1A	1B	NC	1C	1D	1Y	GND	2Y	2A	2B	NC	2C	2D	V _{CC}							
1 T _c = 25°C	V _{OH}	3006	1	0.8 V	5.5 V		5.5 V	5.5 V	-1 mA	GND								4.5 V	1Y	2.5		V		
		"	2	5.5 V	0.8 V		5.5 V	"	"	"								"	1Y	"		"		
		"	3	"	5.5 V		0.8 V	"	"	"									"	1Y	"		"	
		"	4	"	5.5 V		5.5 V	0.8 V	"	"									"	1Y	"		"	
		"	5								"	-1 mA	0.8 V	5.5 V		5.5 V	5.5 V	"	"	2Y	"		"	
		"	6								"	"	5.5 V	0.8 V		5.5 V	"	"	"	2Y	"		"	
		"	7								"	"	"	5.5 V		0.8 V	"	"	"	2Y	"		"	
		"	8								"	"	"	5.5 V		5.5 V	0.8 V	"	"	2Y	"		"	
	V _{OL}	3007	9	2.0 V	2.0 V		2.0 V	2.0 V	20 mA	"									"	1Y		0.5	"	
		3007	10							"	20 mA	2.0 V	2.0 V			2.0 V	2.0 V	"	"	2Y		0.5	"	
	V _{IC}			11	-18 mA						"								"	1A		-1.2	"	
				12		-18 mA						"								"	1B			"
				13				-18 mA			"									"	1C			"
				14					-18 mA		"									"	1D			"
				15							"		-18 mA							"	2A			"
				16							"			-18 mA						"	2B			"
				17							"						-18 mA			"	2C			"
				18							"							-18 mA		"	2D			"
	I _{IH1}	3010		19	2.7 V	GND		GND	GND		"								5.5 V	1A		20	μA	
				20	GND	2.7 V		GND	"		"									"	1B			"
				21	"	GND		2.7 V	"		"									"	1C			"
				22	"	GND		GND	2.7 V		"									"	1D			"
				23							"		2.7 V	GND		GND	GND	"	"	"	2A			"
				24							"		GND	2.7 V		GND	"	"	"	"	2B			"
				25							"		"	GND		2.7 V	"	"	"	"	2C			"
				26							"		"	GND		GND	2.7 V	"	"	"	2D			"
	I _{IH2}			27	7.0 V	GND		GND	GND		"								"	1A		100	"	
				28	GND	7.0 V		GND	"		"									"	1B			"
				29	"	GND		7.0 V	"		"									"	1C			"
				30	"	GND		GND	7.0 V		"									"	1D			"
				31							"			7.0 V	GND		GND	GND	"	"	2A			"
				32							"			GND	7.0 V		GND	"	"	"	2B			"
				33							"			"	GND		7.0 V	"	"	"	2C			"
				34							"			"	GND		GND	7.0 V	"	"	2D			"
	I _{IL}	3009		35	0.5 V	5.5 V		5.5 V	5.5 V		"								"	1A	2/	2/	mA	
				36	5.5 V	0.5 V		5.5 V	"		"									"	1B			"
				37	"	5.5 V		0.5 V	"		"									"	1C			"
				38	"	5.5 V		5.5 V	0.5 V		"									"	1D			"
				39							"			0.5 V	5.5 V		5.5 V	5.5 V	"	"	2A			"
				40							"			5.5 V	0.5 V		5.5 V	"	"	"	2B			"
				41							"			"	5.5 V		0.5 V	"	"	"	2C			"
				42							"			"	5.5 V		5.5 V	0.5 V	"	"	2D			"
	I _{OS}	3011	43	GND	GND		GND	GND	0.0 V	"									"	1Y	-60	-150	"	
		3011	44							"	0.0 V	GND	GND			GND	GND	"	"	2Y	-60	-150	"	

See footnotes at end of device type 04.

TABLE III. Group A inspection for device type 04 – Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit		
			Case 1/ X, 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20		Min	Max			
			Test no.	1A	1B	NC	1C	1D	1Y	GND	2Y	2A	2B	NC	2C	2D	V _{CC}		1Y	2Y		V _{CC}	V _{CC}
1 T _C = 25°C	I _{OD}		45	5.5 V	5.5 V		5.5 V	5.5 V	2.5 V	"							4.5 V	1Y	60		mA		
			46								2.5 V	5.5 V	5.5 V			5.5 V	5.5 V	4.5 V	2Y	60		"	
	I _{CC H}	3005	47	GND	GND		GND	GND		"		GND	GND		GND	GND	5.5 V	V _{CC}		1.4	"		
	I _{CC L}	3005	48	5.5 V	5.5 V		5.5 V	5.5 V		"		5.5 V	5.5 V		5.5 V	5.5 V	5.5 V	V _{CC}		5.1	"		
2	Same tests, terminal conditions and limits as for subgroup 1, except T _C = 125° C, and V _{IC} tests are omitted.																						
3	Same tests, terminal conditions and limits as for subgroup 1, except T _C = -55° C, and V _{IC} tests are omitted.																						
9 T _C = 25°C	t _{PHL}	3003 Fig. 3	49	IN	2.7 V		2.7 V	2.7 V	OUT	GND							5.0 V	1A to 1Y	1.5	4.3	ns		
			50	2.7 V	IN		2.7 V	"	"	"								"	1B to 1Y	"	"	"	
			51	"	2.7 V		IN	"	"	"								"	1C to 1Y	"	"	"	
			52	"	2.7 V		2.7 V	IN	"	"								"	1D to 1Y	"	"	"	
			53									OUT	IN	2.7 V		2.7 V	2.7 V	"	2A to 2Y	"	"	"	
			54									"	"	2.7 V	IN	2.7 V	"	"	2B to 2Y	"	"	"	
	t _{PLH}	"	"	57	IN	2.7 V		2.7 V	2.7 V	OUT	"							"	1A to 1Y	2.4	5.0	"	
				58	2.7 V	IN		2.7 V	"	"	"							"	1B to 1Y	"	"	"	
				59	"	2.7 V		IN	"	"	"							"	1C to 1Y	"	"	"	
				60	"	2.7 V		2.7 V	IN	"	"							"	1D to 1Y	"	"	"	
				61									OUT	IN	2.7 V		2.7 V	2.7 V	"	2A to 2Y	"	"	"
				62									"	"	2.7 V	IN	2.7 V	"	"	2B to 2Y	"	"	"
10	t _{PHL}	"	65-72	Same tests and terminal conditions as for subgroup 9, except T _C = 125°C															1.5	6.5	"		
	t _{PLH}	"	73-80																2.0	7.0	"		
11	Same tests, terminal conditions and limits as for subgroup 10, except T _C = -55° C.																						

1/ Pins not referenced (i.e., 1, 5, 7, 11, 15, and 17) are NC.

2/ I_{IL} limits shall be as follows:

Parameters	Min/Max limits in mA for circuit			
	A	B	C	D
I _{IL1}	-0.25/-0.60	-0.03/-0.06	-0.03/-0.60	0/-0.30

5. PACKAGING

5.1 Packaging requirements. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Service or Defense Agency, or within the military service's system command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

6.1 Intended use. Microcircuits conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

- a. Title, number, and date of the specification.
- b. PIN and compliance identifier, if applicable (see 1.2).
- c. Requirements for delivery of one copy of the conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.
- d. Requirements for certificate of compliance, if applicable.
- e. Requirements for notification of change of product or process to contracting activity in addition to notification to the qualifying activity, if applicable.
- f. Requirements for failure analysis (including required test condition of method 5003 of MIL-STD-883), corrective action, and reporting of results, if applicable.
- g. Requirements for product assurance options.
- h. Requirements for special carriers, lead lengths, or lead forming, if applicable. These requirements should not affect the part number. Unless otherwise specified, these requirements will not apply to direct purchase by or direct shipment to the Government.
- i. Requirements for "JAN" marking.
- j. Packaging requirements (see 5.1).

6.3 Superseding information. The requirements of MIL-M-38510 have been superseded to take advantage of the available Qualified Manufacturer Listing (QML) system provided by MIL-PRF-38535. Previous references to MIL-M-38510 in this document have been replaced by appropriate references to MIL-PRF-38535. All technical requirements now consist of this specification and MIL-PRF-38535. The MIL-M-38510 specification sheet number and PIN have been retained to avoid adversely impacting existing government logistics systems and contractor's parts lists.

6.4 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List QML-38535 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DSCC-VQ, 3990 E. Broad Street, Columbus, Ohio 43123-1199.

6.5 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-PRF-38535, MIL-HDBK-1331, and as follows:

- GND Ground zero voltage potential
- I_{IN} Current flowing into an input terminal
- V_{IN} Voltage level at an input terminal

6.6 Logistic support. Lead materials and finishes (see 3.3) are interchangeable. Unless otherwise specified, microcircuits acquired for Government logistic support will be acquired to device class B (see 1.2.2), lead material and finish A (see 3.3). Longer length leads and lead forming should not affect the part number.

6.7 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-35810 device types and may have slight physical variations in relation to case size. The presence of this information should not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-PRF-38535.

Military device type	Generic-industry type
01	54F00
02	54F04
03	54F10
04	54F20

6.8 Manufacturers' designation. Manufacturers' circuits which form a part of this specification are designated with an "X" as shown in table IV herein.

TABLE IV. Manufacturers' designations.

Device type	Manufacturer's designation			
	Circuit A	Circuit B	Circuit C	Circuit D
	National Semi/ Fairchild	Motorola Inc.	Signetics Corp.	Texas Instruments
01	X	X		X
02	X	X		X
03	X	X		X
04	X	X		X

6.9 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:

Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5962-2000)

Review activities:

Army - MI, SM
Navy - AS, CG, MC, SH, TD
Air Force - 03, 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at www.dodssp.daps.mil.