

REVISIONS			
LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED
A	Pg 2: Added outline letter X. Pg 6: Added package X. Pg 10: Added package X.	78-05-17	N. A. Hauck
B	Pg 2, 4, 11: Added device 02.	79-04-12	N. A. Hauck
C	Pg 2, 4, 5, 8, 12: Added device 03. Pg 10: Correct table II. Pg 11: Correct 6.3	80-04-21	N. A. Hauck
D	Format changes. Table I corrections. Delete device 03 in X package.	80-10-02	N. A. Hauck
E	Table I and II corrections. Change package designations for all devices. Add device 04.	81-10-09	N. A. Hauck
F	Table I and II corrections, changed to approved source, and general update to document.	83-03-03	N. A. Hauck
G	Add one vendor, CAGE 34333. Add two packages, C-2 and D-4. Make changes to 1.3, 4.3.1, table I, table II, and figure 1. Change to military drawing format. Delete one vendor, CAGE 04713.	90-02-01	M. A. Frye
H	Drawing updated to reflect current requirements. - ro	01-06-20	R. Monnin
J	Add information to paragraph 3.5. - ro	04-04-02	R. Monnin
K	Correction to paragraph 3.5. Editorial changes throughout. - drw	05-06-10	R. Monnin
L	Update drawing to current MIL-PRF-38535 requirements. -rrp	14-06-19	C. SAFFLE

CURRENT CAGE CODE 67268


THE ORIGINAL FIRST SHEET OF THIS DRAWING HAS BEEN REPLACED.

REV																					
SHEET																					
REV																					
SHEET																					
REV STATUS OF SHEETS	REV	L	L	L	L	L	L	L	L	L											
	SHEET	1	2	3	4	5	6	7	8												
PMIC N/A	PREPARED BY WILLIAM E. SHOUP	DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990 http://www.landandmaritime.dla.mil MICROCIRCUIT, LINEAR, HIGH VOLTAGE OPERATIONAL AMPLIFIER, MONOLITHIC SILICON																			
STANDARD MICROCIRCUIT DRAWING THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE AMSC N/A	CHECKED BY A.J. FOLEY																				
	APPROVED BY N. A. HAUCK																				
	DRAWING APPROVAL DATE 78-03-27																				
	REVISION LEVEL L	SIZE A	CAGE CODE 14933	78003																	
		SHEET		1 OF 8																	

1. SCOPE

1.1 Scope. This drawing describes device requirements for MIL-STD-883 compliant, non-JAN class level B microcircuits in accordance with MIL-PRF-38535, appendix A.

1.2 Part or Identifying Number (PIN). The complete PIN is as shown in the following example:

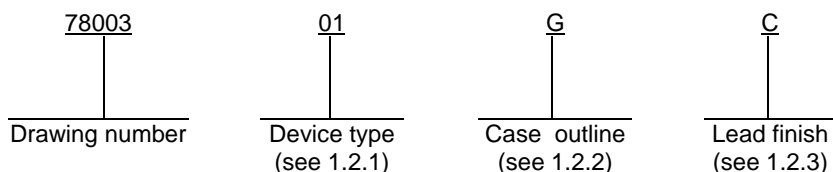

1.2.1 Device type(s). The device type(s) identify the circuit function as follows:

<u>Device type</u>	<u>Generic number</u>	<u>Circuit function</u>
01	LM144	High voltage operational amplifier
02	2640	High voltage operational amplifier
03	LM143	High voltage operational amplifier
04	1536	High voltage operational amplifier

1.2.2 Case outline(s). The case outline(s) are as designated in MIL-STD-1835 and as follows:

<u>Outline letter</u>	<u>Descriptive designator</u>	<u>Terminals</u>	<u>Package style</u>
G	MACY1-X8	8	Can
P	GDIP1-T8 or CDIP2-T8	8	Dual-in-line
X	MACY1-X8	8	Can
2	CQCC1-N20	20	Square leadless chip carrier

1.2.3 Lead finish. The lead finish is as specified in MIL-PRF-38535, appendix A.

1.3 Absolute maximum ratings.

Supply voltage (V_S):

Positive supply voltage:

Device types 01, 03, and 04	+40 V dc
Device type 02	+50 V dc

Negative supply voltage:

Device types 01, 03, and 04	-40 V dc
Device type 02	-50 V dc

Differential input voltage:

Device types 01, 03, and 04	80 V dc
Device type 02	100 V dc

Internal power dissipation 680 mW 1/ 2/

Input voltage ±40 V dc 3/

Output short circuit duration 5 seconds

Storage temperature range -65°C to +150°C

Lead temperature (soldering, 10 seconds) +300°C

Junction resistance (T_J) +175°C

Thermal resistance, junction-to-case (θ_{JC}) See MIL-STD-1835

1/ Derate above +75°C, cases G and X are at 9.3 mW/°C, case P at 8.0 mW/°C, and case 2 at 11.4 mW/°C.

2/ Must withstand the added P_D due to short circuit test, e.g., I_{OS}.

3/ For supply voltage less than ±40 V, the absolute maximum input voltage is equal to the supply voltage.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A	REVISION LEVEL L	78003 SHEET 2
--	------------------	----------------------------	---------------------------------------

1.4 Recommended operating conditions.

Positive supply voltage:
 Device types 01, 03, and 04 +40 V dc
 Device type 02 +50 V dc
 Negative supply voltage:
 Device types 01, 03, and 04 -40 V dc
 Device type 02 -50 V dc
 Ambient operating temperature range (T_A) -55°C to +125°C

2. APPLICABLE DOCUMENTS

2.1 Government specification, standards, and handbooks. The following specification, standards, and handbooks form a part of this drawing to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATION

MIL-PRF-38535 - Integrated Circuits, Manufacturing, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-883 - Test Method Standard Microcircuits.
 MIL-STD-1835 - Interface Standard Electronic Component Case Outlines.

DEPARTMENT OF DEFENSE HANDBOOKS

MIL-HDBK-103 - List of Standard Microcircuit Drawings.
 MIL-HDBK-780 - Standard Microcircuit Drawings.

(Copies of these documents are available online at <http://quicksearch.dla.mil/> or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094).

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Item requirements. The individual item requirements shall be in accordance with MIL-PRF-38535, appendix A for non-JAN class level B devices and as specified herein. Product built to this drawing that is produced by a Qualified Manufacturer Listing (QML) certified and qualified manufacturer or a manufacturer who has been granted transitional certification to MIL-PRF-38535 may be processed as QML product in accordance with the manufacturers approved program plan and qualifying activity approval in accordance with MIL-PRF-38535. This QML flow as documented in the Quality Management (QM) plan may make modifications to the requirements herein. These modifications shall not affect form, fit, or function of the device. These modifications shall not affect the PIN as described herein. A "Q" or "QML" certification mark in accordance with MIL-PRF-38535 is required to identify when the QML flow option is used.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38535, appendix A and herein.

3.2.1 Case outline(s). The case outline(s) shall be in accordance with 1.2.2 herein.

3.2.2 Terminal connections. The terminal connections shall be as specified on figure 1.

3.3 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and shall apply over the full ambient operating temperature range.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		78003
		REVISION LEVEL L	SHEET 3

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table I.

3.5 Marking. Marking shall be in accordance with MIL-PRF-38535, appendix A. The part shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's PIN may also be marked. For packages where marking of the entire SMD PIN number is not feasible due to space limitations, the manufacturer has the option of not marking the "5962-" on the device.

3.5.1 Certification/compliance mark. A compliance indicator "C" shall be marked on all non-JAN devices built in compliance to MIL-PRF-38535, appendix A. The compliance indicator "C" shall be replaced with a "Q" or "QML" certification mark in accordance with MIL-PRF-38535 to identify when the QML flow option is used.

3.6 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-HDBK-103 (see 6.6 herein). The certificate of compliance submitted to DLA Land and Maritime -VA prior to listing as an approved source of supply shall affirm that the manufacturer's product meets the requirements of MIL-PRF-38535, appendix A and the requirements herein.

3.7 Certificate of conformance. A certificate of conformance as required in MIL-PRF-38535, appendix A shall be provided with each lot of microcircuits delivered to this drawing.

3.8 Notification of change. Notification of change to DLA Land and Maritime -VA shall be required for any change that affects this drawing.

3.9 Verification and review. DLA Land and Maritime, DLA Land and Maritime's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

4. VERIFICATION

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-PRF-38535, appendix A.

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:

a. Burn-in test, method 1015 of MIL-STD-883.

(1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1015 of MIL-STD-883.

(2) $T_A = +125^\circ\text{C}$, minimum.

b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		78003
		REVISION LEVEL L	SHEET 4

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions ^{1/} -55°C ≤ T _A ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Input offset voltage	V _{IO}		1	01, 03, 04		±5	mV
			2, 3			±7	
			1	02		±4	
			2, 3			±6	
Input offset current	I _{IO}		1	01, 03, 04		±3	nA
			2, 3			±7	
			1	02		±12	
			2, 3			±35	
Input bias current	I _{IB}		1	01, 03, 04		±20	nA
			2, 3			±35	
			1	02		±25	
			2, 3			±50	
Supply voltage rejection ratio	SVRR		4, 5, 6	All		100	μV/V
Output voltage swing	V _O		1, 2, 3	01, 03, 04	±22		V
			1		04	±30	
			1, 2, 3	02	±35		
Large signal voltage gain	A _{VOL}	V _O = ±10 V, R _L = 2 kΩ, T _A = +25°C	4	01, 03, 04	100		kV/V
			5, 6			50	
		V _O = ±30 V, R _L = 5 kΩ	4	02	100		
			5, 6			75	
Common mode rejection ratio	CMRR		4, 5, 6	All	80		dB

See footnotes at end of table.

**STANDARD
MICROCIRCUIT DRAWING**
DLA LAND AND MARITIME
COLUMBUS, OHIO 43218-3990

SIZE
A

78003

REVISION LEVEL
L

SHEET
5

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions <u>1/</u> -55°C ≤ T _A ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Input voltage range	V _{IR}	T _A = +25°C	1	01, 03, 04	±24		V
				02	±25		
Supply current	I _{CC}		1	01, 03, 04		4.0	mA
			2, 3			4.5	
			1	02		3.8	
			2, 3			4.0	
Short circuit current	I _{OS}	T _A = +25°C	1	All	12		mA
Slew rate <u>2/</u>	SR	A _V = 1, T _A = +25°C	4	01, 03, 04	1.4		V/μs
				02	3		

1/ Unless otherwise specified: R_S = 50 Ω, R_L = 5 kΩ; V_S = ±28 V for device types 01, 03, 04, and R_S = 100 Ω, V_S = ±40 V for device type 02.

2/ If not tested, shall be guaranteed to the limits specified in table I herein.

4.3 Quality conformance inspection. Quality conformance inspection shall be in accordance with method 5005 of MIL-STD-883 including groups A, B, C, and D inspections. The following additional criteria shall apply.

4.3.1 Group A inspection.

- a. Tests shall be as specified in table II herein.
- b. Subgroups 7, 8, 9, 10, and 11 in table I, method 5005 of MIL-STD-883 shall be omitted.

4.3.2 Groups C and D inspections.

- a. End-point electrical parameters shall be as specified in table II herein.
- b. Steady-state life test conditions, method 1005 of MIL-STD-883.
 - (1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1005 of MIL-STD-883.
 - (2) T_A = +125°C, minimum.
 - (3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		78003
		REVISION LEVEL L	SHEET 6

Device types	01, 02, 03, 04			
Case outlines	G	P	X	2
Terminal number	Terminal symbol			
1	BALANCE	BALANCE	BALANCE	NC
2	-INPUT	-INPUT	-INPUT	BALANCE
3	+INPUT	+INPUT	+INPUT	NC
4	-V _S	-V _S	-V _S	NC
5	BALANCE	BALANCE	BALANCE	-INPUT
6	OUTPUT	OUTPUT	OUTPUT	NC
7	+V _S	+V _S	+V _S	+INPUT
8	NC / COMPENSATION (SEE NOTE 1)	COMPENSATION	NC	NC
9	---	---	---	NC
10	---	---	---	-V _S
11	---	---	---	NC
12	---	---	---	BALANCE
13	---	---	---	NC
14	---	---	---	NC
15	---	---	---	OUTPUT
16	---	---	---	NC
17	---	---	---	+V _S
18	---	---	---	NC
19	---	---	---	NC
20	---	---	---	COMPENSATION

NOTES:

1. For device type 02 only, pin 8 is bandwidth control.
2. NC = No connection

FIGURE 1. Terminal connections.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		78003
		REVISION LEVEL L	SHEET 7

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (in accordance with MIL-STD-883, method 5005, table I)
Interim electrical parameters (method 5004)	- - -
Final electrical test parameters (method 5004)	1*, 2, 3, 4, 5, 6
Group A test requirements (method 5005)	1, 2, 3, 4, 5, 6
Groups C and D end-point electrical parameters (method 5005)	1, 2, 3

* PDA applies to subgroup 1.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38535, appendix A.

6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.

6.2 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.3 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished using DD Form 1692, Engineering Change Proposal.

6.4 Record of users. Military and industrial users shall inform DLA Land and Maritime when a system application requires configuration control and the applicable SMD to that system. DLA Land and Maritime will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronics devices (FSC 5962) should contact DLA Land and Maritime-VA, telephone (614) 692-8108.

6.5 Comments. Comments on this drawing should be directed to DLA Land and Maritime-VA, Columbus, Ohio 43218-3990, or telephone (614) 692-0540.

6.6 Approved sources of supply. Approved sources of supply are listed in MIL-HDBK-103 and QML-38535 . The vendors listed in MIL-HDBK-103 and QML-38535 have agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DLA Land and Maritime-VA.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		78003
		REVISION LEVEL L	SHEET 8

STANDARD MICROCIRCUIT DRAWING BULLETIN

DATE: 14-06-19

Approved sources of supply for SMD 78003 are listed below for immediate acquisition information only and shall be added to MIL-HDBK-103 and QML-38535 during the next revision. MIL-HDBK-103 and QML-38535 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DLA Land and Maritime-VA. This information bulletin is superseded by the next dated revision of MIL-HDBK-103 and QML-38535. DLA Land and Maritime maintains an online database of all current sources of supply at <http://www.dscc.dla.mil/Programs/Smcr/>.

Standard microcircuit drawing PIN <u>1/</u>	Vendor CAGE number	Vendor similar PIN <u>2/</u>
7800301GA	<u>3/</u>	LM144H/883
7800302GC	34371	HA2-2640/883
7800302PA	34371	HA7-2640/883
78003022A	<u>3/</u>	HA4-2640/883
7800303PA	34333	SG143Y/883B
7800303XA	34333	SG143T/883B
	3V146	LM143H/883
7800304PA	34333	SG1536Y/883B
	3V146	SG1536Y/883B
7800304XA	34333	SG1536T/883B
	3V146	LM1536H/883

1/ The lead finish shown for each PIN representing a hermetic package is the most readily available from the manufacturer listed for that part. If the desired lead finish is not listed contact the vendor to determine its availability.

2/ **Caution.** Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

3/ Not available from an approved source of supply.

STANDARD MICROCIRCUIT DRAWING BULLETIN – Continued.

<u>Vendor CAGE number</u>	<u>Vendor name and address</u>
34333	Microsemi Analog Mixed Signal Group 11861 Western Avenue Garden Grove, CA 92841-2119
34371	Intersil Corporation 1001 Murphy Ranch Road Milpitas, CA 95035-6803
3V146	Rochester Electronics Inc. 16 Malcolm Hoyt Drive Newburyport, MA 01950

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in the information bulletin.