

1

2

3

4


5

6

7



A

A

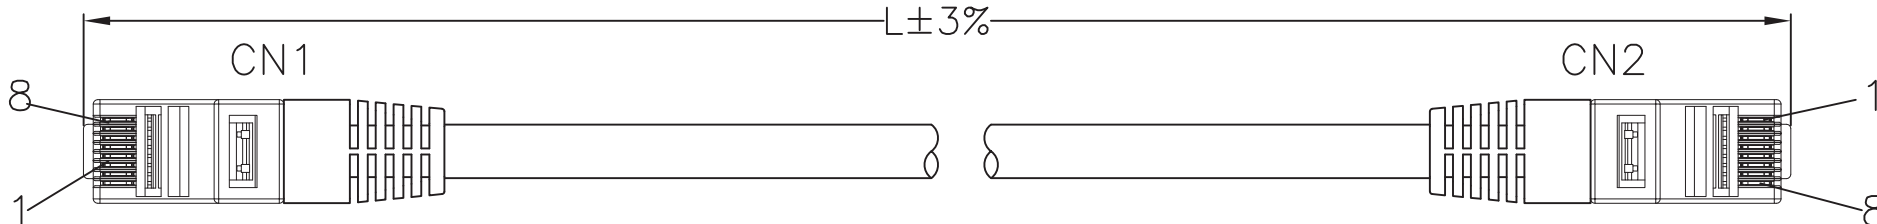




B

B

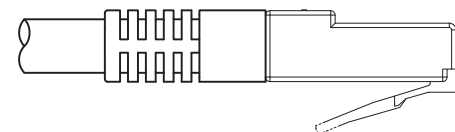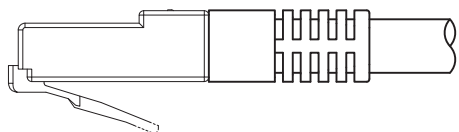


C

C

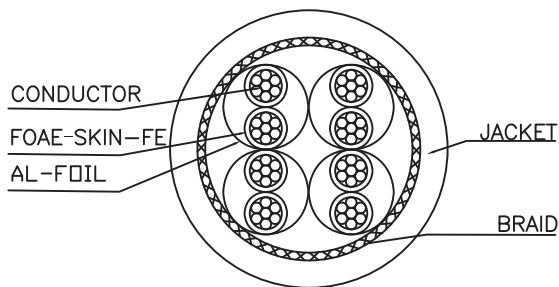

PIN OUT

CN1	WIRE COLOR	CN2
1	WHITE	1
2	ORANGE	2
3	WHITE	3
6	GREEN	6
4	BLUE	4
5	WHITE	5
7	WHITE	7
8	BROWN	8
SHELL	BRAID	SHELL

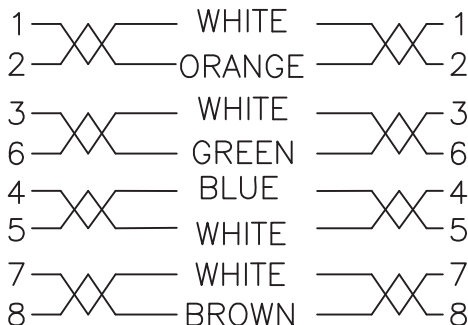

Material

- Cable: SSTP (26AWG*1PR+A)*4+B+PVC
- OD:5.8±0.2mm
- RJ45 Connector: 8P8C*2, Gold plated contacts, metal shielded
- Molding PVC: 45P
- Cable/Molding color: Red, Yellow, Green_or Blue

Electrical

- Open/short/intermittence: 100%

Order Code: A-MCSSP60xxx/x-R

Order lengths in meter: 0.5,1, 2,3,5,7,10,15,20,30

Order color: (R)Red, (Y)Yellow, (G)Green, (B)lue

D

D

E

E

F

F

G

G

H

H

Unit: mm



Scale	Free					Date	Name	Title
TOLERANCE						Drawn	Wilson	Cat6 SSTP Patch cable Shielded, 26AWG, colored
X.	±0.3					Approved	Groll	
X.X	±X							ASSMANN WSW-No. A-MCSSP60xxx/x-R
X.XX	±X							Drawing-No.
DIM	TOL							rev01
X.°	±X°	①	Updated all information	19.02.13	Wilson			
X.X°	±X°							Replace
Angle	TOL	Id.	Modification	Date	Name	<small>1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us</small>		Sheet 1/1

1

2

3

4

5

6

7