

1

2

3


4

5

6



7

A

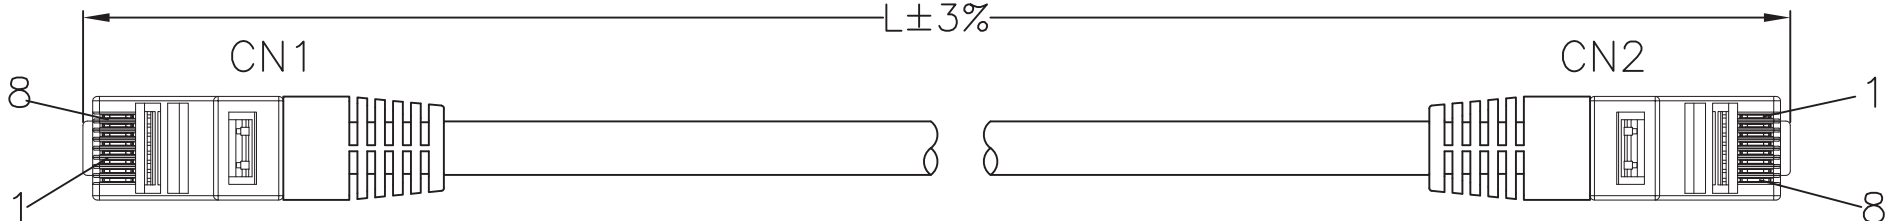




A

B

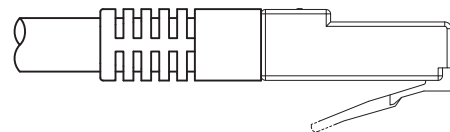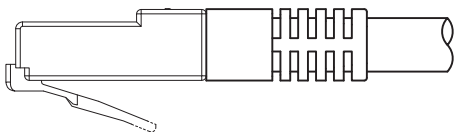

B

C

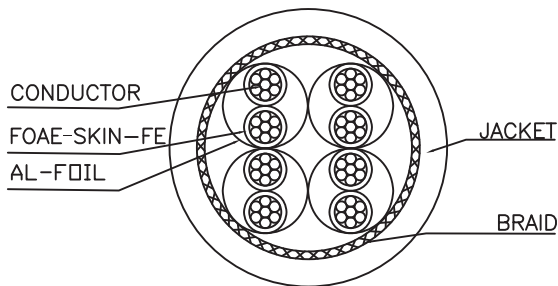

C

D

PIN OUT

D

CN1	WIRE COLOR	CN2
1	WHITE	1
2	ORANGE	2
3	WHITE	3
6	GREEN	6
4	BLUE	4
5	WHITE	5
7	WHITE	7
8	BROWN	8
SHELL	BRAID	SHELL

Material

- Cable: SSTP (26AWG*1PR+A)*4+B+PVC
- OD:5.8±0.2mm
- RJ45 Connector: 8P8C*2, Gold plated contacts, metal shielded
- Molding PVC: 45P
- Cable/Molding color: Red, Yellow, Green_or Blue

Electrical

- Open/short/intermittence: 100%

E

E

F

F

Order Code: A-MCSSP60xxx/x-R

Order lengths in meter: 0.5, 1, 2, 3, 5, 7, 10, 15, 20, 30

Order color: Red, Yellow, Green, Blue

G

G

Scale					Date	Name	Title	
TOLERANCE					Drawn	Wilson	Cat6 SSTP Patch cable 26AWG, colored	
X.	±X				Approved	Groll	ASSMANN WSW-No.	
X.X	±X						A-MCSSP60xxx/x-R	
X.XX	±X						Drawing-No.	
DIM	TOL						rev01	
X.°	±X°	①	Update	19.02.13			Wilson	
X.X°	±X°	①	Modification	Date			Name	Sheet
Angle	TOL	Id.					1/1	

Unit: mm



H

H

1

2

3

4

5

6

7