




Material:

- Conductor: 24AWG $7 \times 0.19 \pm 0.015$ mm
- Conductor Insulation color coding: (1) White/Orange, (1) Orange, (1) White/Green, (1) Green, (1) Blue, (1) White/Blue, (1) White/Brown, (1) Brown
- Cable jacket printing: DIGITUS Cat6 U-UTP PATCH CORD ISO/IEC 11801 & TIA/EIA 568-B.2-1 24AWGx4p CM(UL) C(UL)
- Wiring T568B Color
- P1 & P2 Contact plug: RJ45 8P8C 3" pc UL 94V-2
- Cable tie: White
- Cable jacket color: Black, White, Blue, or Grey
- Dielectric strength: 2.5KV dc-2seconds
- Working temperatures: $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$

PIN OUT		
P1	WIRE COLOR	P2
1	ORANGE/WHITE	1
2	ORANGE	2
3	GREEN/WHITE	3
6	GREEN	6
4	BLUE	4
5	BLUE/WHITE	5
7	BROWN/WHITE	7
8	BROWN	8

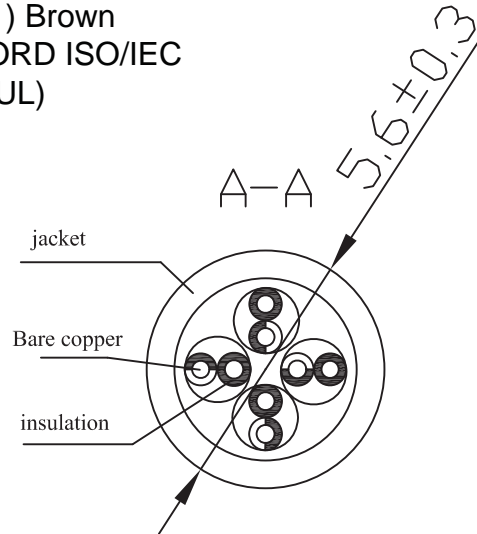

Unit: mm

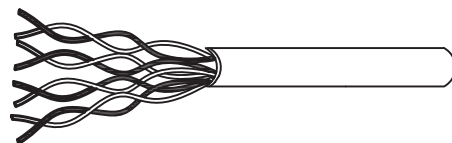

Scale	Free				Date	Name	Title
TOLERANCE					Drawn	Wilson	Cat6 UTP Patch cable Unshielded/Booted, 24AWG, 3μ"
X.	±0.3				Approved	Groll	ASSMANN WSW-No.
X.X	±X						DK-1611-xxx/x
X.XX	±X						Drawing-No.
DIM	TOL						rev00
X.°	±X°						
X.X°	±X°	ⓐ	Drawn	25.04.13	Wilson		Sheet
Angle	TOL	Id.	Modification	Date	Name		1/1

Order Code: DK-1611-xxx/x
 Order lengths in feet: 1,3,5,7,10,15, 20,25,50,100
 Cable Jacket colors: Black(BL), White(WH), Blue(B), Green(GR), or Grey(G)



1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
 Toll Free: 1-877-277-6266 • Email: info@assmann.us